






LED COMPONENTS
PRODUCT RANGE




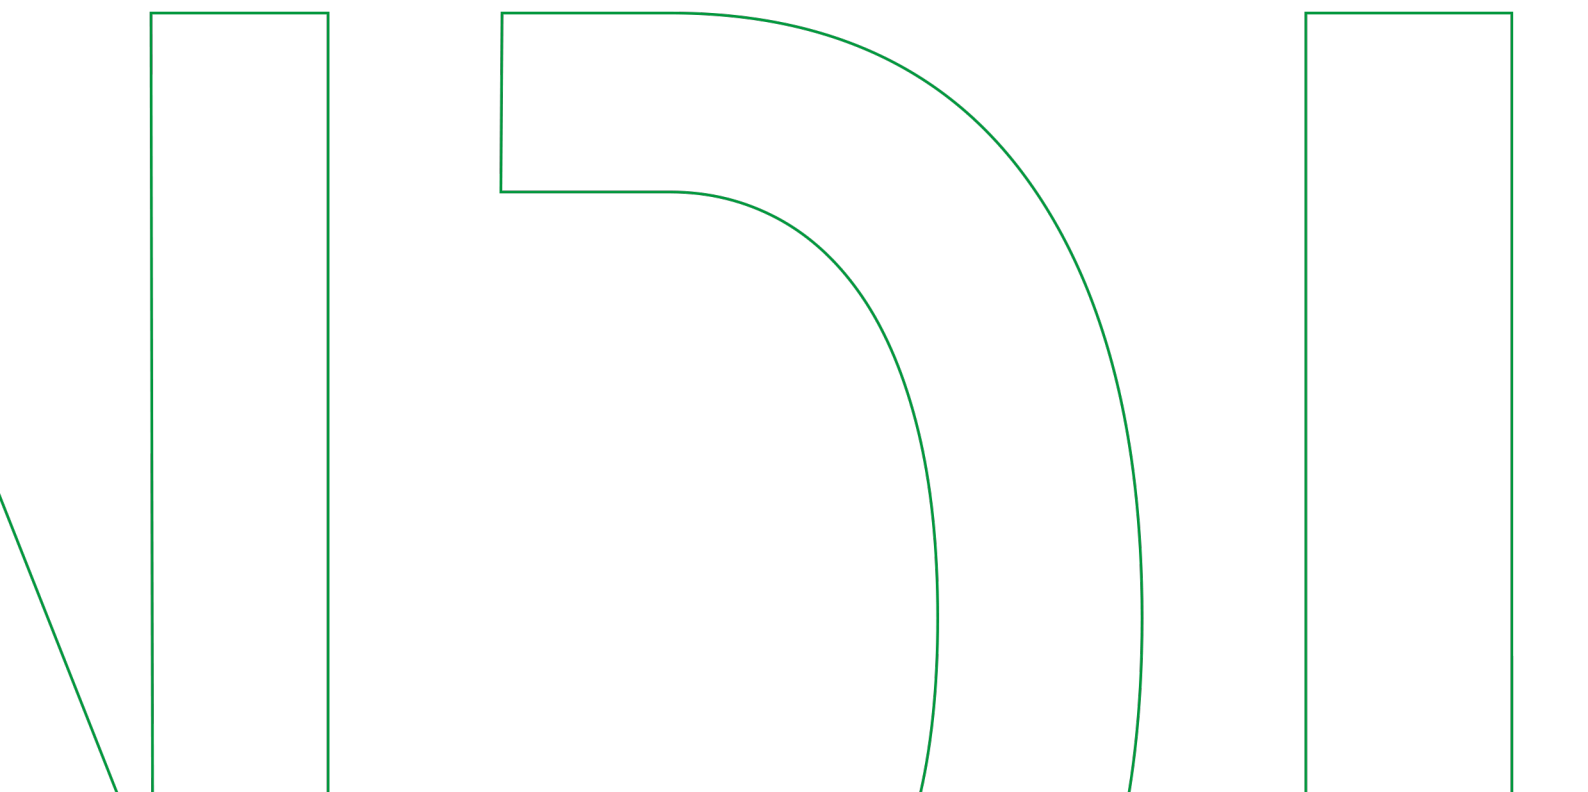

LED COMPONENTS
LED MODULES

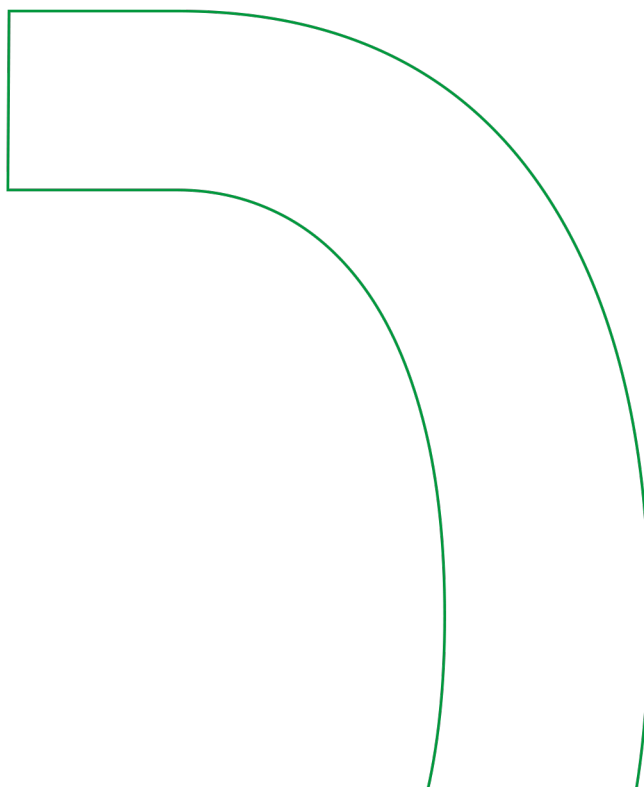

LED-MODUL Ø 17 MM MAX. 960MA 3000K CRI>90 10X LED LUMINUS CUBE 1616

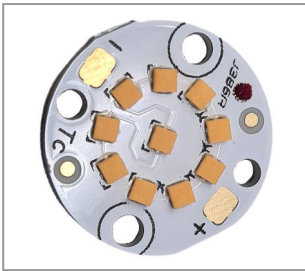

Product number

1100-0017-0960-9300

Height	2.8mm	beam angle:	170 degrees
Number of poles:	2	Color temperature:	3.000K
Channels:	1	Board material:	aluminium core
Solder pad:	Yes	Light output:	960lm
At CC:	850mA	CRI:	>90
Power supply:	CC	Weight:	1g
Power consumption:	9W	Surface and color:	white
Outer diameter:	17,0mm	IP Schutzart:	IP20

LED-MODUL Ø 17 MM MAX. 960MA 3000K CRI>90 10X LED LUMINUS CUBE 1616 M. KABEL SCHWARZ U.ROT 1000 MM




Product number

1100-0017-0960-9309

Height	2.7mm	Power consumption:	9W	Board material:	aluminium core
Number of poles:	2	Outer diameter:	17,0mm	Light output:	960lm
Channels:	1	Cable type:	single strand	CRI:	>90
Solder pad:	Yes	Cable length:	150mm	Weight:	1g
At CC:	960mA	Cable conversion:	FEP	Cable cross section:	0,5mm ²
Number of wires:	2	beam angle:	170 degrees	Surface and color:	white
Cable end processing:	tinned	Color temperature:	3.000K	IP Schutzart:	IP20
Power supply:	CC	Material:	Aluminium		

LED-MODUL Ø 17 MM MAX. 1000MA 2700K CRI>90 10X LED LUMINUS CUBE 1616 EPREL 880798

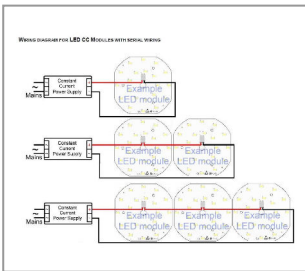


Product number

1100-0017-1000-9270

Height	2.8mm	Power consumption:	9W	At CC:	1000mA
Screw-on:	Yes	Color temperature:	2.700K	Material:	Aluminium
Number of poles:	2	Outer diameter:	17,0mm	Board material:	aluminium core
Channels:	1	CRI:	>93	Light output:	960lm
Solder pad:	Yes	Cable type:	single strand	Weight:	1g
Number of wires:	2	Cable length:	150mm	Cable cross section:	0,5mm ²
Cable end processing:	tinned	Cable conversion:	FEP	Surface and color:	white
Power supply:	CC	beam angle:	170 degrees	IP Schutzart:	IP20

LED-MODUL Ø 17 MM MAX. 1000MA 2700K CRI>90 10X LED LUMINUS CUBE 1616 M. KABEL SCHWARZ U. ROT 2000 MM

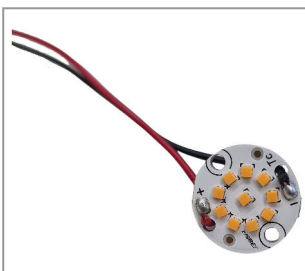


Product number

1100-0017-1000-9278

Height	2.8mm	Color temperature:	2.700K	Board material:	aluminium core
Number of poles:	2	Outer diameter:	17,0mm	Light output:	960lm
Channels:	1	Cable type:	single strand	CRI:	>90
Solder pad:	Yes	Cable conversion:	FEP	Weight:	1g
Number of wires:	2	beam angle:	170 degrees	Cable cross section:	0,5mm ²
Cable end processing:	tinned	At CC:	1000mA	Surface and color:	white
Power supply:	CC	Cable length:	2000mm	IP Schutzart:	IP20
Power consumption:	9W	Material:	Aluminium		


LED-MODUL Ø 17 MM MAX. 1000MA 2700K CRI>90 10X LED LUMINUS CUBE 1616 M. KABEL SCHWARZ U. ROT 150 MM

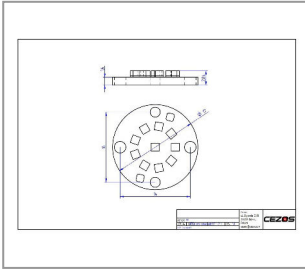

Product number 1100-0017-1000-9279

Color temperature:2.700K
Outer diameter: 17,0mm
Cable length: 150mm
At CC: 1000mA
Board material: aluminium core
CRI: >90
IP Schutzart: IP20

LED-MODUL Ø25 MM MAX.1.800MA 545LM 2700K CRI>90 2X AVX SMD CONNECTOR 1X LED OSRAM OSLON SQUARE FOR KATHOD SILVER JUNIOR



Product number 1100-0025-1800-9270

No image available


LED-MODUL Ø 35 MM MAX. 1400MA 2700K CRI> 90 35X LED LUMINUS CUBE 1919



Product number 1100-0035-1400-9270

Height	4mm	CRI:	>93
Screw-on:	Yes	beam angle:	180 degrees
Number of poles:	2	At CC:	1400mA
Channels:	1	Material:	Aluminium
Solder pad:	Yes	Board material:	aluminium core
Power supply:	CC	Surface and color:	white
Color temperature:	2.700K	IP Schutzart:	IP20
Outer diameter:	35,0mm		

LED-MODUL Ø 35 MM MAX. 1400MA 2700K CRI> 90 35X LED LUMINUS CUBE 1919 M. KABEL SCHWARZ U. ROT 150 MM

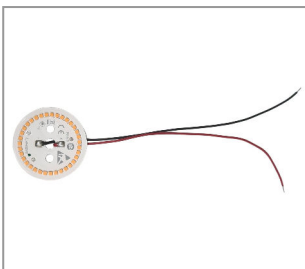

Product number 1100-0035-1400-9279

Height	5mm	Color temperature:	2.700K	Light output:	3900lm
Screw-on:	Yes	Outer diameter:	35,0mm	Material:	Aluminium
Number of poles:	2	Cable type:	single strand	Board material:	aluminium core
Channels:	1	Cable length:	150mm	CRI:	>90
Solder pad:	Yes	Cable cross section:	0,34mm ²	Surface and color:	white
Number of wires:	2	beam angle:	170 degrees	IP Schutzart:	IP20
Cable end processing:	tinned	Weight:	4,9g		
Power supply:	CC	At CC:	1400mA		

LED-MODUL Ø 60 MM 24V/DC 2700K CRI>90 M. PROXIDIMMER U. ERNI-KLEMMEN RÜCKSEITIG SCOTCH 3M KLEBEPAD




Product number	1100-0060-0024-9270		
Height	5mm	At CV:	24
Screw-on:	Yes	beam angle:	170 degrees
Number of poles:	2	Light output:	1450lm
Channels:	1	Material:	Aluminium
Plug contact:	Yes	Board material:	aluminium core
Color temperature:	2.700K	CRI:	>90
Weight:	9,15g	Surface and color:	white
Outer diameter:	60,0mm	IP Schutzart:	IP20

LED-MODUL Ø 70 MM MAX. 1000MA 2700K CRI> 90 M. ADELS-KLEMME




Product number	1100-0070-1000-9270		
Height	4mm	Light output:	900lm
Screw-on:	Yes	beam angle:	170 degrees
Number of poles:	2	Weight:	11,29g
Channels:	1	At CC:	1000mA
Plug contact:	Yes	Material:	Aluminium
Power supply:	CC	Board material:	aluminium core
Color temperature:	2.700K	CRI:	>90
Outer diameter:	70,0mm	Surface and color:	white
		IP Schutzart:	IP20

LED-MODUL Ø 140 MM MAX. 640MA 3000K CRI>80




Product number	1100-0140-0640-8300		
Height	4mm	beam angle:	120 degrees
Screw-on:	Yes	Weight:	99g
Number of poles:	2	At CC:	640mA
Channels:	1	Color temperature:	3.000K
Plug contact:	Yes	Light output:	1400lm
Board material:	FR4	CRI:	>90
Power supply:	CC	Surface and color:	white
Outer diameter:	140,0mm	IP Schutzart:	IP20

LED-MODUL Ø 170 MM 230V/AC 16W 3000K CRI>85 1600LM ALUPCB 42X LED SSC 5630HV WEISS

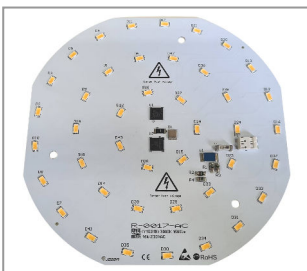

Product number	1100-0170-0230-8300		
Height	5mm	CRI:	>85
Screw-on:	Yes	Cable cross section:	0,75mm ²
Number of poles:	2	beam angle:	120 degrees
Weight:	90g	Outer diameter:	170,0mm
Number of wires:	2	Power supply:	AC - 230V
Cable conversion:	PVC	Color temperature:	3.000K
Surface:	PUR-Polyurethan	Material:	Aluminium
Cable end processing:	ferrule	IP Schutzart:	IP44
		Light output:	1760lm
		Power consumption:	16W
		Board material:	aluminium core
		Cable length:	120mm
		Cable type:	twin strands
		Surface and color:	white

LED-MODUL Ø 170 MM MAX. 825MA 3000K CRI>85 35X LED OSRAM DURIS E5 M. WAGO 2060 WEISS

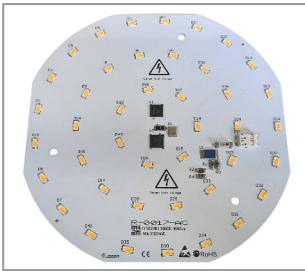

Product number


Height: 4mm
Screw-on: Yes
Number of poles: 2
Channels: 1
Plug contact: Yes
Weight: 90g
Board material: FR4
Power supply: CC

1100-0170-0825-8300

CRI: >85
beam angle: 120 degrees
Outer diameter: 170,0mm
Color temperature: 3.000K
At CC: 825mA
Light output: 1900lm
Material: Aluminium
Surface and color: white

IP Schutzart: IP20

LED-MODUL Ø 180 MM MAX. 1530MA 2700K CRI>90 LED LUMINUS 2016

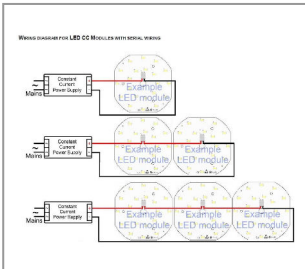


Product number

Height: 4mm
Screw-on: Yes
Number of poles: 2
Channels: 1
Plug contact: Yes
At CC: 1530mA
Diameter inside: 10,0mm
Board material: FR4

1100-0180-1530-9270

Power supply: CC
Color temperature: 2.700K
CRI: >93
beam angle: 120 degrees
Outer diameter: 180,0mm
IP Schutzart: IP20

LED-MODUL Ø 200 MM 24V/DC 12W 3000K CRI>85 1268LM



Product number

Height: 4mm
Screw-on: Yes
Number of poles: 2
Plug contact: Yes
Board material: FR4
Light output: 1268lm
Power supply: CV
CRI: >85

1100-0200-0024-8302

Weight: 103g
At CV: 24
beam angle: 120 degrees
Outer diameter: 200,0mm
Color temperature: 3.000K
Power consumption: 12W
Surface and color: white
IP Schutzart: IP20

LED-MODUL Ø 200 MM MAX. 1080MA 3500K CRI>85



Product number

Screw-on: Yes
Board material: FR4
Color temperature: 3.500K
CRI: >85
Outer diameter: 200,0mm
At CC: 1080mA
IP Schutzart: IP20


1100-0200-1080-8350

LED-MODUL Ø 230 MM MAX. 1155MA 3000K CRI>85 49X LED OSRAM DURIS E5 M. WAGO 2060 WEISS




Product number	1100-0230-1155-8300	
Height	4mm	Power supply: CC
Screw-on:	Yes	Outer diameter: 230,0mm
Number of poles:	2	CRI: >85
Channels:	1	Weight: 110g
Plug contact:	Yes	beam angle: 120 degrees
Board material:	FR4	Color temperature:3.000K
At CC:	1155mA	Surface and color: white
Light output:	3100lm	IP Schutzart: IP20

LED-MODUL Ø 260 MM MAX. 1680MA 3000K CRI>85




Product number	1100-0260-1680-8300	
Height	4mm	CRI: >85
Screw-on:	Yes	beam angle: 120 degrees
Number of poles:	2	Color temperature: 3.000K
Channels:	1	At CC: 1680mA
Plug contact:	Yes	Light output: 5160lm
Board material:	FR4	Outer diameter: 260,0mm
Weight:	118g	Power consumption:41W
Power supply:	CC	Surface and color: white
		IP Schutzart: IP20

LED-MODUL Ø 260 MM MAX. 1680MA 3500K CRI>85




Product number	1100-0260-1680-8350	
Height	4mm	Light output: 5200lm
Screw-on:	Yes	CRI: >85
Number of poles:	2	beam angle: 120 degrees
Channels:	1	Weight: 119g
Plug contact:	Yes	At CC: 1680mA
Board material:	FR4	Outer diameter: 260,0mm
Color temperature:	3.500K	Power consumption:41W
Power supply:	CC	Surface and color: white
		IP Schutzart: IP20

LED-MODUL Ø 320 MM MAX. 1530MA 3500K CRI>85



Product number	1100-0320-1530-8350	
Height	4mm	Power supply: CC
Screw-on:	Yes	CRI: >85
Number of poles:	2	Outer diameter: 320,0mm
Channels:	1	beam angle: 120 degrees
Plug contact:	Yes	Weight: 135g
At CC:	1530mA	Power consumption:49W
Board material:	FR4	Light output: 6100lm
Color temperature:	3.500K	Surface and color: white
		IP Schutzart: IP20

LED-MODUL Ø 320 MM MAX. 1530MA 3000K CRI>93




Product number

Height: 4mm
Screw-on: Yes
Number of poles: 2
Channels: 1
Plug contact: Yes
At CC: 1530mA
Diameter inside: 10,0mm
Board material: FR4

1100-0320-1530-9300

Outer diameter: 320,0mm
CRI: >93
beam angle: 120 degrees
Color temperature: 3.000K
Surface and color: white
IP Schutzart: IP20

LED-MODUL Ø 400 MM MAX. 1530MA 3000K CRI>85

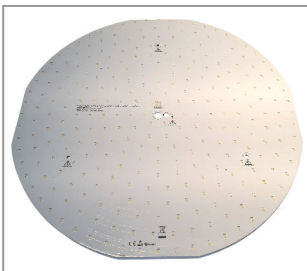


Product number

Screw-on: Yes
Number of poles: 2
Channels: 1
Plug contact: Yes
At CC: 1530mA
Board material: FR4
Power supply: CC
CRI: >85

1100-0400-1530-8300

beam angle: 120 degrees
Color temperature: 3.000K
Light output: 6100lm
Power consumption: 41W
Surface and color: white
IP Schutzart: IP20

LED-MODUL Ø 10 MM 2700K CC 2X LED OSLON RACE M. KABEL 10000 MM LG. U. 2X AUFGEKLEBTEM HALTER VERCHRO



Product number


Height: 10mm
Number of poles: 2
Channels: 1
Outer diameter: 10,0mm
Number of wires: 2
Cable end processing: tinned
Power supply: CC
Cable conversion: PVC

1100-10010-1200-8270

Color temperature: 2.700K
CRI: >85
Power consumption: 3W
At CC: 1200mA
Cable length: 1000mm
beam angle: 35 degrees
Board material: aluminium core
Light output: 390lm

Cable type: coaxial
Cable cross section: 0,5mm²
IP Schutzart: IP20

LED-MODUL Ø 10 MM 2700K CC 2X LED OSLON RACE M. KABEL 10000 MM LG. U. 2X AUFGEKLEBTEM HALTER SCHWARZ



Product number

1100-10010-1200-8271

LED-MODUL Ø 45 MM 230V/AC 8W 3000K CRI>85 800LM M. KABEL 280 MM VERGOSSEN M. REDUKTION F. REFLEKTOR KABEL ARTIKELNUMMER 3115-2075-0100-8727




Product number

1101-0045-0230-8307

Height	8mm	CRI:	>85	Color temperature:	3.000K
Screw-on:	Yes	Light output:	440lm	IP Schutzart:	IP44
Number of poles:	2	Outer diameter:	45,0mm	Cable conversion:	PTFE
Channels:	1	Cable length:	280mm	Board material:	aluminium core
Number of wires:	2	Cable cross section:	0,75mm ²	Cable type:	twin strands
Weight:	32g	beam angle:	120 degrees	Surface and color:	white
Surface:	PUR-Polyurethan	Power supply:	AC - 230V		
Cable end processing:	ferrule	Power consumption:	4W		

LED-MODUL Ø60 MM 24V/DC 2700K CRI>90 WITH 1.300MM CABLE BLACK/RED BACKSIDE SCOTCH 3M PAD

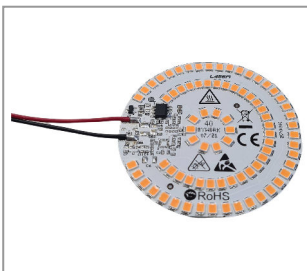


Product number

1101-0060-0024-9270

Height	3mm	Power consumption:	10W	Cable length:	1300mm
Number of poles:	2	Light output:	1200lm	Material:	Aluminium
Channels:	1	Weight:	10g	Board material:	aluminium core
Solder pad:	Yes	Cable type:	single strand	CRI:	>90
Number of wires:	2	Outer diameter:	60,0mm	Cable cross section:	0,5mm ²
Cable end processing:	tinned	At CV:	24	Surface and color:	white
Color temperature:	2.700K	Cable conversion:	FEP	IP Schutzart:	IP20
Power supply:	CV	beam angle:	120 degrees		

LED-MODUL Ø 80 MM 230V/AC 4W 3000K CRI>85 400LM ALUPCB WEISS 12X LED SSC 5630HV VERGOSSEN

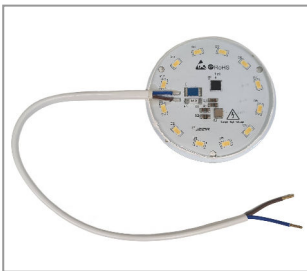

Product number

1101-0080-0230-8300

Height	8mm	CRI:	>85	Power consumption:	4W
Screw-on:	Yes	Light output:	440lm	Color temperature:	3.000K
Number of poles:	2	Cable length:	280mm	IP Schutzart:	IP44
Channels:	1	Cable conversion:	FEP	Board material:	aluminium core
Number of wires:	2	Cable cross section:	0,75mm ²	Cable type:	twin strands
Outer diameter:	80,0mm	beam angle:	120 degrees	Surface and color:	white
Surface:	PUR-Polyurethan	Weight:	49g		
Cable end processing:	ferrule	Power supply:	AC - 230V		

LED-MODUL Ø 80 MM 230V/AC 12W 3000K CRI>85 1200LM ALUPCB VERGOSSEN M. KABEL 280 MM U. BAJONETT F. LEDIL ANGELA M



Product number

1101-0080-0230-8306

Height	8mm	Surface:	PUR-Polyurethan	Color temperature:	3.000K
Screw-on:	Yes	Cable end processing:	ferrule	Material:	Aluminium
Number of poles:	2	CRI:	>85	IP Schutzart:	IP44
Channels:	1	Light output:	1200lm	Board material:	aluminium core
Number of wires:	2	Cable length:	280mm	Power consumption:	12W
Outer diameter:	80,0mm	Cable cross section:	0,75mm ²	Cable type:	twin strands
Cable conversion:	PVC	beam angle:	120 degrees	Surface and color:	white
Weight:	48g	Power supply:	AC - 230V		

LED-MODUL Ø 80 MM 230V/AC 29W 3000K CRI>85 3000LM ALUPCB VERGOSSEN M. KABEL 280 MM U. BAJONETT F. LEDIL ANGELA M



Product number

1101-0080-0230-8309

Height: 8mm	Weight: 48g	Power supply: AC - 230V
Screw-on: Yes	Surface: PUR-Polyurethan	Color temperature: 3.000K
Number of poles: 2	Cable end processing: ferrule	Material: Aluminium
Channels: 1	CRI: >85	IP Schutzart: IP44
Number of wires: 2	Power consumption: 29W	Board material: aluminium core
Outer diameter: 80,0mm	Cable length: 280mm	Cable type: twin strands
Light output: 3000lm	Cable cross section: 0,75mm ²	Surface and color: white
Cable conversion: PVC	beam angle: 120 degrees	

LED-MODUL Ø 130 MM 230V/AC 8W 3000K CRI>85 800LM ALUPCB VERGOSSEN M. KABEL 250 MM WEISS




Product number

1101-0130-0230-8300

Height: 8mm	Cable end processing: ferrule	Outer diameter: 130,0mm
Screw-on: Yes	CRI: >85	Material: Aluminium
Number of poles: 2	Cable length: 280mm	IP Schutzart: IP44
Channels: 1	Cable cross section: 0,75mm ²	Power consumption: 8W
Number of wires: 2	beam angle: 120 degrees	Board material: aluminium core
Light output: 880lm	Power supply: AC - 230V	Cable type: twin strands
Cable conversion: PVC	Color temperature: 3.000K	Surface and color: white
Surface: PUR-Polyurethan	Weight: 135g	

LED-MODUL Ø 170 MM 230V/AC 8W 3000K CRI>85 880LM ALUPCB WEISS 42X LED SSC 5630HV VERGOSSEN

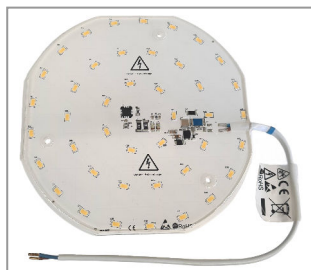


Product number

1101-0170-0230-8307

Height: 8mm	Cable end processing: ferrule	Color temperature: 3.000K
Screw-on: Yes	CRI: >85	Material: Aluminium
Number of poles: 2	Weight: 212g	IP Schutzart: IP44
Channels: 1	Cable length: 280mm	Power consumption: 8W
Number of wires: 2	Cable cross section: 0,75mm ²	Board material: aluminium core
Light output: 880lm	beam angle: 120 degrees	Cable type: twin strands
Cable conversion: PVC	Outer diameter: 170,0mm	Surface and color: white
Surface: PUR-Polyurethan	Power supply: AC - 230V	

LED-MODUL Ø 170 MM 230V/AC 16W 3000K CRI>85 1600LM ALUPCB WEISS 42X LED SSC 5630HV VERGOSSEN

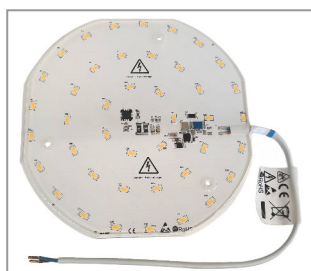


Product number

1101-0170-0230-8308


Height: 8mm	Weight: 212g	Material: Aluminium
Screw-on: Yes	Light output: 1600lm	IP Schutzart: IP44
Number of poles: 2	Cable length: 280mm	Power consumption: 16W
Number of wires: 2	Cable cross section: 0,75mm ²	Board material: aluminium core
Cable conversion: PVC	beam angle: 120 degrees	Cable type: twin strands
Surface: PUR-Polyurethan	Outer diameter: 170,0mm	Surface and color: white
Cable end processing: ferrule	Power supply: AC - 230V	
CRI: >85	Color temperature: 3.000K	

LED-MODUL Ø 400 MM MAX 1000MA 2X 65W 6.360LM 6500K UND 5500LM 2700K CRI>80



Product number **1102-0400-1000-2765**


LED-MODUL Ø 235 MM M. LED KRANZ 700MA 24W 3.000LM 2700K CRI>90 302X LED'S

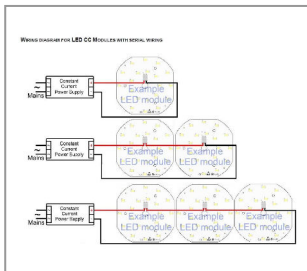

Product number **1105-0235-2400-9270**

Screw-on: Yes At CC: 2400mA
 Number of poles: 2 Surface and color:white
 Channels: 1 IP Schutzart: IP20
 Plug contact: Yes
 Board material: FR4
 Color temperature:2.700K
 CRI: >93
 beam angle: 120 degrees

LED-MODUL VERGOSSEN Ø45 MM 230V/AC 8W 3000K CRI>80 962LM M. KABEL 2X0,75 FLACH FEP/FEP 280 MM

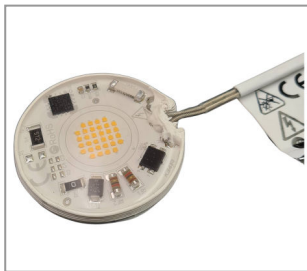

Product number **1111-0045-0230-8300**

Height 5.5mm Color temperature: 3.000K
 Weight: 20,55g Material: Aluminium
 Outer diameter: 45,0mm Power consumption:8W
 CRI: >80 Board material: aluminium core
 Cable length: 280mm
 Light output: 962lm
 Power supply: AC - 230V
 Surface: Spotted


LED MODULE Ø115MM 185-260V/AC 12W 3.000K ALUPCB AND OPTIC 24LED 2835



Product number **1125-0115-0265-8300**

Height 10mm	Light output: 1200lm	Power consumption:12W
Screw-on: Yes	beam angle: 45 degrees	Cable length: 110mm
Number of poles: 2	Weight: 10g	Cable type: twin strands
Channels: 1	CRI: >80	Surface and color: white
Board material: FR4	Cable cross section:0,75mm ²	Material: Plastic
Number of wires: 2	Outer diameter: 115,0mm	IP Schutzart: IP20
Cable conversion: PVC	Power supply: AC - 230V	
Cable end processing:ferrule	Color temperature: 3.000K	

LED MODULE Ø170MM 185-260V/AC 24W 3.000K ALUPCB AND OPTIC 48XLED 2835

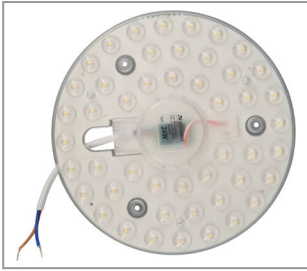

Product number


Height: 10mm
Screw-on: Yes
Number of poles: 2
Channels: 1
Board material: FR4
Number of wires: 2
Light output: 2400lm
Cable conversion: PVC

1125-0170-0265-8300

Cable end processing: ferrule
beam angle: 45 degrees
CRI: >80
Cable cross section: 0,75mm²
Outer diameter: 170,0mm
Weight: 15g
Power supply: AC - 230V
Color temperature: 3.000K

Power consumption: 24W
Cable length: 110mm
Cable type: twin strands
Surface and color: white
Material: Plastic
IP Schutzart: IP20

LED MODULE Ø230MM 185-260V/AC 36W 3.000K ALUPCB AND OPTIC 72LED 2835

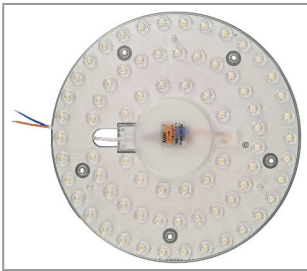

Product number

Height: 10mm
Screw-on: Yes
Number of poles: 2
Channels: 1
Board material: FR4
Number of wires: 2
Light output: 3600lm
Outer diameter: 230,0mm

1125-0230-0265-8300

Cable conversion: PVC
Cable end processing: ferrule
beam angle: 45 degrees
CRI: >80
Cable cross section: 0,75mm²
Power supply: AC - 230V
Color temperature: 3.000K
Weight: 20g

Power consumption: 36W
Cable length: 110mm
Cable type: twin strands
Surface and color: white
Material: Plastic
IP Schutzart: IP20

LED-MODUL Ø 200 MM BEIDSEITIG BESTÜCKT M. LED KRANZ U. DIMMERSTEUERUNG 24V/DC 34W 2700K CRI>85 3800LM BIN B7V




Product number

Board material: FR4
beam angle: 360 degrees
Color temperature: 2.700K
Power supply: CV
CRI: >85
Power consumption: 34W
At CV: 24
Outer diameter: 200,0mm

1165-0200-0024-8270

Light output: 3800lm
IP Schutzart: IP20

LED-MODUL Ø 200 MM BEIDSEITIG BESTÜCKT M. LED KRANZ U. DIMMERSTEUERUNG 24V/DC 34W 2700K CRI>85 3800LM NEUE GENERATION



Product number

1165-0200-0024-8271

LED-MODUL Ø 200 MM BEIDSEITIG BESTÜCKT M. LED KRANZ U. DIMMERSTEUERUNG 24V/DC 34W 3000K CRI>85 4100LM




Product number

1165-0200-0024-8300

Height	10mm	beam angle:	360 degrees	Color temperature:	3.000K
Screw-on:	Yes	Light output:	4200lm	Surface and color:	white
Number of poles:	2	Power supply:	CV	IP Schutzart:	IP20
Channels:	1	CRI:	>85		
Plug contact:	Yes	Power consumption:	34W		
Diameter inside:	10,0mm	At CV:	24		
Board material:	FR4	Weight:	72g		
Control:	Yes	Outer diameter:	200,0mm		

LED-MODUL 150X150 MM 24V/DC 13W 3000K CRI>85 1297LM

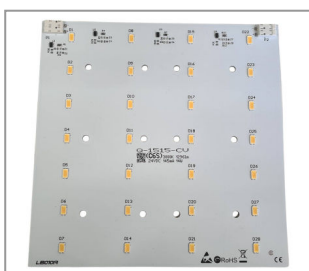

Product number

1200-0150-0024-8300

Height	4mm	Board material:	FR4	Color temperature:	3.000K
Width	150mm	Power supply:	CV	Surface and color:	white
Länge:	150mm	CRI:	>85	IP Schutzart:	IP20
Screw-on:	Yes	Light output:	1300lm		
Number of poles:	2	At CV:	24		
Channels:	1	beam angle:	120 degrees		
Plug contact:	Yes	Power consumption:	13W		
Diameter inside:	10,0mm	Weight:	81g		

LED-MODUL 150X150 MM 24V/DC 13W 3000K CRI>85 1297LM M. ML




Product number

1200-0150-0024-8302

Height	4mm	Board material:	FR4	Color temperature:	3.000K
Width	150mm	Power supply:	CV	Surface and color:	white
Länge:	150mm	CRI:	>85	IP Schutzart:	IP20
Screw-on:	Yes	Light output:	1300lm		
Number of poles:	2	At CV:	24		
Channels:	1	beam angle:	120 degrees		
Plug contact:	Yes	Power consumption:	13W		
Diameter inside:	10,0mm	Weight:	78g		

LED-MODUL 150X150 MM MAX. 660MA 3000K CRI>85

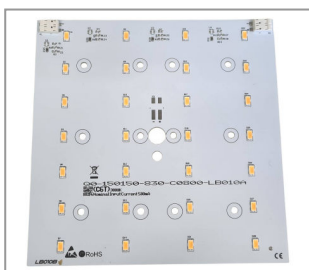


Product number

1200-0150-0660-8300

Height	4mm	Board material:	FR4	Weight:	77g
Width	150mm	Power supply:	CC	Surface and color:	white
Länge:	150mm	CRI:	>85	IP Schutzart:	IP20
Screw-on:	Yes	Light output:	1300lm		
Number of poles:	2	beam angle:	120 degrees		
Channels:	1	Power consumption:	13W		
Plug contact:	Yes	Color temperature:	3.000K		
Diameter inside:	10,0mm	At CC:	660mA		

LED-MODUL 150X150 MM MAX. 1530MA 3000K CRI>90

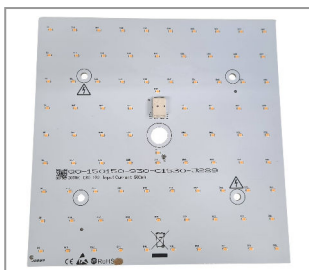


Product number	1200-0150-1530-9300		
Height	4mm	Diameter inside:	10,0mm
Width	150mm	Board material:	FR4
Länge:	150mm	Power supply:	CC
Screw-on:	Yes	Power consumption:	26W
Number of poles:	2	CRI:	>93
Channels:	1	beam angle:	120 degrees
Plug contact:	Yes	Light output:	2900lm
At CC:	1530mA	Color temperature:	3.000K
		Weight:	77g
		Surface and color:	white
		IP Schutzart:	IP20

LED-MODUL 200X200 MM MAX. 900MA 3000K CRI>85



Product number	1200-0200-0900-8300		
Height	4mm	Board material:	FR4
Width	200mm	Power supply:	CC
Länge:	200mm	Power consumption:	20W
Screw-on:	Yes	CRI:	>85
Number of poles:	2	Weight:	140g
Channels:	1	beam angle:	120 degrees
Plug contact:	Yes	Light output:	2200lm
Diameter inside:	10,0mm	Color temperature:	3.000K
		At CC:	900mA
		Surface and color:	white
		IP Schutzart:	IP20

LED-MODUL 200X200 MM MAX. 1530MA 3000K CRI>90

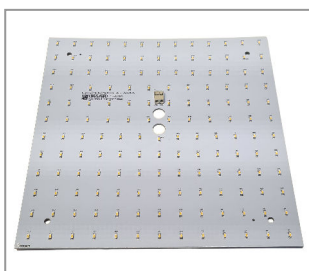

Product number	1200-0200-1530-9300		
Height	4mm	Diameter inside:	10,0mm
Width	200mm	Board material:	FR4
Länge:	200mm	Light output:	5500lm
Screw-on:	Yes	Power supply:	CC
Number of poles:	2	Weight:	149g
Channels:	1	beam angle:	120 degrees
Plug contact:	Yes	Power consumption:	48W
At CC:	1530mA	Color temperature:	3.000K
		CRI:	>90
		Surface and color:	white
		IP Schutzart:	IP20

LED-MODUL 270X270 MM 24V/DC 27W 3000K CRI>85 2600LM




Product number	1200-0270-0024-8309		
Height	4mm	Board material:	FR4
Width	270mm	Power consumption:	27W
Länge:	270mm	Power supply:	CV
Screw-on:	Yes	CRI:	>85
Number of poles:	2	Weight:	245g
Channels:	1	At CV:	24
Plug contact:	Yes	beam angle:	120 degrees
Diameter inside:	10,0mm	Color temperature:	3.000K
		Light output:	2700lm
		IP Schutzart:	IP20

LED-MODUL 270X270 MM MAX. 1980MA 3000K CRI>85



Product number		1200-0270-1980-8308	
Height	4mm	Board material:	FR4
Width	270mm	Power supply:	CC
Länge:	270mm	CRI:	>85
Screw-on:	Yes	Light output:	3300lm
Number of poles:	2	Weight:	245g
Channels:	1	beam angle:	120 degrees
Plug contact:	Yes	Power consumption:	30W
Diameter inside:	10,0mm	Color temperature:	3.000K
		At CC:	1980mA
		Surface and color:	white
		IP Schutzart:	IP20

LED-MODUL 110X90 MM 230V/AC 16W 3000K CRI>85 1780LM ALUPCB 33X LED SSC 5630HV VERGOSSEN WEISS

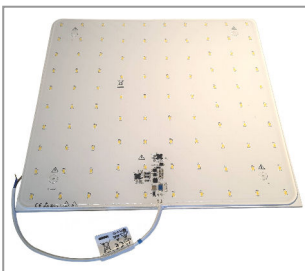

Product number		1201-0110-0230-8300	
Height	6mm	Surface:	PUR-Polyurethan Material:
Width	90mm	Cable end processing:	ferrule
Länge:	110mm	CRI:	>85
Screw-on:	Yes	Cable length:	280mm
Number of poles:	2	Cable cross section:	0,75mm ²
Channels:	1	beam angle:	120 degrees
Number of wires:	2	Power supply:	AC - 230V
Cable conversion:	PVC	Color temperature:	3.000K
		IP Schutzart:	IP44
		Power consumption:	16W
		Board material:	aluminium core
		Light output:	1780lm
		Surface and color:	white

LED-MODUL 130X130 MM 230V/AC 8W 3000K CRI>85 1600LM ALUPCB 42X LED SSC 5630HV VERGOSSEN WEISS



Product number		1201-0130-0230-8307	
Height	8mm	Cable end processing:	ferrule
Width	130mm	CRI:	>85
Länge:	130mm	Cable length:	280mm
Number of poles:	2	Cable cross section:	0,75mm ²
Channels:	1	beam angle:	120 degrees
Number of wires:	2	Power supply:	AC - 230V
Cable conversion:	PVC	Color temperature:	3.000K
Surface:	PUR-Polyurethan	Weight:	170g
		Material:	Aluminium
		IP Schutzart:	IP44
		Power consumption:	8W
		Board material:	aluminium core
		Light output:	800lm
		Cable type:	twin strands
		Surface and color:	white

LED-MODUL 130X130 MM 230V/AC 16W 3000K CRI>85 1600LM ALUPCB 42X LED SSC 5630HV VERGOSSEN WEISS



Product number		1201-0130-0230-8308	
Height	8mm	Cable end processing:	ferrule
Width	130mm	CRI:	>85
Länge:	130mm	Light output:	1600lm
Screw-on:	Yes	Cable length:	280mm
Number of poles:	2	Cable cross section:	0,75mm ²
Number of wires:	2	beam angle:	120 degrees
Cable conversion:	PVC	Power supply:	AC - 230V
Surface:	PUR-Polyurethan	Color temperature:	3.000K
		Weight:	166g
		Material:	Aluminium
		IP Schutzart:	IP44
		Power consumption:	16W
		Board material:	aluminium core
		Cable type:	twin strands
		Surface and color:	white

LED-MODUL 130X130 MM 230VAC 32W 3000K CRI>85 3560LM ALUPCB 66X LED SSC 5630HV VERGOSSEN WEISS




Product number

Height: 8mm
Width: 130mm
Länge: 130mm
Screw-on: Yes
Number of poles: 2
Channels: 1
Number of wires: 2
Cable conversion: PVC

1201-0130-0230-8309

Surface: PUR-Polyurethan
Cable end processing: ferrule
Light output: 3560lm
CRI: >85
Cable length: 280mm
Cable cross section: 0,75mm²
beam angle: 120 degrees
Power consumption: 32W
Power supply: AC - 230V
Color temperature: 3.000K
Weight: 166g
Material: Aluminium
IP Schutzart: IP44
Board material: aluminium core
Cable type: twin strands
Surface and color: white

LED-MODUL 130X130 MM 230V/AC 16W 4000K CRI>85 1600LM ALUPCB 42X LED SSC 5630HV VERGOSSEN WEISS

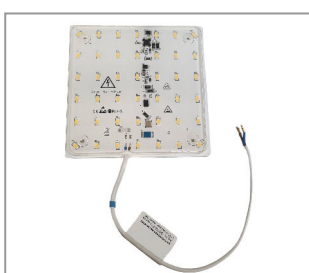


Product number

Height: 8mm
Width: 130mm
Länge: 130mm
Screw-on: Yes
Number of poles: 2
Channels: 1
Number of wires: 2
Cable conversion: PVC

1201-0130-0230-8400

Surface: PUR-Polyurethan
Cable end processing: ferrule
CRI: >85
Light output: 1600lm
Cable length: 280mm
Cable cross section: 0,75mm²
beam angle: 120 degrees
Power supply: AC - 230V
Weight: 166g
Material: Aluminium
IP Schutzart: IP44
Color temperature: 4.000K
Power consumption: 16W
Board material: aluminium core
Cable type: twin strands
Surface and color: white

LED-MODUL 200X200 MM 230V/AC 16W 3000K CRI>85 1600LM ALUPCB 39X LED SSC 5630HV VERGOSSEN WEISS




Product number

Width: 200mm
Länge: 200mm
Screw-on: Yes
Number of poles: 2
Channels: 1
CRI: >85
Light output: 1600lm
Power supply: AC - 230V

1201-0200-0230-8300

Color temperature: 3.000K
Material: Aluminium
Power consumption: 16W
Board material: aluminium core
Surface and color: white

LED-MODUL 230X230 MM 230V/AC 16W 3000K CRI>85 1600LM ALUPCB 60X LED SSC 5630HV WEISS




Product number

Width: 230mm
Länge: 230mm
Screw-on: Yes
Number of poles: 2
CRI: >85
Light output: 1600lm
Power supply: AC - 230V
Color temperature: 3.000K

1201-0230-0230-8300


Material: Aluminium
Power consumption: 16W
Board material: aluminium core
Surface and color: white

LED-MODUL 340X340 MM 230V/AC 36W 3000K CRI>85 3950LM ALUPCB 96X LED SSC 5630HV WEISS




Product number **1201-0340-0230-8300**
Width 340mm Color temperature: 3.000K
Länge: 340mm Power consumption:36W
Number of poles:2 Surface and color: white
Light output: 3950lm
Surface: PUR-Polyurethan
CRI: >85
Weight: 1,087kg
Power supply: AC - 230V

LED-MODUL 38,5X11MM MAX. 150MA 11-12,2V 4.000K CRI>90 F. BLACKLINE 2X2



Product number **1300-0038-0150-8400**

LED-MODUL 38,5X11MM 150MA 11-12,2V 2W 270LM 3.000K CRI>90 F. BLACKLINE 2X2




Product number **1300-0038-0150-9300**

LED-MODUL 38,5X11MM 150MA 11-12,2V 2W 280LM 4.000K CRI>90 F. BLACKLINE 2X2



Product number **1300-0038-0150-9400**

LED-MODUL 70X24 MM MAX. 360MA 3.000K CRI>80

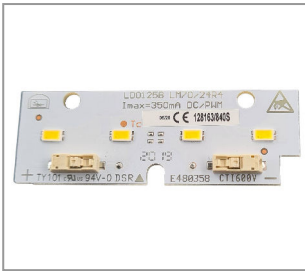

Product number **1300-0070-0360-8300**

Width 24mm

Länge: 70mm

Number of poles: 2


Power supply: CC

At CC: 360mA

CRI: >80

Color temperature:3.000K

LED-MODUL 70X24 MM MAX. 360MA 4.000K CRI>80

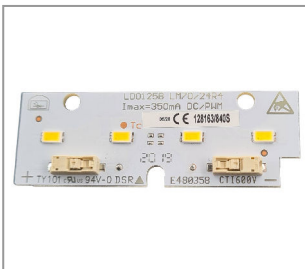

Product number **1300-0070-0360-8400**

Width 24mm

Länge: 70mm

Number of poles: 2

Power supply: CC

At CC: 360mA

CRI: >80

Color temperature:4.000K

LED-MODUL 70X49 MM F. 1X 2X2 OPTIK @320MA 15W 48V 2355LM MAX.480MA 5000K CRI>80 ALU PCB



Product number **1300-0070-0480-8500**

Width 49mm

Länge: 70mm

Screw-on: Yes

Plug contact: Yes

Power supply: CC

At CC: 320mA

CRI: >80

Power consumption:15W

Color temperature:5.000K


Light output: 2355lm

Material: Aluminium

Board material: aluminium core

Surface and color: white

LED-MODUL 70X49 MM F. 1X 2X2 OPTIK @700MA 8W 12V 1400LM MAX.1500MA 4000K CRI>80 ALU PCB



Product number **1300-0070-1500-8400**

Width 49mm

Länge: 70mm

Screw-on: Yes

Plug contact: Yes

Power supply: CC

CRI: >80

Light output: 1400lm

Material: Aluminium

Color temperature: 4.000K


Power consumption:8W

Board material: aluminium core

At CC: 700mA

Surface and color: white

LED-MODUL 92X12MM 150MA 36V 6W 900LM 3.000K CRI>90 F. BLACKLINE M



Product number

Width: 12mm
Länge: 92mm
Screw-on: Yes
Solder pad: Yes
Power supply: CC
Light output: 900lm
Color temperature: 3.000K
At CC: 150mA

1300-0092-1000-9300

Material: Aluminium
Power consumption: 6W
Board material: aluminium core
CRI: >90
Surface and color: white

LED-MODUL 95X12MM 150MA 36V 6W 900LM 3.000K CRI>90 F. BLACKLINE S




Product number

Width: 12mm
Länge: 95mm
Screw-on: Yes
Solder pad: Yes
Power supply: CC
Light output: 900lm
Material: Stainless steel
Color temperature: 3.000K

1300-0095-1000-9300

At CC: 150mA
Power consumption: 6W
Board material: aluminium core
CRI: >90
Surface and color: white

LED-MODUL 95X12MM 150MA 36V 6W 900LM 4.000K CRI>90 F. BLACKLINE S




Product number

Width: 12mm
Länge: 95mm
Screw-on: Yes
Solder pad: Yes
Power supply: CC
Light output: 900lm
At CC: 150mA
Material: Aluminium

1300-0095-1000-9400

Color temperature: 4.000K
Power consumption: 6W
Board material: aluminium core
CRI: >90
Surface and color: white

LED-MODUL 121X49 MM F. 2X 2X2 OPTIK @700MA 16W 24V 2320LM MAX.1500MA 3000K CRI>80 ALU PCB




Product number

Width: 49mm
Länge: 121mm
Screw-on: Yes
Plug contact: Yes
Light output: 2320lm
Power supply: CC
CRI: >80
Color temperature: 3.000K

1300-0121-1500-8300

Material: Aluminium
Power consumption: 16W
Board material: aluminium core
At CC: 700mA
Surface and color: white

LED-MODUL 121X49 MM F. 2X 2X2 OPTIK @700MA 16W 24V 2480LM MAX.1500MA 4000K CRI>80 ALU PCB




Product number

Width 49mm
Länge: 121mm
Screw-on: Yes
Plug contact: Yes
Power supply: CC
CRI: >80
Light output: 2480lm
Material: Aluminium

1300-0121-1500-8400

Color temperature: 4.000K
Power consumption:16W
Board material: aluminium core
At CC: 700mA
Surface and color: white

LED-MODUL 121X49 MM F. 2X 2X2 OPTIK @700MA 16W 24V 2800LM MAX.1500MA 5000K CRI>80 ALU PCB




Product number

Width 49mm
Länge: 121mm
Screw-on: Yes
Plug contact: Yes
Light output: 2800lm
Power supply: CC
CRI: >80
Color temperature:5.000K

1300-0121-1500-8500

Material: Aluminium
Power consumption:16W
Board material: aluminium core
At CC: 700mA
Surface and color: white

LED-MODUL 5050 LED'S 145X45 MM F. 1X 2X6 OPTIK @960MA 46W 36V 7222LM MAX.1500MA 5000K CRI>80 ALU PCB




Product number

Width 45mm
Länge: 145mm
Screw-on: Yes
Plug contact: Yes
At CC: 960mA
Power consumption:46W
Power supply: CC
CRI: >80

1300-0145-1440-8500

Light output: 7222lm
Color temperature:5.000K
Material: Aluminium
Board material: aluminium core
Surface and color: white

LED-MODUL 3535LED'S 145X45 MM F. 1X 2X6 OPTIK @350MA 12,6W 36V 2050LM MAX.1500MA 5000K CRI>80 ALU PCB




Product number

Width 45mm
Länge: 145mm
Screw-on: Yes
Plug contact: Yes
Light output: 2050lm
Power supply: CC
At CC: 350mA
CRI: >80

1300-0145-1500-8500

Color temperature:5.000K
Material: Aluminium
Board material: aluminium core
Surface and color: white

LED-MODUL 145X44 MM 2X6 MAX. 3600MA 5000K CRI>70 BESCHRIFTUNG OPT

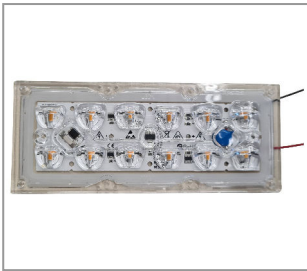


Product number	1300-0145-3600-7500
Height	5mm
Width	44mm
Länge:	145mm
Screw-on:	Yes
Number of poles:	2
Channels:	1
Plug contact:	Yes
Board material:	FR4
Weight:	28g
Power supply:	CC
CRI:	>70
At CC:	3600mA
Color temperature:	5.000K
Material:	Aluminium
Surface and color:	white
IP Schutzart:	IP20

LED-MODUL 147X45 MM 230V/AC 13W 3000K CRI>85 1300LM 12X LED OSRAM S8 M. LEDIL OPTIK CS14597 HP-IP-2X6-0




Product number	1300-0147-0230-8300
Width	45mm
Länge:	147mm
Number of poles:	2
CRI:	>85
Light output:	1300lm
Power consumption:	13W
Power supply:	AC - 230V
Color temperature:	3.000K

LED-MODUL 154X23MM 24V 3000K CRI>90 PASSEND F. BLACKLINE OPTIK U. PROFIL




Product number	1300-0154-0024-9300
-----------------------	----------------------------

LED-MODUL 154X23MM MAX. 400MA 3000K CRI>90 PASSEND F. BLACKLINE L OPTIK U. PROFIL




Product number	1300-0154-0400-9300
Width	23mm
Länge:	154mm
Number of poles:	2
Power supply:	CC
Color temperature:	3.000K
At CC:	400mA
CRI:	>90

LED-MODUL 159X29MM 4X 1POL SMD KLEMME MAX. 400MA 4000K CRI>90 PASSEND F. BLACKLINE OPTIK U. PROFIL



Product number 1300-0159-0400-9404


LED-MODUL 172X49 MM F. 3X 2X2 OPTIK @700MA 24W 36V 3720LM MAX.1500MA 4000K CRI>80 ALU PCB



Product number 1300-0172-1500-8400

Width	49mm	Material:	Aluminium
Länge:	172mm	Color temperature:	4.000K
Screw-on:	Yes	Board material:	aluminium core
Plug contact:	Yes	At CC:	700mA
Power supply:	CC	Surface and color:	white
Light output:	3720lm		
CRI:	>80		
Power consumption:	24W		


LED-MODUL 172X49 MM F. 3X 2X2 OPTIK @700MA 24W 36V 3720LM MAX.1500MA 5000K CRI>80 ALU PCB



Product number 1300-0172-1500-8500


Width	49mm	Power consumption:	24W
Länge:	172mm	Material:	Aluminium
Screw-on:	Yes	Board material:	aluminium core
Plug contact:	Yes	At CC:	700mA
Power supply:	CC	Surface and color:	white
Light output:	3720lm		
CRI:	>80		
Color temperature:	5.000K		

LED-MODUL 223X49 MM F. 4X 2X2 OPTIK @700MA 32W 45V 5056LM 3000K CRI>80 ALU PCB



Product number 1300-0223-0700-8300

LED-MODUL 223X49 MM F. 4X 2X2 OPTIK @700MA 32W 48V 4960LM MAX.1500MA 3000K CRI>80 ALU PCB



Product number 1300-0223-1500-8300

LED-MODUL 223X49 MM F. 4X 2X2 OPTIK @700MA 32W 48V 4960LM MAX.1500MA 4000K CRI>80 ALU PCB



Product number 1300-0223-1500-8400

Width	49mm	Material:	Aluminium
Länge:	233mm	Color temperature:	4.000K
Screw-on:	Yes	Board material:	aluminium core
Plug contact:	Yes	At CC:	700mA
Power supply:	CC	Surface and color:	white
CRI:	>80		
Power consumption:	32W		
Light output:	4960lm		

LED-MODUL 230X35 MM MAX. 720MA 3000K CRI>85 M. ADELS-KLEMME



Product number 1300-0230-0720-8300

Width	35mm
Länge:	230mm
Number of poles:	2
At CC:	720mA
Weight:	26,23g
Power supply:	CC
CRI:	>85
Color temperature:	3.000K


LED-MODUL 280X24 MM MAX. 360MA 3.000K CRI>80



Product number 1300-0280-0360-8300


Width	24mm	Color temperature:	3.000K
Länge:	280mm		
Number of poles:	2		
Plug contact:	Yes		
Board material:	FR4		
Power supply:	CC		
At CC:	360mA		
CRI:	>80		

LED-MODUL 280X24 MM MAX. 360MA 4.000K CRI>80



Product number	1300-0280-0360-8400
Width	24mm
Länge:	280mm
Screw-on:	Yes
Number of poles:	2
Plug contact:	Yes
Board material:	FR4
Power supply:	CC
At CC:	360mA
CRI:	>80
Color temperature:	4.000K

LED-MODUL 280X55 MM MAX. 480MA 3000K CRI>80 M. 2X 1POL. SMD KLEMME RÜCKSEITIG




Product number	1300-0280-0480-8301
Width	55mm
Länge:	280mm
Screw-on:	Yes
Number of poles:	2
Plug contact:	Yes
Board material:	FR4
Power supply:	CC
At CC:	480mA
CRI:	>80
Color temperature:	3.000K
Weight:	46,48g

LED-MODUL 280X55 MM MAX. 480MA 4000K CRI>80 M. 2X 1POL. SMD KLEMME RÜCKSEITIG




Product number	1300-0280-0480-8401
Height	7.5mm
Width	55mm
Länge:	280mm
Screw-on:	Yes
Number of poles:	2
Channels:	1
Plug contact:	Yes
Board material:	FR4
Power supply:	CC
At CC:	480mA
CRI:	>80
beam angle:	120 degrees
Color temperature:	4.000K
Weight:	51g
Surface and color:	white
IP Schutzart:	IP20

LED-MODUL 280X55 MM MAX. 540MA 3000K CRI>80 M. 2X 1POL. SMD KLEMME RÜCKSEITIG




Product number	1300-0280-0540-8301
Height	7.2mm
Width	55mm
Länge:	280mm
Screw-on:	Yes
Number of poles:	2
Channels:	1
Plug contact:	Yes
Board material:	FR4
Power supply:	CC
At CC:	480mA
CRI:	>80
beam angle:	120 degrees
Color temperature:	3.000K
Weight:	51g
Surface and color:	white
IP Schutzart:	IP20

LED-MODUL 280X20 MM MAX. 540MA 4000K CRI>85 24X LED OSRAM DURIS E5 M. ADELS-KLEMME



Product number 1300-0280-0540-8400
 Width 20mm At CC: 540mA
 Länge: 280mm Color temperature:4.000K
 Screw-on: Yes
 Number of poles:2
 Plug contact: Yes
 Board material: FR4
 Power supply: CC
 CRI: >85

LED-MODUL 280X20 MM MAX. 640MA 4000K CRI>80



Product number 1300-0280-0640-8400
 Width 20mm At CC: 640mA
 Länge: 280mm Color temperature:4.000K
 Screw-on: Yes
 Number of poles:2
 Plug contact: Yes
 Board material: FR4
 Power supply: CC
 CRI: >80

LED-MODUL 318X23MM 17W 24V/DC CRI>90 2700K 4X1POL SMD KLEMME PASSEND F. BLACKLINE L OPTIK U. PROFIL



Product number 1300-0318-1724-9270
 Height 5.7mm Color temperature: 2.700K Surface and color:white
 Width 29mm Power supply: CV Material: Plastic
 Länge: 318mm Light output: 1235lm IP Schutzart: IP20
 Screw-on: Yes At CV: 24
 Channels: 1 beam angle: 120 degrees
 Plug contact: Yes Power consumption:17W
 Board material: FR4 CRI: >90
 Number of poles:4 Weight: 29g

LED-MODUL 318X23MM 17W 24V/DC CRI>90 3000K 4X1POL SMD KLEMME PASSEND F. BLACKLINE L OPTIK U. PROFIL



Product number 1300-0318-1724-9300
 Height 5.75mm Power supply: CV IP Schutzart: IP20
 Width 29mm Light output: 1235lm
 Länge: 318mm At CV: 24
 Screw-on: Yes Power consumption:17W
 Channels: 1 Color temperature: 3.000K
 Plug contact: Yes CRI: >90
 Board material: FR4 Weight: 29g
 Number of poles:4 Surface and color: white

LED-MODUL 318X23MM 17W 24V/DC CRI>90 4000K 4X1POL SMD KLEMME PASSEND F. BLACKLINE L OPTIK U. PROFIL




Product number	1300-0318-1724-9400	
Width	23mm	Color temperature:4.000K
Länge:	318mm	CRI: >90
Number of poles:	2	
Board material:	FR4	
Weight:	28g	
Power supply:	CV	
At CV:	24	
Power consumption:	17W	

LED-MODUL 560X24 MM MAX. 360MA 3.000K CRI>80



Product number	1300-0560-0360-8300	
Width	24mm	CRI: >80
Länge:	560mm	Color temperature:3.000K
Screw-on:	Yes	
Number of poles:	2	
Plug contact:	Yes	
Board material:	FR4	
Power supply:	CC	
At CC:	360mA	

LED-MODUL 560X24 MM MAX. 360MA 4.000K CRI>80



Product number	1300-0560-0360-8400	
Width	24mm	CRI: >80
Länge:	560mm	Color temperature:4.000K
Screw-on:	Yes	
Number of poles:	2	
Plug contact:	Yes	
Board material:	FR4	
Power supply:	CC	
At CC:	360mA	

LED-MODUL 560X24 MM MAX. 360MA 4.000K CRI>90



Product number	1300-0560-0360-9400	
Width	24mm	Color temperature:4.000K
Länge:	560mm	CRI: >90
Screw-on:	Yes	
Number of poles:	2	
Plug contact:	Yes	
Board material:	FR4	
Power supply:	CC	
At CC:	360mA	


LED-MODUL 280X20 MM MAX. 640MA 4000K CRI>80



Product number	1300-0560-0640-8400
Width	20mm
Länge:	280mm
Screw-on:	Yes
Number of poles:	2
Plug contact:	Yes
Board material:	FR4
Power supply:	CC
CRI:	>80

At CC:	640mA
Color temperature:	4.000K


LED-MODUL 3535LED'S 145X45 MM F. 1X 2X6 OPTIK @350MA 12,6W 36V 2050LM MAX.1500MA 5000K CRI>80 ALU PCB M. NTC SENSOR ZUR TEMPERATURKONTROLLE



Product number	1300-1145-1500-8500
Width	45mm
Länge:	145mm
Screw-on:	Yes
Plug contact:	Yes
Light output:	2050lm
Power supply:	CC
At CC:	350mA
CRI:	>80

Color temperature:	5.000K
Material:	Aluminium
Board material:	aluminium core
Surface and color:	white

LED-MODUL 140X30 MM 230V/AC 8W 3000K CRI>85 880LM M. KABEL 130 MM VERGOSSEN




Product number	1301-0140-0230-8300
Height	8mm
Width	30mm
Länge:	140mm
Cable length:	130mm
Number of poles:	2
Number of wires:	2
Cable conversion:	PVC
Cable end processing:	ferrule

CRI:	>85
Cable cross section:	0,75mm ²
beam angle:	120 degrees
Weight:	50g
Power supply:	AC - 230V
Color temperature:	3.000K
Material:	Aluminium
IP Schutzart:	IP44

Power consumption:	8W
Board material:	aluminium core
Light output:	800lm
Cable type:	twin strands
Surface and color:	white

LED-MODUL 200X130 MM 230V/AC 16W 3000K CRI>85 1600LM ALUPCB 42X LED SSC 5630HV VERGOSSEN WEISS

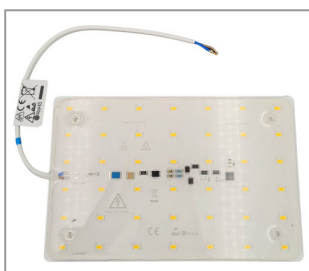

Product number	1301-0200-0230-8300
Width	200mm
Länge:	130mm
Screw-on:	Yes
Surface:	PUR-Polyurethan
CRI:	>85
Light output:	1600lm
Power supply:	AC - 230V
IP Schutzart:	IP68

Color temperature:	3.000K
Power consumption:	16W
Board material:	aluminium core


LED-MODUL 200X130 MM 230V/AC 8W 3000K CRI>85 880LM ALUPCB VERGOSSEN WEISS



Product number 1301-0200-0230-8301

Width	130mm	Color temperature:	3.000K
Länge:	200mm	Power consumption:	8W
Number of poles:	2	Surface and color:	white
Light output:	880lm		
Surface:	PUR-Polyurethan		
CRI:	>85		
Weight:	190g		
Power supply:	AC - 230V		


LED-MODUL 240X170 MM 230V/AC 16W 3000K CRI>85 1780LM ALUPCB WEISS

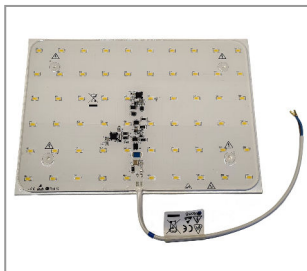

Product number 1301-0240-0230-8300

Width	170mm	Power consumption:	16W
Länge:	240mm	Light output:	1780lm
Number of poles:	2	Surface and color:	white
Surface:	PUR-Polyurethan		
CRI:	>85		
Power supply:	AC - 230V		
Weight:	229g		
Color temperature:	3.000K		


LED-MODUL 240X80 MM 230V/AC 16W 3000K CRI>85 1780LM ALUPCB WEISS

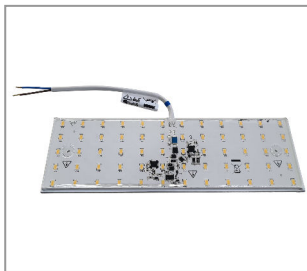

Product number 1301-0240-0230-8301

Width	80mm	Surface and color:	white
Länge:	240mm		
Number of poles:	2		
CRI:	>85		
Power supply:	AC - 230V		
Color temperature:	3.000K		
Power consumption:	16W		
Light output:	1780lm		


LED-MODUL 240X50 MM 230V/AC 16W 3000K CRI>85 1780LM ALUPCB VERGOSSEN WEISS L262 KABEL 60 MM LG. LED 2700K

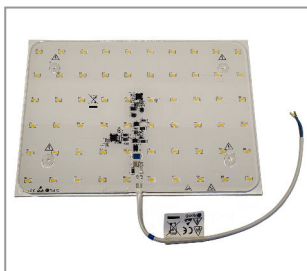

Product number 1301-0240-0230-8302

Height	6mm	Surface:	PUR-Polyurethan	Material:	Aluminium
Width	50mm	Cable end processing:	ferrule	IP Schutzart:	IP44
Länge:	240mm	CRI:	>85	Power consumption:	16W
Screw-on:	Yes	Cable length:	280mm	Board material:	aluminium core
Number of poles:	2	Cable cross section:	0,75mm ²	Light output:	1780lm
Channels:	1	beam angle:	120 degrees	Cable type:	twin strands
Number of wires:	2	Power supply:	AC - 230V	Surface and color:	white
Cable conversion:	PVC	Color temperature:	3.000K		


LED-MODUL 110X20 MM 24V/DC 10,87W 2700K CRI>90 1200LM M. ERNI-KLEMMEN U. PROXIDIMMER KONTROLL-LED AUS



Product number 1320-0110-0024-9270


Width	20mm	At CV:	24
Länge:	110mm	Power consumption:	11W
Screw-on:	Yes	CRI:	>90
Number of poles:	2		
Channels:	1		
Color temperature:	2.700K		
Power supply:	CV		
Light output:	1200lm		

LED-MODUL 200X7,5 MM TUNEABLE WHITE 24V/DC 4,6W 2200-3000K CRI>90 580LM (2X P066)



Product number 1320-0200-0024-2751

LED-MODUL 400X7,5 MM TUNEABLE WHITE 24V/DC 9,6W 2200-3000K CRI>90 1160LM INTEGRIERTES PROXIDIMMER MODUL




Product number 1320-0400-0024-2750

LED-MODUL 700X7,5 MM TUNEABLE WHITE 24V/DC 16,8W 2200-3000K CRI>90 2030LM INTEGRIERTES PROXIDIMMER MODUL




Product number 1320-0700-0024-2750

LED-MODUL 790X7,5 MM TUNEABLE WHITE 24V/DC 16,8W 2200-3000K CRI>90 2030LM INTEGRIERTES PROXIDIMMER MODUL



Product number **1320-0790-0024-2750**


LED-MODUL 900X7,5 MM TUNEABLE WHITE 24V/DC 21,6W 2200-3000K CRI>90 2610LM INTEGRIERTES PROXIDIMMER MODUL



Product number **1320-0900-0024-2750**


Width	75mm	Light output:	2610lm
Länge:	900mm	CRI:	>90
Screw-on:	Yes		
Channels:	2		
Color temperature:	2.700K		
Power supply:	CV		
Power consumption:	22W		
At CV:	24		

LED-MODUL 900X7,5 MM TUNEABLE WHITE 24V/DC 2200-3000K CRI>90 LM OHNE PROXIDIMMERMODUL(9X P066)



Product number **1320-0900-0024-2751**


LED-MODUL 1100X7,5 MM TUNEABLE WHITE 24V/DC 26,4W 2200-3000K CRI>90 3190LM INTEGRIERTES PROXIDIMMER MODUL (5X P066 + 1X P065 + 5X P066)



Product number **1320-1100-0024-2750**

Width	7.5mm	Light output:	3190lm
Länge:	1100mm	CRI:	>90
Board material:	FR4	IP Schutzart:	IP20
Control:	Yes		
Power supply:	CV		
Power consumption:	26W		
At CV:	24		
Color temperature:	2.200K		


LED-MODUL 1300X7,5 MM TUNEABLE WHITE 24V/DC 31,2W 2200-3000K CRI>90 3770LM INTEGRIERTES PROXIDIMMER MODUL (6X P066 + 1X P065 + 6X P066)



Product number 1320-1300-0024-2750

Width	75mm	Power consumption:	31W
Länge:	1300mm	CRI:	>90
Screw-on:	Yes		
Channels:	2		
Color temperature:	2.700K		
Power supply:	CV		
Light output:	3770lm		
At CV:	24		


LED-MODUL 1300X7,5 MM TUNEABLE WHITE 24V/DC 2200-3000K CRI>90 LM OHNE PROXIDIMMER MODUL (13X P066)



Product number 1320-1300-0024-2751

Product number 1320-1300-0024-2751


LED-MODUL 1500X7,5 MM TUNEABLE WHITE 24V/DC 36W 2200-3000K CRI>90 4350LM INTEGRIERTES PROXIDIMMER MODUL (7X P066 + 1X P065 + 7X P066)



Product number 1320-1500-0024-2750

Width	75mm	Power supply:	CV
Länge:	1500mm	At CV:	24
Screw-on:	Yes	Power consumption:	36W
Board material:	FR4	CRI:	>90
Control:	Yes		
Channels:	2		
Light output:	4350lm		
Color temperature:	2.700K		


LED-MODUL 55X38 MM 24V/DC 8,5W 3000K CRI>85 965LM M.TASTER

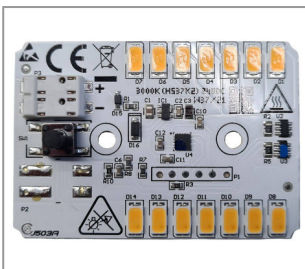

Product number 1360-0055-0024-8300

Height	5mm	Board material:	FR4	Color temperature:	3.000K
Width	38mm	Control:	Yes	Surface and color:	white
Länge:	55mm	Power consumption:	9W	IP Schutzart:	IP20
Screw-on:	Yes	Power supply:	CV		
Light output:	1170lm	CRI:	>85		
Number of poles:	2	Weight:	10g		
Channels:	1	At CV:	24		
Plug contact:	Yes	beam angle:	120 degrees		

LED-MODUL 127X60 MM TUNEABLE WHITE 24V/DC 14W 2700-5000K CRI>85 1400LM M. 2 TASTERN



Product number	1360-0127-0024-2750		
Width	60mm	Light output:	1400lm
Länge:	127mm	Weight:	44,11g
Number of poles:	3	Power consumption:	14W
Color temperature:	2.700K		
Surface:	PUR-Polyurethan		
Power supply:	CV		
CRI:	>85		
At CV:	24		

LED-MODUL Ø 10 MM MAX.1400MA 2700K CRI>80 1X LED OSLOM RACE M. KABEL SCHWARZ U. ROT 600 MM U.LINSE



Product number	1400-0010-1400-8270		
Height	7.8mm	Light output:	400lm
Number of poles:	2	Surface and color:	black
Channels:	1	Cable type:	single strand
Outer diameter:	10,0mm	CRI:	>80
Number of wires:	2	Cable conversion:	FEP
Cable end processing:	tinned	Cable cross section:	0,34mm²
Power supply:	CC	Weight:	5g
Color temperature:	2.700K	Power consumption:	3W
		Cable length:	600mm
		At CC:	1400mA
		beam angle:	35 degrees
		Board material:	aluminium core
		IP Schutzart:	IP20

LED-STERNPLATINE 19,82X20,98 MM MAX. 700MA 254LM 2700K CRI>80 1X LED SZ8-Y19-WW-C8-2/H



Product number	1400-0019-0700-8270		
Height	3mm	Color temperature:	2.700K
Width	19.82mm	Weight:	1,5g
Länge:	20,98mm	Power consumption:	25W
Number of poles:	2	CRI:	>80
Channels:	1	beam angle:	120 degrees
Solder pad:	Yes	Light output:	254lm
Outer diameter:	21,0mm	Material:	Aluminium
Power supply:	CC	Board material:	aluminium core
		At CC:	700mA
		Surface and color:	white

LED-STERNPLATINE 19,82X20,98 MM MAX. 1.800MA 2.700K CRI>90 INKL. WÄRMELEITPAD U. 2X KABEL SCHWARZ/ROT 1X0,5 750MM LG.



Product number	1400-0019-1800-9270		
Height	5mm	Cable end processing:	tinned
Width	19.8mm	Outer diameter:	21,0mm
Länge:	20,98mm	Power supply:	CC
Screw-on:	Yes	Color temperature:	2.700K
Number of poles:	2	Weight:	1,5g
Channels:	1	Cable type:	single strand
Cable length:	750mm	Cable conversion:	FEP
Number of wires:	2	beam angle:	120 degrees
		Light output:	500lm
		At CC:	1800mA
		Power consumption:	48W
		Material:	Aluminium
		Board material:	aluminium core
		CRI:	>90
		Cable cross section:	0,5mm²
		Surface and color:	white
		IP Schutzart:	IP20

LED-STERNPLATINE 19,82X20,98 MM MAX. 3000MA 3.000K CRI90 1X LED CREE XLAMP XP-L2 2 STEP SDCM




Product number	1400-0019-3000-9300		
Height	5mm	Weight:	5g
Screw-on:	Yes	At CC:	3000mA
Number of poles:	2	Color temperature:	3.000K
Channels:	1	Material:	Aluminium
Solder pad:	Yes	Board material:	aluminium core
Power supply:	CC	CRI:	>90
Outer diameter:	20,98mm	Surface and color:	white
beam angle:	120 degrees	IP Schutzart:	IP20

LED-MODUL 50X7 MM MAX. 700MA 2700K CRI>90




Product number	1400-0050-0700-9270		IP Schutzart:	IP20
Height	4mm	Color temperature:	2.700K	
Width	7mm	beam angle:	120 degrees	
Länge:	50mm	Weight:	5g	
Screw-on:	Yes	Light output:	700lm	
Number of poles:	2	Power consumption:	6W	
Channels:	1	Board material:	aluminium core	
Solder pad:	Yes	CRI:	>90	
Power supply:	CC	At CC:	700mA	

LED-STERNPLATINE 19,82X20,98 MM MAX. 700MA 254LM 2700K CRI>80 1X LED SZ8-Y19-WW-C8-2/H M.150MM KABEL SCHWARZ/ROT




Product number	1400-1019-0700-8270
-----------------------	----------------------------

LED-STERNPLATINE 20X21,20MM 3XOSLON GIANT 450LM @500MA 4,1W 3.000K CRI>90 FÜR CARCLOLINSE 10508



Product number	1400-2021-0450-9300
-----------------------	----------------------------

LED-RINGMODUL Ø63 MM MAX 160MA 36V @120MA 4,5W 600LM 3000K CRI>90 F. BLACKLINE CIRCLE




Product number **1500-0063-0160-9300**

LED-RINGMODUL Ø108 MM MAX 320MA 36V @2400MA 9W 1200LM 3000K CRI>90 F. BLACKLINE CIRCLE




Product number **1500-0108-0320-9300**

LED-MODUL Ø 138 MM 24V/DC 16,8W 2200-3500K CRI>93 1950LM PROXIDIMMER ON BOARD




Product number **1500-0138-0024-9223**

LED-RINGMODUL Ø153 MM MAX 480MA 36V @360MA 13,5W 1800LM 3000K CRI>90 F. BLACKLINE CIRCLE



Product number **1500-0153-0480-9300**


LED-RINGMODUL Ø198 MM MAX 640MA 36V @500MA 18W 2400LM 3000K CRI>90 F. BLACKLINE CIRCLE



Product number **1500-0198-0640-9300**

No image available

LED-RINGMODUL Ø235 MM 24V/DC 10,6W 3000K CRI>90 500MM KABEL VERGOSSEN



Product number **1501-0235-9524-9300**

No image available


LED-MODUL Ø 280 MM 24V/DC 16W 3000K CRI>85 1680LM ALUPCB M. SCHUTZLACK WEISS



Product number **1501-0280-0024-8301**

No image available


LED-MODUL Ø 280 MM 230V/AC 16W 3000K CRI>85 1680LM ALUPCB 126X LED SSC VERGOSSEN WEISS



Product number **1501-0280-0230-8300**


Height	8mm	Cable end processing:	ferrule	Power supply:	AC - 230V
Screw-on:	Yes	CRI:	>85	Color temperature:	3.000K
Number of poles:	2	Light output:	1600lm	Material:	Aluminium
Channels:	1	Cable length:	280mm	IP Schutzart:	IP44
Outer diameter:	280,0mm	Cable cross section:	0,75mm ²	Power consumption:	16W
Number of wires:	2	beam angle:	120 degrees	Board material:	aluminium core
Cable conversion:	PVC	Diameter inside:	200,0mm	Cable type:	twin strands
Surface:	PUR-Polyurethan	Weight:	300g	Surface and color:	white

LED-MODUL Ø 280 MM 230V/AC 16W 3000K CRI>85 1680LM ALUPCB 126X LED SSC M. SCHUTZLACK WEISS



Product number 1501-0280-0230-8301

LED-MODUL Ø 280 MM 230V/AC 16W 4000K CRI>85 1680LM ALUPCB 126X LED SSC VERGOSSEN WEISS



Product number	1501-0280-0230-8400		
Height	8mm	Surface:	PUR-Polyurethan Light output: 2200lm
Width	230mm	Cable end processing:	ferrule IP Schutzart: IP44
Länge:	230mm	Power consumption:	20W Color temperature: 4.000K
Screw-on:	Yes	CRI:	>85 Board material: aluminium core
Number of poles:	2	Cable length:	280mm Weight: 217g
Channels:	1	Cable cross section:	0,75mm ² Cable type: twin strands
Number of wires:	2	beam angle:	120 degrees
Cable conversion:	PVC	Power supply:	AC - 230V

LED-MODUL Ø 380 MM 24V/DC 30W 3000K CRI>85 3300LM ALUPCB VERGOSSEN WEISS




Product number	1501-0380-0024-8300		
Height	8mm	Surface:	PUR-Polyurethan Power consumption: 30W
Screw-on:	Yes	Power supply:	CV Color temperature: 3.000K
Outer diameter:	380,0mm	Cable end processing:	ferrule Weight: 374g
Number of poles:	2	CRI:	>85 Material: Aluminium
Channels:	1	At CV:	24 IP Schutzart: IP44
Number of wires:	2	Cable length:	280mm Board material: aluminium core
Light output:	3000lm	Cable cross section:	0,75mm ² Diameter inside: 300,0mm
Cable conversion:	PVC	beam angle:	120 degrees Cable type: twin strands
			Surface and color: white

LED-MODUL Ø 380 MM 24V/DC 30W 3000K CRI>85 3300LM ALUPCB SCHUTZLACK WEISS



Product number 1501-0380-0024-8301

LED-MODUL 480X200 MM 230V/AC 28,8W 3000K CRI>85 4480LM ALUPCB VERGOSSEN WEISS

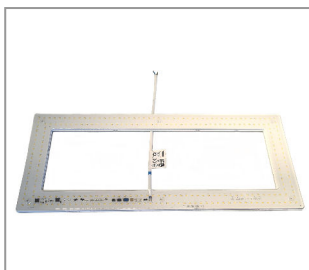


Product number

Height: 8mm
Width: 200mm
Länge: 480mm
Screw-on: Yes
Number of poles: 2
Channels: 1
Number of wires: 2
Light output: 3000lm

1501-0480-0230-8300

Cable conversion: PVC
Surface: PUR-Polyurethan
Cable end processing: ferrule
Cable length: 280mm
Cable cross section: 0,75mm²
beam angle: 120 degrees
Power supply: AC - 230V
Weight: 425g
Color temperature: 3.000K
Material: Aluminium
IP Schutzart: IP44
Board material: aluminium core
Cable type: twin strands
Surface and color: white

LED-RINGMODUL Ø 600X562 MM TUNEABLE WHITE 24V/DC ?W 2200-3000K CRI>90 ?LM INTEGRIERTES PROXDIMMER MODUL (10X P094 + 1X P095 + 11X P105) M. KABEL 600 MM




Product number

Height: 4mm
Screw-on: Yes
Number of poles: 2
Plug contact: Yes
Number of wires: 2
Control: Yes
Cable end processing: tinned
Channels: 2

1520-0600-0024-2750

Light output: 5200lm
Power supply: CV
CRI: >93
Cable type: single strand
At CV: 24
Cable conversion: FEP
Diameter inside: 562,0mm
beam angle: 120 degrees
Cable cross section: 0,34mm²
Color temperature: 2.200K
Weight: 250g
Cable length: 300mm
Power consumption: 52W
Material: Aluminium
Board material: aluminium core
Outer diameter: 600,0mm
Surface and color: white
IP Schutzart: IP20


LED-RINGMODUL Ø 600X562 MM TUNEABLE WHITE 24V/DC ?W 2200-3000K CRI>90 ?LM OHNE PROXDIMMER MODUL (10X P094 + 1X P095 + 11X P105) M. KABEL 600 MM



Product number

1520-0600-0024-2751

LED-MODUL 290 MM 8KT. 24V/DC 24,9W 3000K CRI>85 2105LM 64X LED OSRAM DURIS P5

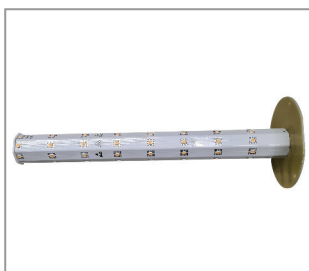

Product number

Height: 290mm
Screw-on: Yes
Channels: 1
Plug contact: Yes
Number of poles: 4
Control: Yes
beam angle: 360 degrees
Weight: 150g

1600-0290-0024-8301


Surface: Painted
Outer diameter: 80,0mm
Power supply: CV
CRI: >85
Power consumption: 25W
At CV: 24
Color temperature: 3.000K
Material: Aluminium
IP Schutzart: IP44
Board material: aluminium core
Light output: 3250lm
Surface and color: white

LED-MODUL 290 MM 12KT. 24V/DC 51,2W 3000K CRI>85 4139LM 96X LED OSRAM DURIS P5




Product number		1600-0290-0024-8302			
Height	290mm	Surface:	Painted	Material:	Aluminium
Width	85mm	Light output:	4200lm	Board material:	aluminium core
Länge:	85mm	Power supply:	CV	Surface and color:	white
Channels:	1	CRI:	>85	IP Schutzart:	IP20
Plug contact:	Yes	At CV:	24		
Number of poles:	4	Color temperature:	3.000K		
Control:	Yes	Weight:	267g		
beam angle:	360 degrees	Power consumption:	52W		

LED-MODUL 180X150 MM 230V/AC 16W 3000K CRI>85 1600LM ALUPCB 63X LED SSC VERGOSSEN M.KABEL 300 MM WEISS

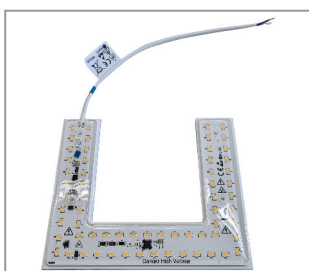

Product number		1601-0181-0230-8300			
Height	6mm	Surface:	PUR-Polyurethan	Material:	Aluminium
Width	150mm	Cable end processing:	ferrule	IP Schutzart:	IP44
Länge:	180mm	CRI:	>85	Power consumption:	16W
Screw-on:	Yes	Light output:	1600lm	Board material:	aluminium core
Number of poles:	2	Cable length:	280mm	Cable type:	twin strands
Channels:	1	beam angle:	120 degrees	Surface and color:	white
Number of wires:	2	Power supply:	AC - 230V		
Cable conversion:	PVC	Color temperature:	3.000K		

LED-MODUL 180X150 MM 230V/AC 16W 4000K CRI>85 1600LM ALUPCB 63X LED SSC VERGOSSEN M.KABEL 300 MM WEISS

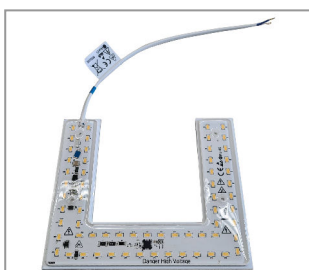


Product number		1601-0181-0230-8400			
Height	8mm	Surface:	PUR-Polyurethan	Material:	Aluminium
Width	150mm	Cable end processing:	ferrule	IP Schutzart:	IP44
Länge:	180mm	CRI:	>85	Color temperature:	4.000K
Screw-on:	Yes	Light output:	1600lm	Power consumption:	16W
Number of poles:	2	Cable length:	280mm	Board material:	aluminium core
Channels:	1	Cable cross section:	0,75mm ²	Weight:	210g
Number of wires:	2	beam angle:	120 degrees	Cable type:	twin strands
Cable conversion:	PVC	Power supply:	AC - 230V	Surface and color:	white

SPD



Product number	1601-0230-0230-1000
-----------------------	----------------------------

LED MODUL 146X30MM F. BLACKLINE XL Ø400 @100MA 3,6W 34V 500LM MAX. BESTROMUNG 160MA 3000K CRI>90 8 MODULE WERDEN FÜR EINEN GESCHLOSSENEN RING BENÖTIGT




Product number

1620-0146-0160-9300

Width 30mm
Länge: 146mm
Screw-on: Yes
Solder pad: Yes
At CC: 100mA
Power supply: CC
Light output: 500lm
Color temperature:3.000K

Material: Aluminium
Board material: aluminium core
CRI: >90
Surface and color:white

LED MODUL 148X30MM F. BLACKLINE XL Ø600 @100MA 3,6W 34V 500LM MAX. BESTROMUNG 160MA 3000K CRI>90 12 MODULE WERDEN FÜR EINEN GESCHLOSSENEN RING BENÖTIGT




Product number

1620-0148-0160-9300

Width 30mm
Länge: 148mm
Screw-on: Yes
Solder pad: Yes
Power supply: CC
Light output: 500lm
Color temperature:3.000K
At CC: 160mA

Material: Aluminium
Board material: aluminium core
CRI: >90
Surface and color:white

LED MODUL 175X30MM F. BLACKLINE XL Ø800 @100MA 3,6W 34V 500LM MAX. BESTROMUNG 160MA 3000K CRI>90 15 MODULE WERDEN FÜR EINEN GESCHLOSSENEN RING BENÖTIGT




Product number

1620-0175-0160-9300

Width 30mm
Länge: 175mm
Screw-on: Yes
Solder pad: Yes
At CC: 100mA
Power supply: CC
Light output: 500lm
Color temperature:3.000K

Material: Aluminium
Board material: aluminium core
CRI: >90
Surface and color:white

LED MODUL 182,5X27,5MM F. BLACKLINE XL Ø1500 @100MA 3,6W 34V 500LM MAX. BESTROMUNG 160MA 3000K CRI>90 24 MODULE WERDEN FÜR EINEN GESCHLOSSENEN RING BENÖTIGT




Product number

1620-0182-0160-9300

Width 27.5mm
Länge: 182,5mm
Screw-on: Yes
Solder pad: Yes
At CC: 100mA
Power supply: CC
Light output: 500lm
Color temperature:3.000K

Material: Aluminium
Board material: aluminium core
CRI: >90
Surface and color:white

LED MODUL 175X28MM F. BLACKLINE XL Ø1200 @100MA 3,6W 34V 500LM MAX. BESTROMUNG 160MA 3000K CRI>90 20 MODULE WERDEN FÜR EINEN GESCHLOSSENEN RING BENÖTIGT




Product number

1620-1175-0160-9300

Width: 28mm
Länge: 175mm
Screw-on: Yes
Solder pad: Yes
At CC: 100mA
Power supply: CC
Light output: 500lm
Color temperature: 3.000K

Material: Aluminium
Board material: aluminium core
CRI: >90
Surface and color: white

LED MODUL 175X25MM F. BLACKLINE XL Ø1800 @100MA 3,6W 34V 500LM MAX. BESTROMUNG 160MA 3000K CRI>90 30 MODULE WERDEN FÜR EINEN GESCHLOSSENEN RING BENÖTIGT



Product number

1620-2175-0160-9300

Width: 25mm
Länge: 175mm
Screw-on: Yes
Solder pad: Yes
At CC: 100mA
Light output: 500lm
Color temperature: 3.000K
Material: Aluminium

Board material: aluminium core
CRI: >90
Surface and color: white

LED-MODUL Ø100MM F. SPIEGEL M. LED KRANZ TASTDIMMER U. MIKRO USB 260LM 2700K U. 5000K CRI>90 F. BATTERIEBETRIEB



Product number


1665-0100-0005-9275

Height: 7.2mm
Screw-on: Yes
Number of poles: 2
Board material: FR4
Control: Yes
Plug: Yes
Channels: 2
Outer diameter: 100,0mm

Color temperature: 2.700K
Weight: 21g
Power supply: CV
beam angle: 180 degrees
Material: Aluminium
CRI: >90
Surface and color: white
At CV: 12

IP Schutzart: IP20

LED-MODUL 2.GEN Ø100MM F. SPIEGEL M. LED KRANZ TASTDIMMER U. MIKRO USB 260LM 2700K U. 5000K CRI>90 F. BATTERIEBETRIEB



Product number

1665-1100-0005-9275



LED COMPONENTS
LED STRIPES



LED-STRIP FLEXIBEL IP20 24V 4,8W/M 445LM/M 2700K RA>90 120 LEDS/M RÜCKSEITIG 3M TAPE ROLLE À 5 M



Product number

2120-2404-0445-9270

Height	1.3mm	Color temperature:	2.700K	CRI:	>90
Width	8mm	Power supply:	CV	Cable cross section:	0,5mm ²
Länge:	5000mm	Power consumption:	5W	Cable type:	twin strands
Number of poles:	2	At CV:	24	Surface and color:	white
Channels:	1	beam angle:	120 degrees	IP Schutzart:	IP20
Number of wires:	2	Light output:	445lm		
Cable end processing:	tinned	Cable length:	95mm		
Cable conversion:	PVC	Weight:	75g		

LED-STRIP FLEXIBEL IP20 24V 4,8W/M 445LM/M 3000K RA>90 120 LEDS/M RÜCKSEITIG 3M TAPE ROLLE À 5 M



Product number

2120-2404-0445-9300

Height	1.3mm	Power supply:	CV	CRI:	>90
Width	8mm	Power consumption:	5W	Cable cross section:	0,5mm ²
Länge:	5000mm	At CV:	24	Cable type:	twin strands
Number of poles:	2	beam angle:	120 degrees	Surface and color:	white
Channels:	1	Light output:	445lm	IP Schutzart:	IP20
Number of wires:	2	Cable length:	95mm		
Cable end processing:	tinned	Color temperature:	3.000K		
Cable conversion:	PVC	Weight:	75g		

LED-STRIP FLEXIBEL IP20 24V 4,8W/M 455LM/M 3000K RA>90 120 LEDS/M RÜCKSEITIG 3M TAPE B=8MM ROLLE À 5



Product number

2120-2404-0455-9300

Width	8mm	IP Schutzart:	IP20
Länge:	5000mm		
Power supply:	CV		
At CV:	24		
Light output:	455lm		
Power consumption:	4W		
Color temperature:	3.000K		
CRI:	>90		

LED-STRIP FLEXIBEL IP20 24V 9,6W/M 890LM/M 2700K RA>90 120 LEDS/M RÜCKSEITIG 3M TAPE ROLLE À 10 M



Product number

2120-2409-0890-9270

Width	8mm	IP Schutzart:	IP20
Länge:	10000mm		
Power consumption:	9W		
Color temperature:	2.700K		
Power supply:	CV		
Light output:	890lm		
At CV:	24		
CRI:	>90		

LED-STRIP FLEXIBEL IP20 24V 9,6W/M 915LM/M 3000K RA>90 120 LEDS/M B=8 MM



Product number

2120-2409-0915-9300

Height	1.3mm	Power consumption:	10W	Cable cross section:	0,5mm ²
Width	8mm	Light output:	915lm	Cable type:	twin strands
Länge:	5000mm	At CV:	24	Surface and color:	white
Number of poles:	2	beam angle:	120 degrees	IP Schutzart:	IP20
Number of wires:	2	Cable length:	95mm		
Cable end processing:	tinned	Color temperature:	3.000K		
Cable conversion:	PVC	Weight:	75g		
Power supply:	CV	CRI:	>90		

LED-STRIP FLEXIBEL IP20 24V 9,6W/M 940LM/M 4000K RA>90 120 LEDS/M B=8 MM



Product number

2120-2409-0915-9400

Width	8mm
Länge:	5000mm
Power consumption:	9W
Power supply:	CV
At CV:	24
Light output:	940lm
Color temperature:	4.000K
CRI:	>90

LED-STRIP FLEXIBEL IP20 24V 14,4W/M 1330LM/M 2.700K RA>90 180LEDS/M B=8 MM ROLLE À 5M



Product number

2120-2414-1330-9270

Width	8mm
Länge:	5000mm
Color temperature:	2.700K
Power supply:	CV
At CV:	24
CRI:	>90
Power consumption:	14W
Light output:	1330lm

LED-STRIP FLEXIBEL IP20 24V 14,4W/M 1365LM/M 3000K RA>90 180LEDS/M B=8 MM ROLLE À 5M



Product number

2120-2414-1365-9300

Height	1.3mm	At CV:	24	Cable cross section:	0,5mm ²
Width	8mm	Light output:	1365lm	Cable type:	twin strands
Länge:	5000mm	beam angle:	120 degrees	Surface and color:	white
Number of poles:	2	Cable length:	95mm	IP Schutzart:	IP20
Number of wires:	2	Power consumption:	15W		
Cable end processing:	tinned	Color temperature:	3.000K		
Cable conversion:	PVC	Weight:	75g		
Power supply:	CV	CRI:	>90		

LED-STRIP FLEXIBEL IP20 24V 14,4W/M 1400LM/M 4.000K RA>90 180LEDS/M B=8 MM ROLLE À 5M



Product number

2120-2414-1400-9400

Height	1.3mm	Power supply:	CV	Power consumption:	14W
Width	8mm	At CV:	24	Cable cross section:	0,5mm ²
Länge:	5000mm	beam angle:	120 degrees	Cable type:	twin strands
Number of poles:	2	Cable length:	95mm	Surface and color:	white
Channels:	1	Weight:	75g	IP Schutzart:	IP20
Number of wires:	2	Light output:	1400lm		
Cable end processing:	tinned	Color temperature:	4.000K		
Cable conversion:	PVC	CRI:	>90		

LED-STRIP FLEXIBEL IP20 24V 19,2W/M 1815LM/M 2700K RA>90 240 LEDS B=8MM ROLLE À 5 M



Product number

2120-2419-1815-9270

LED-STRIP FLEXIBEL IP20 24V 19,2W/M 1815LM/M 3000K RA>90 240 LEDS B=8MM ROLLE À 5 M




Product number

2120-2419-1815-9300

Height	1.3mm	Power supply:	CV	Light output:	1815lm
Width	8mm	At CV:	24	Cable cross section:	0,5mm ²
Länge:	5000mm	beam angle:	120 degrees	Cable type:	twin strands
Number of poles:	2	Cable length:	95mm	Surface and color:	white
Channels:	1	Power consumption:	19W	IP Schutzart:	IP20
Number of wires:	2	Color temperature:	3.000K		
Cable end processing:	tinned	Weight:	75g		
Cable conversion:	PVC	CRI:	>90		

LED-STRIP FLEXIBEL IP20 24V 19,2W/M 1860LM/M 4000K RA>90 240 LEDS B=8MM ROLLE À 5 M



Product number

2120-2419-1815-9400

LED-STRIP FLEXIBEL IP20 24V 24W/M 2265LM/M 3.000K RA>90 300LEDS/M RÜCKSEITIG 3M TAPE ROLLE À 5 M



Product number

2120-2424-2265-9300

Height	1.3mm	Cable conversion:	PVC	CRI:	>90
Width	8mm	Power supply:	CV	Cable cross section:	0,5mm ²
Länge:	5000mm	At CV:	24	Cable type:	twin strands
Number of poles:	2	beam angle:	120 degrees	Surface and color:	white
Channels:	1	Cable length:	95mm	IP Schutzart:	IP20
Light output:	2265lm	Color temperature:	3.000K		
Number of wires:	2	Weight:	75g		
Cable end processing:	tinned	Power consumption:	24W		

LED-STRIP FLEXIBEL IP20 24V 24W/M 2320LM/M 4.000K RA>90 300LEDS/M RÜCKSEITIG 3M TAPE ROLLE À 5 M



Product number

2120-2424-2320-9400

Width	10mm	IP Schutzart:	IP20
Länge:	5000mm		
Light output:	2320lm		
Power supply:	CV		
At CV:	24		
Color temperature:	4.000K		
CRI:	>90		
Surface and color:	white		

LED-STRIP FLEXIBEL IP20 24V 32W/M 3180LM/M 3000K RA>90 420LEDS/M B=8 MM 5M/ROLLE




Product number

2120-2432-3180-9300

Height	1.3mm	Power supply:	CV	CRI:	>90
Width	8mm	At CV:	24	Cable cross section:	0,5mm ²
Länge:	5000mm	beam angle:	120 degrees	Cable type:	twin strands
Number of poles:	2	Power consumption:	32W	Surface and color:	white
Channels:	1	Cable length:	95mm	IP Schutzart:	IP20
Number of wires:	2	Light output:	3180lm		
Cable end processing:	tinned	Color temperature:	3.000K		
Cable conversion:	PVC	Weight:	75g		

LED-STRIP FLEXIBEL IP20 24V 32W/M 3180LM/M 4000K RA>90 420LEDS/M B=8 MM 5M/ROLLE



Product number

2120-2432-3180-9400


LED-STRIP FLEXIBEL IP20 24V 32W/M 3260LM/M 4000K RA>90 420LEDS/M B=8 MM 5M/ROLLE



Product number 2120-2432-3260-9400

Width	8mm	IP Schutzart:	IP20
Länge:	5000mm		
Power supply:	CV		
At CV:	24		
Power consumption:	32W		
Color temperature:	4.000K		
Light output:	3260lm		
CRI:	>90		

LED-STRIP VERDREHBAR IP20 24V 7,2W/M 540LM/M 2700K RA>90 60 LEDS/M RÜCKSEITIG 3M TAPE ROLLE À 5 M 100MM TEILBAR



Product number 2121-2407-0540-9270

LED-STRIP FLEXIBEL IP44 24V 9,6W/M 1000LM/M 3500K RA>90 140 LEDS/M B=10,5 MM



Product number 2144-2409-1000-9350

Height	1.5mm	Cable conversion:	PVC	Light output:	1000lm
Width	10.5mm	Surface:	PUR-Polyurethan	IP Schutzart:	IP44
Länge:	5000mm	Power supply:	CV	CRI:	>90
Number of poles:	2	Power consumption:	10W	Cable cross section:	0,5mm ²
Channels:	1	At CV:	24	Cable type:	twin strands
Number of wires:	2	beam angle:	120 degrees	Surface and color:	white
Cable end processing:	tinned	Cable length:	95mm		
Color temperature:	3.500K	Weight:	85g		

LED-STRIP FLEXIBEL IP65 24V 19,2W/M 1200LM/M 2700K RA>85 B=10,5MM 5M/ROLLE



Product number 2165-2419-1200-8270

LED-STRIP FLEXIBEL IP65 24V 19,2W/M 1200LM/M 3000K RA>85 B=10,5MM 5M/ROLLE



Product number

2165-2419-1200-8300

Height	1.4mm	Surface:	PUR-Polyurethan	Color temperature:	3.000K
Width	10.5mm	Power supply:	CV	Weight:	85g
Länge:	5000mm	CRI:	>85	IP Schutzart:	IP64
Number of poles:	2	Light output:	1200lm	Cable cross section:	0,5mm ²
Channels:	1	At CV:	24	Cable type:	twin strands
Number of wires:	2	beam angle:	120 degrees	Surface and color:	white
Cable end processing:	tinned	Cable length:	95mm		
Cable conversion:	PVC	Power consumption:	19W		

LED-STRIP FLEXIBEL IP65 24V 9,6W/M 790LM/M 2700K RA>85 B=8,5MM 5M/ROLLE





Product number

2165-2496-0790-8270


Width	8.5mm	IP Schutzart:	IP64
Länge:	5000mm		
Power consumption:	9W		
Color temperature:	2.700K		
Light output:	790lm		
Power supply:	CV		
CRI:	>85		
At CV:	24		



LED COMPONENTS
LED DIMMERS

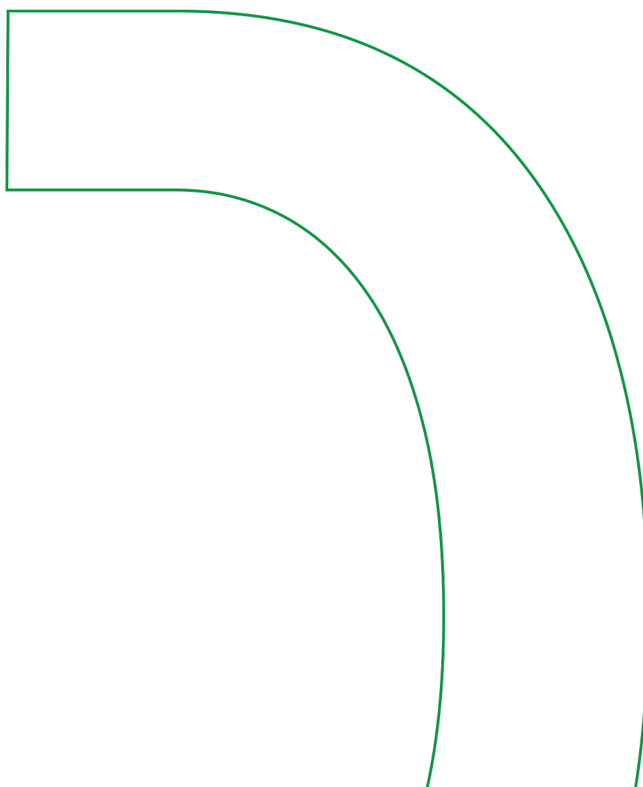


PROXIDIMMER 35X10 MM 5-26V/DC 1X 2A 1X LED 2700K

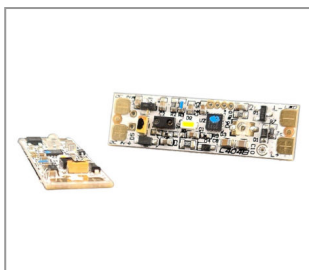


Product number	3300-0526-0102-1127	
Height	4mm	Color temperature: 2.700K
Width	10mm	Power supply: CV
Länge:	35mm	At CV: 24
Channels:	1	beam angle: 120 degrees
Solder pad:	Yes	Power consumption:48W
Board material:	FR4	CRI: >90
Number of poles:	4	Weight: 1g
Control:	Yes	IP Schutzart: IP20

PROXIDIMMER 35X10 MM 5-26V/DC 1X 2A 1X LED 2700K PM

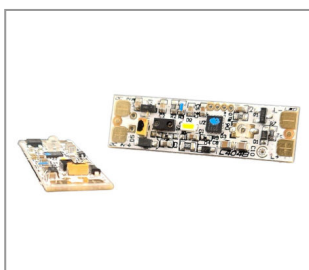


Product number	3300-0526-0102-1227	
Height	4mm	Color temperature: 2.700K
Width	10mm	Power supply: CV
Länge:	35mm	At CV: 24
Channels:	1	beam angle: 120 degrees
Solder pad:	Yes	Power consumption:48W
Board material:	FR4	CRI: >90
Number of poles:	4	Weight: 1g
Control:	Yes	Surface and color: white
		IP Schutzart: IP20

PROXIDIMMER 35X10 MM 5-26V/DC 1X 2A BLAU LED M. MEMORY

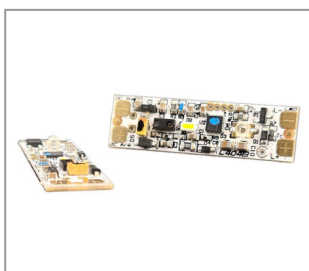


Product number	3300-0526-0102-2109	
Height	4mm	Power supply: CV
Width	10mm	CRI: >85
Länge:	35mm	At CV: 24
Channels:	1	beam angle: 120 degrees
Solder pad:	Yes	Color temperature: B
Board material:	FR4	Power consumption:48W
Number of poles:	4	Weight: 1g
Control:	Yes	Surface and color: white
		IP Schutzart: IP20

PROXIDIMMER NEO 35X10 MM 5-26V/DC 1X 3A 1X LED 2700K

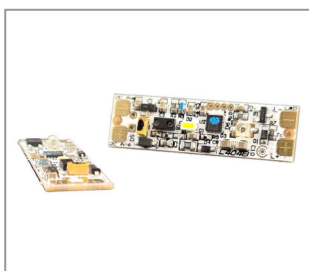


Product number	3300-0526-0103-0127	
Height	4mm	Power consumption:72W
Width	10mm	Color temperature: 2.700K
Länge:	35mm	Power supply: CV
Channels:	1	At CV: 24
Solder pad:	Yes	beam angle: 120 degrees
Board material:	FR4	CRI: >90
Number of poles:	4	Weight: 1g
Control:	Yes	Surface and color: white
		IP Schutzart: IP20

PROXIDIMMER NEO 35X10 MM 5-26V/DC 1X 3A 1X LED 2700K HOCHFREQUENZ

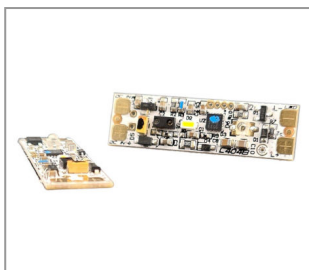


Product number	3300-0526-0103-0227		
Height	4mm	Power consumption:72W	IP Schutzart: IP20
Width	10mm	Color temperature: 2.700K	
Länge:	35mm	Power supply: CV	
Channels:	1	At CV: 24	
Solder pad:	Yes	beam angle: 120 degrees	
Board material:	FR4	CRI: >90	
Number of poles:	4	Weight: 1g	
Control:	Yes	Surface and color: white	

PROXIDIMMER 40X10 MM 5-26V/DC 10A 1X LED 2700K

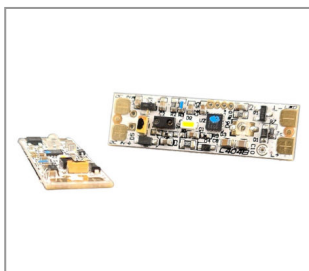


Product number	3300-0526-0110-1127		
Height	4mm	Color temperature: 2.700K	IP Schutzart: IP20
Width	10mm	Power supply: CV	
Länge:	40mm	At CV: 24	
Channels:	1	beam angle: 120 degrees	
Solder pad:	Yes	CRI: >90	
Board material:	FR4	Weight: 1g	
Number of poles:	4	Power consumption:240W	
Control:	Yes	Surface and color: white	

**PROXIDIMMER NEO 40X10 MM TUNEABLE WHITE 5-26V/DC 2X 3A 1X LED 2700K STANDARD PWM
MIDNIGHT DIE KONTROLL-LED DARF NUR LEUCHTEN WENN GEDIMMT WIRD**

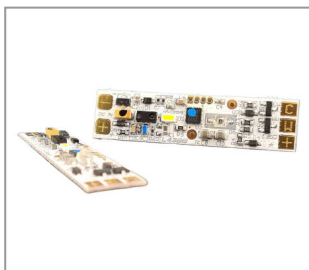


Product number	3300-0526-0203-0027		
Height	4mm	Color temperature: 2.700K	IP Schutzart: IP20
Width	10mm	Power supply: CV	
Länge:	40mm	At CV: 24	
Solder pad:	Yes	beam angle: 120 degrees	
Number of poles:	5	Power consumption:144W	
Board material:	FR4	CRI: >90	
Control:	Yes	Weight: 1g	
Channels:	2	Surface and color: white	

**PROXIDIMMER NEO 40X10 MM TUNEABLE WHITE 5-26V/DC 2X 3A 1X LED 2700K DW FAST PWM MIDNIGHT
DIE KONTROLL-LED DARF NUR LEUCHTEN WENN GEDIMMT WIRD**

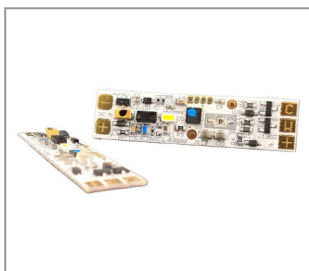


Product number	3300-0526-0203-0127		
Height	4mm	Color temperature: 2.700K	IP Schutzart: IP20
Width	10mm	Power supply: CV	
Länge:	40mm	At CV: 24	
Solder pad:	Yes	beam angle: 120 degrees	
Number of poles:	5	Power consumption:144W	
Board material:	FR4	CRI: >90	
Control:	Yes	Weight: 1g	
Channels:	2	Surface and color: white	

PROXIDIMMER 40X10 MM TUNEABLE WHITE 5-26V/DC 2X 6A 1X LED 2700K

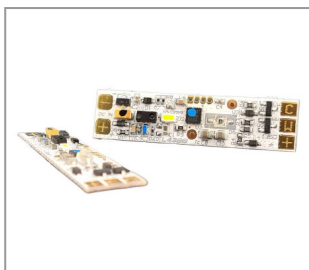


Product number	3300-0526-0206-0327	
Height	4mm	Color temperature: 2.700K
Width	10mm	Power consumption:288W
Länge:	40mm	Power supply: CV
Solder pad:	Yes	At CV: 24
Number of poles:	5	beam angle: 120 degrees
Board material:	FR4	Weight: 1,2g
Control:	Yes	CRI: >90
Channels:	2	IP Schutzart: IP20

PROXIDIMMER MIDNIGHT REMOTE MAIN BOARD – 57,3X18X4,1 MM SENSOR – 18X12X2 MM TUNEABLE 5-26V/DC 4 X 2A 96W WI-FI - 2,4 GHZ B/G/N

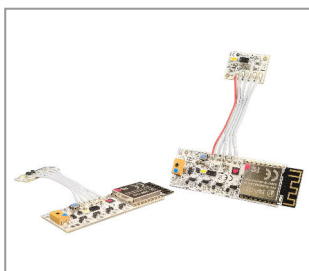

Product number	3306-0526-0403-0027		IP Schutzart: IP20
Height	4.1mm	Color temperature: 2.700K	
Width	18mm	Power supply: CV	
Länge:	57,3mm	At CV: 24	
Solder pad:	Yes	beam angle: 120 degrees	
Number of poles:	5	Power consumption:144W	
Board material:	FR4	Weight: 4,8g	
Control:	Yes	CRI: >90	
Channels:	2	Surface and color: white	


TASTDIMMER MIDNIGHT REMOTE MAIN BOARD – 57,3X18X4,1 MM SENSOR – 18X12X2 MM TUNEABLE 5-26V/DC 4 X 2A 96W WI-FI - 2,4 GHZ B/G/N



Product number	3306-0526-0403-1027
-----------------------	----------------------------

No image available

PROXIDIMMER 35X10MM 5-26V/DC 1X 3A 1X LED 2700K F. ROLLI

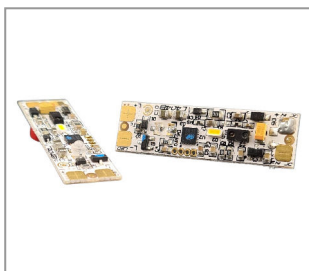

Product number	3310-0526-0103-0127		IP Schutzart: IP20
Height	8.25mm	Weight: 1,3g	
Width	10mm	Power consumption:72W	
Länge:	35mm	Color temperature: 2.700K	
Channels:	1	Power supply: CV	
Solder pad:	Yes	At CV: 24	
Board material:	FR4	beam angle: 120 degrees	
Number of poles:	4	CRI: >90	
Control:	Yes	Surface and color: white	

PROXIDIMMER 40X10MM 5-26V/DC 1X 3A 1X LED 2700K M. TANTAL F. ROLLI STANDARD



Product number


Height 5mm
Width 10mm
Länge: 40mm
Channels: 1
Solder pad: Yes
Board material: FR4
Number of poles:4
Control: Yes

3320-0526-0103-0127

Weight: 1,3g
Power consumption:72W
Color temperature: 2.700K
Power supply: CV
At CV: 24
beam angle: 120 degrees
CRI: >90
Surface and color: white

IP Schutzart: IP20


**TAST DIMMER 25X35 MM 12-24V/DC 1X 4A/96W PWM EXTERNER TASTER 3X 2 STECKKONTAKTE
ELEKTRONIK VERGOSSEN PROGRAMMIERUNG SCHNELL**



Product number 3203-0526-0104-0100


Height	5mm	Power supply:	CV
Width	25mm	At CV:	24
Länge:	35mm	Power consumption:	96W
Channels:	1	Number of poles:	6
Plug contact:	Yes	Weight:	7g
Board material:	FR4	IP Schutzart:	IP44
Control:	Yes	Surface and color:	white
Surface:	PUR-Polyurethan	Material:	Plastic

**TAST DIMMER 25X35 MM 12-24V/DC 1X 4A/96W PWM EXTERNER TASTER FLICKER FREE 3X 2
STECKKONTAKTE ELEKTRONIK VERGOSSEN PROGRAMMIERUNG SCHNELL**



Product number 3203-0526-0104-0101


DOPPELTAST-DIMMER 70X18 MM 08-27V/DC 4X2,5A M. 6X2 POL SMD KLEMME



Product number 3220-0827-0425-0000


Height	6.5mm	Channels:	4
Width	18.3mm	Power supply:	CV
Länge:	70mm	At CV:	24
Screw-on:	Yes	Number of poles:	12
Plug contact:	Yes	Power consumption:	240W
Board material:	FR4	Surface and color:	white
Control:	Yes	IP Schutzart:	IP20
Weight:	7,4g		

M-TOUCH DIMMER 40X10 MM 5-26V/DC 1X 3A 1X LED 2700K

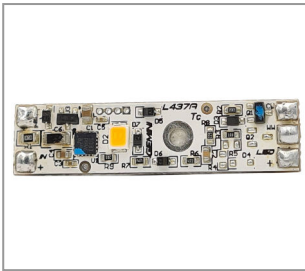

Product number	3100-0526-0103-0027	
Height	3mm	Diameter inside: 2,45mm
Width	10mm	IP Schutzart: IP20
Länge:	40mm	
Screw-on:	Yes	
Channels:	1	
Board material:	FR4	
Control:	Yes	
Weight:	1,62g	


LED-STECKERNETZGERÄT M. SCHRAUBKLEMMEN 80,8 X 66,4 X 23,9 MM 220-240V/AC 24V/DC 17W IP20 SCHWARZ




Product number	4501-0024-0017-2023
-----------------------	----------------------------



LED COMPONENTS
LED CONTROL

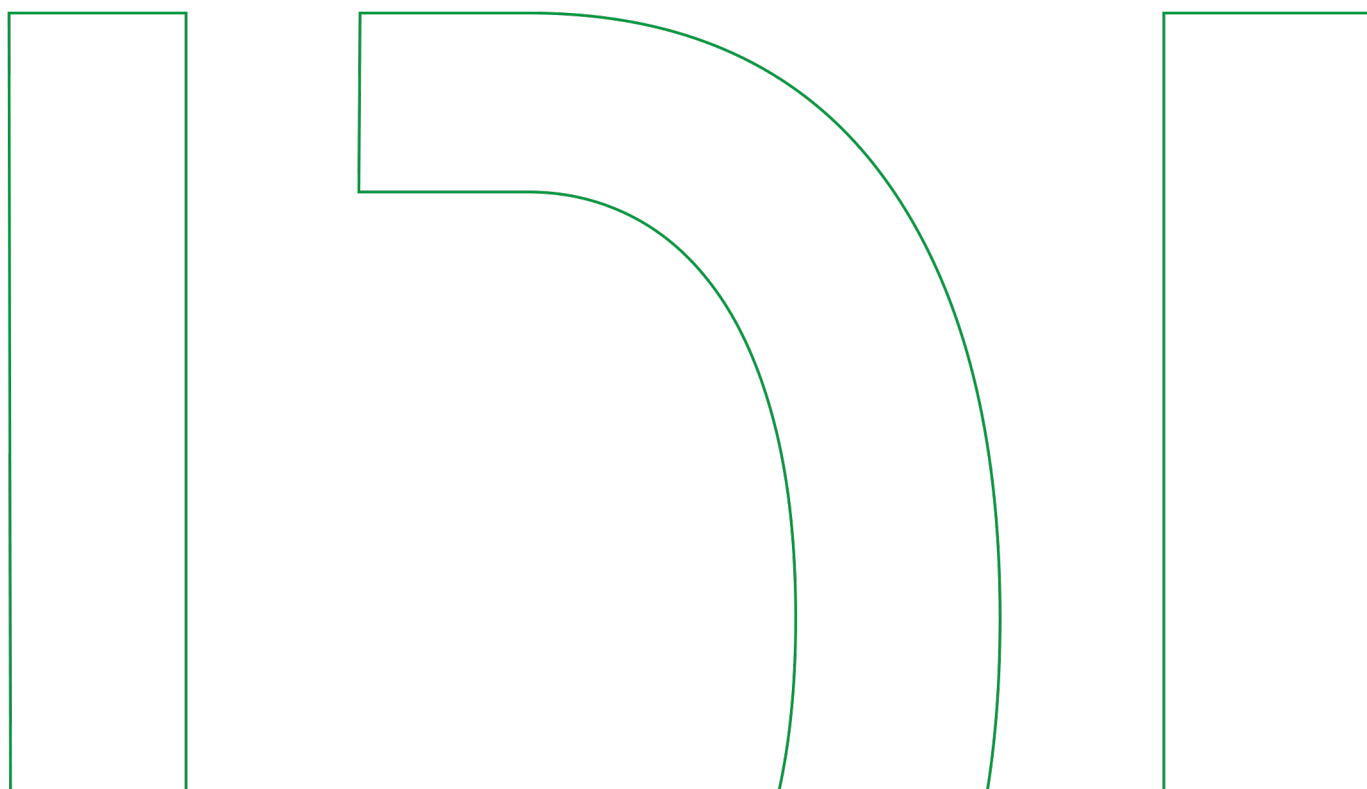


SPRACHSTEUERUNG SIM KARTE ALEXA 39,19X16X3,6 MM F. EINSCHUB IN LED MODUL ODER SIM KARTEN HALTER

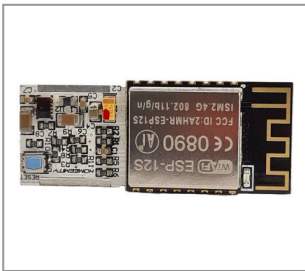


Product number	2900-1226-0400-0001
Height	3.6mm
Width	19mm
Länge:	39,2mm
Plug contact:	Yes
Board material:	FR4
Control:	Yes
Channels:	2
Power supply:	CV
Surface and color:	green
At CV:	24
Number of poles:	6
Weight:	10,5g
Sim holder:	Yes
Material:	Plastic
IP Schutzart:	IP20

OFFLINE TW SPRACHCONTROLLER 70X27,5X15,5 MM 2X18 AMPER 11-27V DC INKL. MIKROFON

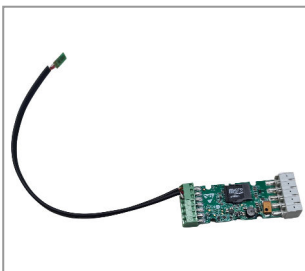


Product number	2902-7027-0218-0000
Height	15.5mm
Width	27.5mm
Länge:	70mm
Screw-on:	Yes
Screw contact:	Yes
Number of poles:	5
Board material:	FR4
Control:	Yes
Channels:	2
Power supply:	CV
Surface and color:	green
Power consumption:	480W
At CV:	24
Weight:	17g
IP Schutzart:	IP20

STEUERUNG FÜR CASAMBI 74,5X27,3X15,5MM 11-27VDC 2 KANAL GERÄT 2X2 INPUT 2X2 OUTPUT MAX. 10A PRO KANAL 480W GESAMTLEISTUNG IP20 OHNE CBM



Product number	2920-1127-0480-0020
-----------------------	----------------------------

SIM KARTEN HALTER 51,6X32,4X10,7MM 12-26V 4X2,5A F. ALEXA UND BLUETOOTH SIM KARTEN

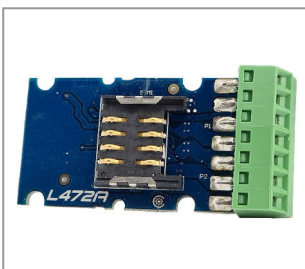

Product number	3002-1226-0425-0000
Height	10mm
Width	24.6mm
Länge:	50mm
Screw-on:	Yes
Screw contact:	Yes
Plug contact:	Yes
Board material:	FR4
Number of poles:	7
Control:	Yes
Channels:	5
Sim holder:	Yes
Weight:	7,85g
Material:	Plastic
IP Schutzart:	IP20



LED COMPONENTS
LED DRIVERS



LED-VORSCHALTGERÄT 166X40X14 MM 198-264V/AC 24V/DC 20W IP20



Product number	4400-0024-1020-0020	
Height	14mm	Weight: 100g
Width	40mm	At CV: 24
Länge:	166mm	Power supply: AC - 230V
Screw contact:	Yes	Surface and color:white
Channels:	1	IP Schutzart: IP20
Number of poles:	4	
Material:	PVC	
Power consumption:	20W	

LED-VORSCHALTGERÄT 137X50X15,5 MM 176-264V/AC 24V/DC 24W IP20



Product number	4400-0024-1024-0020	
Height	15.5mm	Power consumption:24W
Width	50mm	Surface and color: white
Länge:	137mm	Material: Plastic
Channels:	1	IP Schutzart: IP20
Plug contact:	Yes	
Number of poles:	4	
Power supply:	CV	
At CV:	24	

LED-VORSCHALTGERÄT 170X57X18 MM 176-264V/AC 24V/DC 36W IP20




Product number	4400-0024-1036-0020	
Height	18mm	At CV: 24
Width	57mm	Power consumption:36W
Länge:	170mm	Surface and color: white
Channels:	1	Material: Plastic
Plug contact:	Yes	IP Schutzart: IP20
Number of poles:	4	
Weight:	163g	
Power supply:	CV	

LED-VORSCHALTGERÄT 185X64X22 MM 200-240V/AC 24V/DC 60W IP20



Product number	4400-0024-1060-0020	
Height	18mm	At CV: 24
Width	57mm	Power supply: AC - 230V
Länge:	170mm	Surface and color:white
Channels:	1	Material: Plastic
Plug contact:	Yes	IP Schutzart: IP20
Power consumption:	60W	
Number of poles:	4	
Weight:	150g	

LED-VORSCHALTGERÄT 400X40X22 MM 220-240V/AC 24V/DC 250W IP20



Product number 4400-0024-1250-0020


LED-VORSCHALTGERÄT 148X40X32 MM 90-305V/AC 36VDC O. 700MA 25,2 W DIMMBAR 1,10V WIDERSTAND U. TRIAC IP67



Product number 4400-0036-1025-1367

Height	32mm	Material:	PVC	IP Schutzart:	IP66
Width	40mm	Cable type:	single strand	Surface and color:	natural color
Länge:	148mm	Power consumption:	25W		
Channels:	1	Cable cross section:	0,75mm ²		
Cable end processing:	tinned	Number of poles:	6		
Weight:	150g	Power supply:	AC - 230V		
At CV:	36	Cable length:	300mm		
Cable conversion:	PVC	At CC:	700mA		

LED-VORSCHALTGERÄT 49X27X20 MM 180-264V/AC 350MA 7W 2,7-19,2V IP20

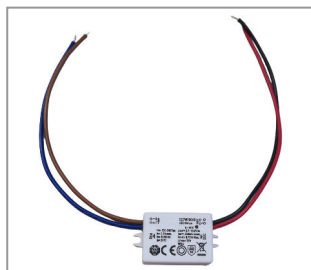

Product number 4400-0350-1007-0020

Height	20mm	Cable conversion:	PVC	Power supply:	AC - 230V
Width	27mm	Material:	PVC	Weight:	40g
Länge:	49mm	At CC:	350mA	Surface and color:	white
Screw-on:	Yes	Cable type:	single strand	IP Schutzart:	IP20
Channels:	1	Cable length:	150mm		
Number of poles:	4	At CV:	24		
Number of wires:	4	Cable cross section:	0,75mm ²		
Cable end processing:	tinned	Power consumption:	7W		


LED-VORSCHALTGERÄT TRIAC DIMMBAR 58X36X23 MM 198-264V/AC 350MA15W 27-42V IP44



Product number 4400-0350-1015-1044

Height	23mm	Cable conversion:	PVC	Power supply:	AC - 230V
Width	36mm	Material:	PVC	IP Schutzart:	IP44
Länge:	58mm	At CC:	350mA	Surface and color:	white
Screw-on:	Yes	Cable type:	single strand		
Channels:	1	Cable length:	150mm		
Number of poles:	4	Cable cross section:	0,75mm ²		
Number of wires:	4	Power consumption:	15W		
Cable end processing:	tinned	Weight:	60g		

LED-VORSCHALTGERÄT 108X52X22 MM 198-264V/AC 350MA 25-51V 18W TRIAC DIMMBAR IP20



Product number **4400-0350-1021-1120**

LED-VORSCHALTGERÄT 137X42.5X29.5MM 24.5-37W 350MA 70-105V TRIAC DIMMBAR IP20



Product number **4400-0350-1037-1120**

LED-VORSCHALTGERÄT 108X52X22 MM 198-264V/AC 500MA 16-42V 21W TRIAC U. TASTER DIMMBAR IP20



Product number **4400-0500-1021-1120**

Height	22mm	Material:	PVC
Width	52mm	Power supply:	AC - 230V
Länge:	108mm	Power consumption:	21W
Screw-on:	Yes	At CC:	500mA
Screw contact:	Yes	Surface and color:	white
Channels:	1	IP Schutzart:	IP20
Number of poles:	4		
Weight:	108g		


LED-VORSCHALTGERÄT 112X46X15 MM 176-264V/AC 24V/DC 12W IP20



Product number **4400-1024-1012-0020**

Height	15mm	Weight:	61,3g
Width	46mm	Power consumption:	12W
Länge:	112mm	Surface and color:	white
Channels:	1	Material:	Plastic
Plug contact:	Yes	IP Schutzart:	IP20
Number of poles:	4		
Power supply:	CV		
At CV:	24		

LED-VORSCHALTGERÄT 137X42,5X29,5 MM 200-240 V/AC SEK. 1050MA 30-40V 42W TRIAC DIMMBAR IP20



Product number	4400-1050-1042-1020
Height	29.5mm
Width	42.5mm
Länge:	137mm
Screw-on:	Yes
Plug contact:	Yes
Number of poles:	4
Weight:	128g
Material:	PVC
At CC:	1050mA
Power supply:	AC - 230V
Power consumption:	42W
Surface and color:	white
IP Schutzart:	IP20

LED-VORSCHALTGERÄT SLIM 300X30X16 MM 176-264V/AC 24V/DC 60W IP20




Product number	4401-0024-0060-0020
Height	16mm
Width	30mm
Länge:	300mm
Screw-on:	Yes
Channels:	1
Plug contact:	Yes
Power consumption:	60W
Number of poles:	4
At CV:	24
IP Schutzart:	IP20

LED-VORSCHALTGERÄT SLIM 241X30X21 MM 176-264V/AC 24V/DC 60W IP20



Product number	4401-0024-0060-1020
Height	21mm
Width	30mm
Länge:	241mm
Screw-on:	Yes
Screw contact:	Yes
Channels:	1
Power consumption:	60W
Number of poles:	4
Weight:	150g
Material:	PVC
At CV:	24
Power supply:	AC - 230V
Surface and color:	white
IP Schutzart:	IP20

LED-VORSCHALTGERÄT SLIM 360X40X21 MM 176-264V/AC 24V/DC 150W IP20



Product number	4401-0024-0150-1020
-----------------------	----------------------------


LED-VORSCHALTGERÄT Ø50X24 MM 100-240V/AC 24V/DC 12W PRIMÄR U. SEKUNDÄR M. KABEL 150MMLG. IP65



Product number 4409-0024-1012-0065

Height	24mm	Power consumption:	12W
Screw-on:	Yes	Surface and color:	white
Channels:	1	Material:	Plastic
Number of poles:	4		
Outer diameter:	50,0mm		
At CV:	24		
IP Schutzart:	IP67		
Weight:	91g		

LED-VORSCHALTGERÄT 280X30X21 MM 220-240V/AC 200-350MA EINSTELLBAR Ü. DIP SWITCH 54-80W 30-270V IP20



Product number 4410-0350-1080-0020

Height	21mm	At CC:	350mA
Width	30mm	Number of poles:	6
Länge:	280mm	Power consumption:	80W
Screw-on:	Yes	Power supply:	AC - 230V
Weight:	142g	Surface and color:	white
Channels:	1	IP Schutzart:	IP20
Plug contact:	Yes		
Material:	PVC		


LED-VORSCHALTGERÄT 360X30X21 MM 198-264V/AC 140-350 MA EINSTELLB. Ü. DIP SWITCH 35-80W DALI 30-250V IP20



Product number 4410-0350-1080-2120


Height	21mm	At CC:	350mA
Width	30mm	Weight:	213g
Länge:	360mm	Power consumption:	80W
Screw-on:	Yes	Power supply:	AC - 230V
Number of poles:	8	Surface and color:	white
Plug contact:	Yes	IP Schutzart:	IP20
Channels:	2		
Material:	PVC		

LED-VORSCHALTGERÄT DALI M. THERMOSENSOR 103X67X21MM 99-264V/AC 250-700 MA 12-32W 3-48V EINSTELLB. Ü. DIP SWITCH IP20



Product number 4410-0700-1032-2121

LED-VORSCHALTGERÄT 168X50X30 MM 108-305V/AC 350-800MA 50W 30-115V 0-10V U. ASTRO DIMMBAR IP64




Product number

4440-0800-1050-6364

Height	30mm	Cable conversion:	PVC	IP Schutzart:	IP64
Width	50mm	Cable length:	270mm	Surface and color:	white
Länge:	168mm	Cable type:	single strand		
Screw-on:	Yes	Power consumption:	50W		
Channels:	1	Cable cross section:	0,75mm ²		
Number of wires:	7	At CC:	800mA		
Number of poles:	7	Power supply:	AC - 230V		
Weight:	435g	Material:	Aluminium		

LED-VORSCHALTGERÄT 168X50X30 MM 108-305V/AC 600-1250MA 50W 20-55V 0-10V U. ASTRO DIMMBAR IP64




Product number

4440-1200-1100-6364


Height	30mm	Cable conversion:	PVC	IP Schutzart:	IP64
Width	50mm	Cable length:	270mm	Surface and color:	white
Länge:	168mm	Cable type:	single strand		
Screw-on:	Yes	Power consumption:	50W		
Channels:	1	Cable cross section:	0,75mm ²		
Number of wires:	7	At CC:	1250mA		
Number of poles:	7	Power supply:	AC - 230V		
Weight:	435g	Material:	Aluminium		

LED-STECKERNetzGERÄT MIT PLUG SYSTEM 200-240V/AC 12V/DC 12W IP20 WEISS ZULEITUNG/1500500
MIT HANDZWISCHENSCHALTER KABELENDEN VERZINNT




Product number 4500-0012-0012-2024

LED-STECKERNetzGERÄT MIT PLUG SYSTEM 200-240V/AC 12V/DC 24W IP20 SCHWARZ ZULEITUNG
3000MM RUNDKABEL AWG22



Product number 4500-0012-0024-2023

LED-STECKERNetzGERÄT 220-240V/AC 24V/DC 12W IP65



Product number 4500-0024-0012-0065

Plug: Yes
Power supply: CV
Surface and color: black
At CV: 24
Power consumption: 12W
IP Schutzart: IP64

LED-STECKERNetzGERÄT 100-240V/AC 24V/DC 20W IP20 ZULEITUNG 3500MM



Product number 4500-0024-0020-0020

Height: 30mm
Width: 43mm
Länge: 75mm
Number of poles: 2
Number of wires: 2
Cable end processing: tinned
Plug: Yes
Weight: 95g
Cable conversion: PVC
Material: PVC
Power consumption: 20W
Surface and color: black
At CV: 24
Cable cross section: 0,75mm²
Power supply: AC - 230V
Cable length: 3500mm

Cable type: twin strands
IP Schutzart: IP20

LED-STECKERNETZGERÄT 220-240V/AC 24V/DC 24W IP20 ZULEITUNG 1800MM



Product number


Height: 30mm
Width: 45mm
Länge: 85mm
Number of poles: 2
Channels: 1
Number of wires: 2
Weight: 106g
Plug: Yes

4500-0024-0024-0020


Cable conversion: PVC
Material: PVC
Cable end processing: female connector
Cable type: hose cable
Surface and color: black
At CV: 24
Cable cross section: 0,75mm²
Power supply: AC - 230V
Cable length: 1800mm
Power consumption: 24W
IP Schutzart: IP20



LED COMPONENTS
LED ALUMINIUM PROFILES

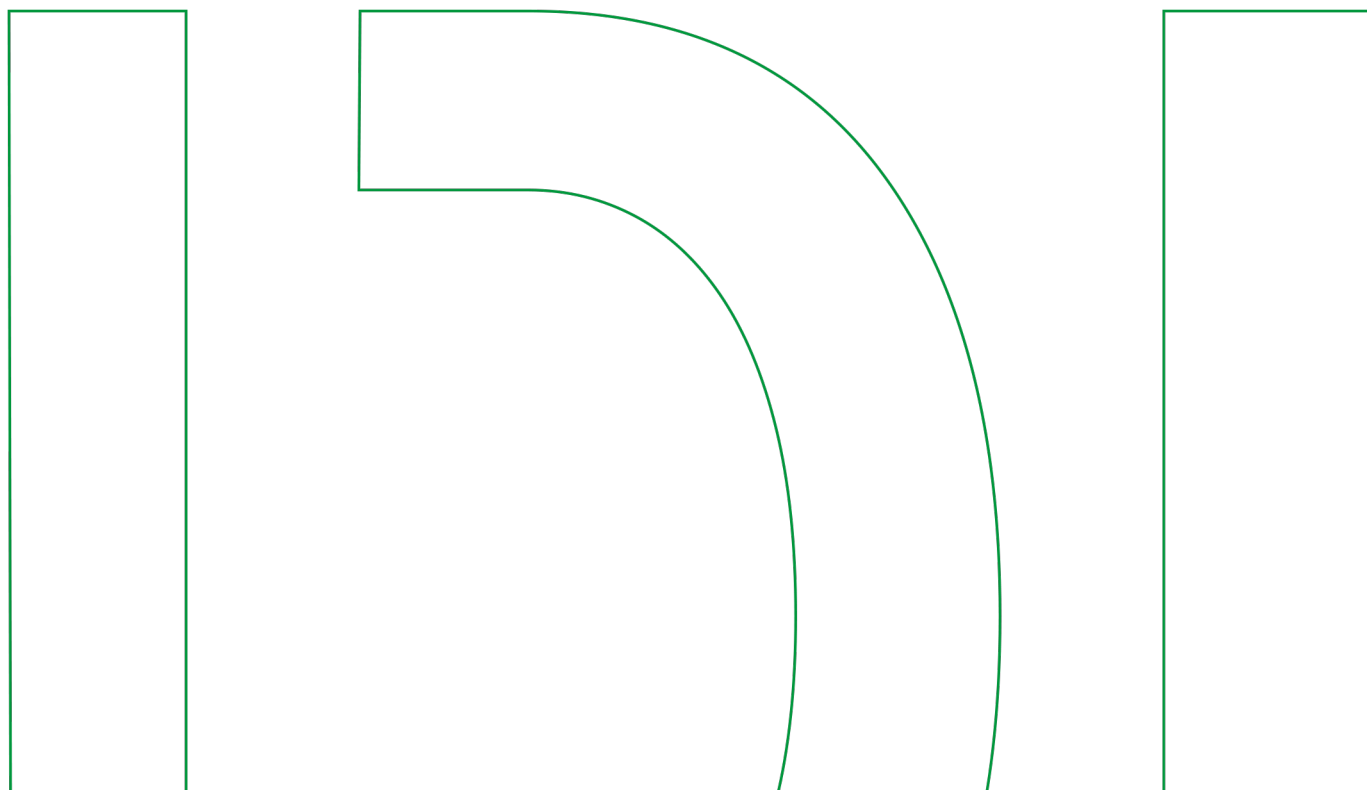


ALU PROFIL 105X50 MM METERWARE ELOXIERT

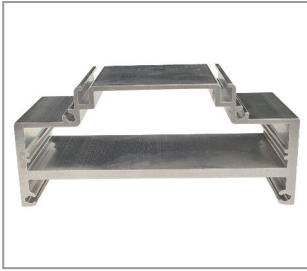

Product number 5000-10550-0000-3519

Height 50mm
Width 105mm
Length: sold by the meter
Surface and color: anodized
Material: Aluminium


ALU PROFIL CD07 18X6,7 MM METERWARE ELOXIERT

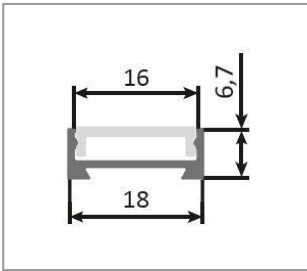

Product number 5000-1806-0000-3519

Height 6.7mm
Width 18mm
Length: sold by the meter
Surface and color: anodized
Material: Aluminium


ALU PROFIL CD07 18X6,7 MM 1.000 MM LG. ELOXIERT

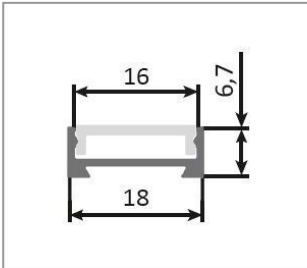

Product number 5000-1806-1000-3519

Height 6.7mm
Width 18mm
Length: 100cm
Surface and color: anodized
Material: Aluminium


ALU PROFIL CD07 18X6,7 MM 2.000 MM LG. ELOXIERT

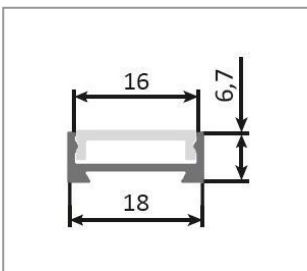

Product number 5000-1806-2000-3519

Height 6.7mm
Width 18mm
Length: 200cm
Surface and color: anodized
Material: Aluminium


ALU PROFIL CD12 18,4X11,43 MM METERWARE ELOXIERT

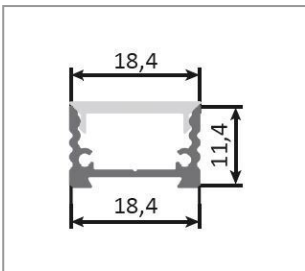

Product number 5000-1811-0000-3519

Height 11.43mm
Width 18.4mm
Length: sold by the meter
Surface and color: anodized
Material: Aluminium


ALU PROFIL CD12 18,4X11,43 MM 420MM LG. ELOXIERT



Product number 5000-1811-0420-3519

Length: sold by the meter


ALU PROFIL CD12 18,4X11,43 MM 620MM LG. ELOXIERT



Product number 5000-1811-0620-3519

Length: sold by the meter


ALU PROFIL CD12 18,4X11,43 MM 2.000MM LG. ELOXIERT



Product number 5000-1811-2000-3519

Length: sold by the meter


ALU PROFIL CD12 18,4X11,43 MM 3.000MM LG. ELOXIERT



Product number 5000-1811-3000-3519

Length: sold by the meter

ALU PROFIL CD18 18,4X17,43 MM METERWARE ELOXIERT

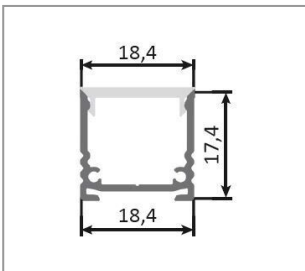

Product number 5000-1817-0000-3519

Height 17.43mm


Width 18.4mm

Length: sold by the meter

Surface and color: anodized

Material: Aluminium


ALU PROFIL CD18 18,4X17,43 MM 2.000MM LANG ELOXIERT



Product number 5000-1817-2000-3519

Length: sold by the meter

ALU PROFIL DIRKET/INDIREKT CDH30 18,4X28,86 MM METERWARE ELOXIERT

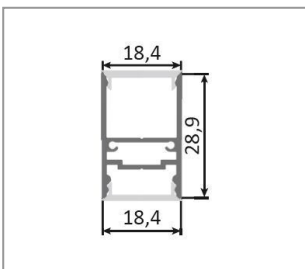

Product number 5000-1828-0000-3519

Height 28.8mm

Width 18.4mm

Length: sold by the meter

Surface and color: anodized


Material: Aluminium

ALU PROFIL DIRKET/INDIREKT CDH30 18,4X28,86X2.500MM ELOXIERT




Product number **5000-1828-2500-3519**
Length: sold by the meter

ALU PROFIL DIRKET/INDIREKT CDH30 18,4X28,86X3.500MM ELOXIERT




Product number **5000-1828-3500-3519**
Length: sold by the meter

ALU PROFIL HERBA21 20,7X13,5 MM 900 MM LG. ELOXIERT




Product number **5000-2013-0900-3519**
Length: sold by the meter

ALU PROFIL HERBA21 20,7X13,5 MM 1000 MM LG. ELOXIERT



Product number **5000-2013-1000-3519**
Length: sold by the meter


ALU PROFIL HERBA21 20,7X13,5 MM 6000 MM LG. ELOXIERT



Product number 5000-2013-6000-3519

Length: sold by the meter


ALU EINBAUPROFIL CDT18 30,4X19,2 MM METERWARE ELOXIERT

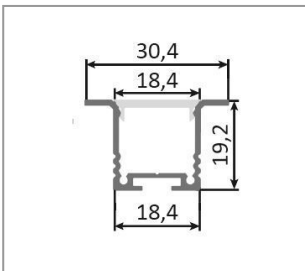

Product number 5000-3019-0000-3519

Height 19.2mm
Width 30.4mm
Length: sold by the meter
Surface and color: anodized
Material: Aluminium

ALU PROFIL 31,8X33 MM F. BLACKLINE L OPTIKEN METERWARE ELOXIERT

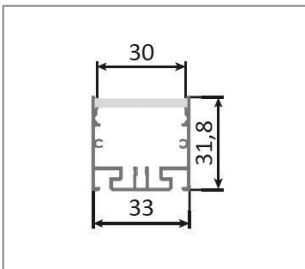

Product number 5000-3133-0000-3519

Height 31.8mm
Width 33mm
Length: sold by the meter
Surface and color: anodized
Material: Aluminium

ALU PROFILABSCHNITT 31,8X33 MM 159MM LG. F. 3ER BLACKLINE L OPTIK ELOXIERT



Product number 5000-3133-0159-3519

Length: sold by the meter


ALU PROFILABSCHNITT 31,8X33 MM 318MM LG. F. 6ER BLACKLINE L OPTIK ELOXIERT



Product number **5000-3133-0318-3519**

Length: sold by the meter


ALU PROFILABSCHNITT 31,8X33 MM 635MM LG. F. 2X6ER BLACKLINE L OPTIK ELOXIERT



Product number **5000-3133-0635-3519**

Length: sold by the meter

ALU PROFILABSCHNITT 31,8X33 MM 953MM LG. F. 6X6ER BLACKLINE L OPTIK ELOXIERT



Product number **5000-3133-0953-3519**

Length: sold by the meter


ALU PROFILABSCHNITT 31,8X33 MM 1111MM LG. F. 3X6ER & 1X3 BLACKLINE OPTIK L ELOXIERT



Product number **5000-3133-1111-3519**


Length: sold by the meter

ALU PROFILABSCHNITT 31,8X33 MM 1270MM LG. F. 8X6ER BLACKLINE L OPTIK ELOXIERT




Product number **5000-3133-1270-3519**
Length: sold by the meter

ALU PROFILABSCHNITT 31,8X33 MM 1270MM LG. F. 8X6ER BLACKLINE L OPTIK SCHWARZ




Product number **5000-3133-1270-3523**
Length: sold by the meter

ALU PROFILABSCHNITT 31,8X33 MM 1270MM LG. F. 8X6ER BLACKLINE L OPTIK WEISS




Product number **5000-3133-1270-3524**
Length: sold by the meter

ALU PROFILABSCHNITT- 31,8X33 MM 2000MM LG. ELOXIERT



Product number **5000-3133-2000-3519**
Length: sold by the meter


ALU PROFIL DWB40 40X12 MM METERWARE ELOXIERT

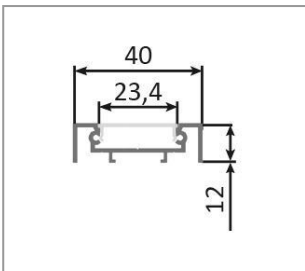

Product number 5000-4012-0000-3519

Height 12mm
Width 40mm
Clipable: yes
Surface and color:aluminum colored
Weight: 1783,5g
Material: Aluminium
Length: 600cm


ALU HALTEPROFIL SFERA 45X15 MM METERWARE ELOXIERT

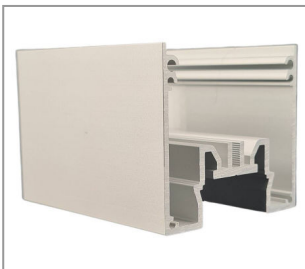

Product number 5000-4515-0000-3519

Height 15mm
Width 45mm
Length: sold by the meter
Surface and color:anodized
Material: Aluminium

ALU PROFIL SFERA 45X50 MM METERWARE ELOXIERT

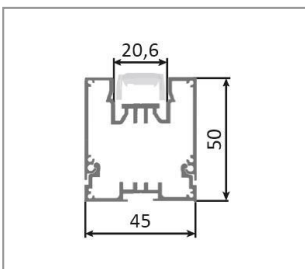

Product number 5000-4550-0000-3519

Height 50mm
Width 45mm
Length: sold by the meter
Surface and color:anodized
Material: Aluminium

ALU PROFIL 57X13 INSERT F. KOMBI SERIE METERWARE ELOXIERT



Product number 5000-5713-0000-3519

Height 13mm
Width 57mm
Length: sold by the meter
Surface and color:anodized
Material: Aluminium

ALU PROFIL 57X13 INSERT F. KOMBI SERIE 70 MM ELOXIERT



Product number **5000-5713-0070-3519**
Height 13mm
Width 57mm
Clipable: yes
Weight: 40,2g
Length: 7cm

ALU PROFIL 57X13 INSERT F. KOMBI SERIE 1120 MM ELOXIERT




Product number **5000-5713-1120-3519**
Height 13mm
Width 57mm
Clipable: yes
Weight: 643g
Surface and color:aluminum colored
Length: 112cm
Material: Aluminium

ALU PROFIL 57X13 INSERT F. KOMBI SERIE 1680 MM ELOXIERT




Product number **5000-5713-1680-3519**
Height 13mm
Width 57mm
Clipable: yes
Weight: 953g
Surface and color:aluminum colored
Length: 168cm
Material: Aluminium

ALU PROFIL 60X50 SFERA T METERWARE ELOXIERT

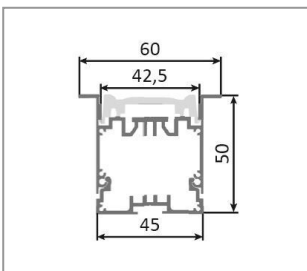

Product number **5000-6050-0000-3519**
Height 50mm
Width 60mm
Length: sold by the meter
Surface and color:anodized
Material: Aluminium

ALU PROFIL 60X80 KOMBI METERWARE ELOXIERT

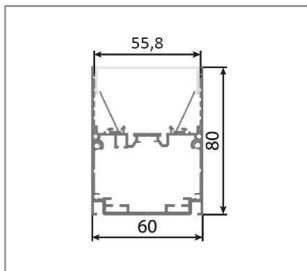

Product number **5000-6080-0000-3519**

Height 80mm
Width 60mm
Length: sold by the meter
Surface and color: anodized
Material: Aluminium


ALU PROFIL 60X80 KOMBI 1142 MM ELOXIERT



Product number **5000-6080-1142-3519**

Height 80mm
Width 60mm
Length: 114,2cm
Surface and color: anodized
Material: Aluminium


ALU PROFIL 60X80 KOMBI 3206 MM ELOXIERT



Product number **5000-6080-3206-3519**

Length: sold by the meter


ALU PROFIL 60X80 KOMBI 3206 MM RAL 9016 WEISS



Product number **5000-6080-3206-3524**


Length: sold by the meter

ALU PROFIL 60X80 KOMBI 4196 MM ELOXIERT



Product number **5000-6080-4196-3519**
Length: sold by the meter

ALU PROFIL 60X80 KOMBI 4196 MM RAL 9016 WEISS



Product number **5000-6080-4196-3524**
Length: sold by the meter

ALU PROFIL 60X90 KOMBI-HCL METERWARE ELOXIERT



Product number **5000-6090-0000-3519**
Height 90mm
Width 60mm
Length: sold by the meter
Surface and color: anodized
Material: Aluminium

ALU PROFIL 60X90 KOMBI-HCL 1142 MM ELOXIERT



Product number **5000-6090-1142-3519**
Height 90mm
Width 60mm
Length: 114,2cm
Surface and color: anodized
Material: Aluminium

ALU PROFIL 78X80 KOMBI T METERWARE ELOXIERT



Product number 5000-7880-0000-3519

Height 80mm
Width 78mm
Length: sold by the meter
Surface and color: anodized
Material: Aluminium

ALU PROFIL 78X80 KOMBI T 1142 MM ELOXIERT



Product number 5000-7880-1142-3519

Height 80mm
Width 78mm
Length: sold by the meter
Surface and color: anodized
Material: Aluminium

ALU BEFESTIGUNGSPROFIL 7,8X14,7 MM F. ALU PROFILE BDH U. CDH30 METERWARE ELOXIERT



Product number 5001-0714-0000-3519

Height 7.8mm
Width 14.7mm
Length: sold by the meter
Surface and color: anodized
Material: Aluminium

ALU PROFILREFLEKTOR 21X12 F. KOMBI SERIE METERWARE ELOXIERT



Product number 5002-2112-0000-3519

Height 21mm
Width 12mm
Length: sold by the meter
Surface and color: anodized
Material: Aluminium

ALU PROFILREFLEKTOR 21X12 F. KOMBI SERIE METERWARE RAL9010 REINWEISS MATT



Product number 5002-2112-0000-3524

Height 21mm
Width 12mm
Length: sold by the meter
Material: Aluminium
Surface and color:white

ALU PROFILABSCHNITT 105X50 MM 412 MM LG. ENTFETTET 7X GEBOHRT ELOXIERT



Product number 5003-10550-0412-3519

Height 50mm
Width 105mm
Length: 41,2cm
Surface and color:anodized
Material: Aluminium

ABDECKUNG PMMA 3,4X29 F. KOMBI HCL METERWARE KLAR



Product number 5100-0329-0000-4771

Height 3.4mm
Width 29mm
Surface and color: transparent
Length: sold by the meter
Material: PMMA

ABDECKUNG PMMA 3,4X29 F. KOMBI HCL 1140 MM KLAR



Product number 5100-0329-1140-4771

Height 3.4mm
Width 29mm
Surface and color: transparent
Material: PMMA
Length: 114cm

ABDECKUNG PMMA U-FORM 14,8X55 F. KOMBI SERIE METERWARE OPAL-WEISS



Product number 5100-1455-0000-4724

Height 14.8mm
Width 55mm
Length: sold by the meter
Material: PMMA
Surface and color: white


ABDECKUNG PMMA U-FORM 14,8X55 F. KOMBI SERIE METERWARE KLAR



Product number 5100-1455-0000-4771

Height 14.8mm
Width 55mm
Clipable: yes
Surface and color: transparent
Length: sold by the meter
Material: PMMA

ABDECKUNG PMMA U-FORM 14,8X55 F. KOMBI SERIE METERWARE SATINIERT



Product number **5100-1455-0000-4772**
Length: sold by the meter

ABDECKUNG PMMA U-FORM 14,8X55 F. KOMBI SERIE 1140 MM OPAL-WEISS



Product number **5100-1455-1140-4724**
Height 14.8mm
Width 55mm
Clipable: yes
Material: PMMA
Length: 114cm
Surface and color:white

ABDECKUNG PMMA U-FORM 14,8X55 F. KOMBI SERIE 2088 MM OPAL-WEISS



Product number **5100-1455-2088-4724**
Height 14.7mm
Width 58mm
Clipable: yes
Length: 208,8cm
Material: PMMA
Weight: 300,7g
Surface and color:white

ABDECKUNG PMMA U-FORM 14,8X55 F. KOMBI SERIE 2533 MM OPAL-WEISS



Product number **5100-1455-2533-4724**
Height 14.7mm
Width 58mm
Clipable: yes
Length: 253,3cm
Material: PMMA
Weight: 364,75g
Surface and color:white

ABDECKUNG PMMA U-FORM 14,8X55 F. KOMBI SERIE 3941 MM OPAL-WEISS



Product number 5100-1455-3941-4724

Height 14.55mm
Width 58mm
Clipable: yes
Length: 394,1cm
Material: PMMA
Weight: 567,5g
Surface and color:white

ABDECKUNG PC 15,6X3,8 MM F. ALU PROFIL CD07 METERWARE OPAL-WEISS



Product number 5100-1503-0000-4724

Height 3.8mm
Width 15.6mm
Clipable: yes
Material: PC
Surface and color:opal-white
Length: 600cm

ABDECKUNG PC 18,4X4,5 MM F. ALU PROFILSERIE CD METERWARE OPAL-WEISS



Product number 5100-1804-0000-4724

Height 4.5mm
Width 18.4mm
Clipable: yes
Length: sold by the meter
Material: PC
Surface and color:opal-white


ABDECKUNG PC 18,4X4,5 MM F. ALU PROFILSERIE CD METERWARE SATINIERT



Product number 5100-1804-0000-4772

Height 4.5mm
Width 18.4mm
Clipable: yes
Length: sold by the meter
Surface and color:satin-finished
Material: PC

ABDECKUNG PC 18,4X4,5 MM 2.000MM LG. F. ALU PROFILSERIE CD OPAL-WEISS




Product number **5100-1804-2000-4724**
Length: sold by the meter

ABDECKUNG PC 18,4X4,5 MM 3.000MM LG. F. ALU PROFILSERIE CD OPAL-WEISS




Product number **5100-1804-3000-4724**
Length: sold by the meter

ABDECKUNG PMMA PLATTE 58X3 F. KOMBIPROFILE 206 MM LG. MIKROPRISMATISCH UGR REDUZIEREND




Product number **5100-5803-0206-4791**
Length: sold by the meter

ABDECKUNG PMMA PLATTE 58X3 F. KOMBIPROFILE 585 MM LG. MIKROPRISMATISCH UGR REDUZIEREND



Product number **5100-5803-0585-4791**
Length: sold by the meter

ABDECKUNG PMMA PLATTE 58X3 F. KOMBIPROFILE 772MM LG. MIKROPRISMATISCH UGR REDUZIEREND



Product number 5100-5803-0772-4791

Length: sold by the meter

ABDECKUNG PMMA PLATTE 58X3 F. KOMBIPROFILE 841 MM LG. MIKROPRISMATISCH UGR REDUZIEREND



Product number 5100-5803-0841-4791

Length: sold by the meter

ABDECKUNG PMMA PLATTE 58X3 F. KOMBIPROFILE 1140 MM LG. OPAL-WEISS



Product number 5100-5803-1140-4724

Height 3mm
Width 58mm
Material: PMMA
Length: 114cm
Surface and color: opal-white


ABDECKUNG PMMA PLATTE 58X3 F. KOMBIPROFILE 1140 MM LG. MIKROPRISMATISCH UGRREDUZIEREND



Product number 5100-5803-1140-4791

Height 3mm
Width 58mm
Surface and color: prismatic
Material: PMMA
Length: 114cm

ABDECKUNG PMMA PLATTE 58X3 F. KOMBIPROFILE 1418 MM LG. MIKROPRISMATISCH UGRREDUZIEREND



Product number **5100-5803-1418-4791**

Height 3mm
Width 58mm
Surface and color:prismatic
Length: 141,8cm
Material: PMMA


ABDECKUNG PMMA PLATTE 58X3 F. KOMBIPROFILE 1500 MM LG. MIKROPRISMATISCH UGRREDUZIEREND



Product number **5100-5803-1500-4791**


Height 3mm
Width 58mm
Length: 150cm
Surface and color:prismatic
Material: PMMA

DIN 7985 LINSENSCHRAUBE M2,5X4 M. KREUZSCHLITZ KU PA6 NATUR



Product number **1203-7985-2504-4122**

SET-TÜTE ENDKAPPE ALU 30,4X19,2 MM F. CDT18 INKL. 2 SCHRAUBEN ELOXIERT

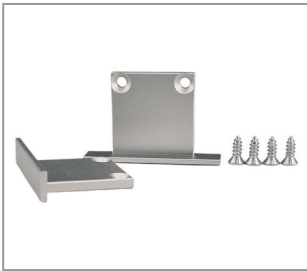

Product number **3401-0003-3019-3519**

Height 30.4mm
Width 19.2mm
Screw-on: Yes
Surface and color: anodized
Material: Aluminium


SET-TÜTE 2X ENDKAPPE ABS 18X6,7 MM F. ALU PROFIL CD07 ALUFARBIG



Product number **3401-0006-1806-7240**

Width 6.7mm
Länge: 18mm
Surface and color: aluminum colored
Material: Plastic


SET-TÜTE 2X ENDKAPPE PVC 18,4X11,43 MM F. ALU PROFIL CD12 INKL. 4 SCHRAUBEN ALUFARBIG

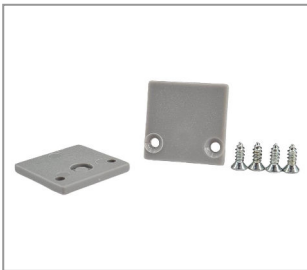

Product number **3401-0006-1811-8740**

Height 0mm
Width 11.43mm
Länge: 18,4mm
Screw-on: Yes
Surface and color: aluminum colored
Material: Plastic

SET-TÜTE 2X ENDKAPPE PVC 18,4X17,43 MM F. ALU PROFIL CD18 INKL. 4 SCHRAUBEN

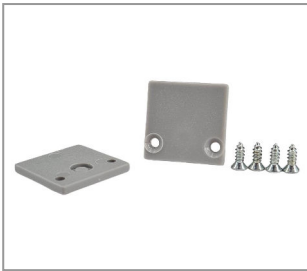

Product number 3401-0006-1817-8740

Width 17.43mm
Länge: 18,4mm
Screw-on: Yes
Surface and color:aluminum colored
Material: Plastic

SET-TÜTE 2X ENDKAPPE ALU 18,4X30 MM F. BDH U. CDH30 INKL. 4 SCHRAUBEN ELOXIERT



Product number 3401-0006-1830-3519


Width 18.4mm
Länge: 30mm
Screw-on: Yes
Surface and color:anodized
Material: Aluminium

BALLROOM REPARATURKIT CHROME INKL. LED, G4 FASSUNG UND MESSINGDREHTEIL CHROM



Product number 3410-0004-4337-3102

BALLROOM REPARATURKIT SCHWARZ INKL. LED, G4 FASSUNG UND MESSINGDREHTEIL SCHWARZ



Product number 3410-0004-4337-3123

ENDKAPPE ALU 31,8X33 MM F. BLACKLINE L PROFIL 2X EINSEITIG GESENKT F. M2,2 SCHRAUBE ROH



Product number 5200-3133-0000-3501

Height 31.8mm
Width 33mm
Screw-on: Yes
Surface and color: raw
Material: Aluminium

ENDKAPPE ALU 31,8X33 MM F. BLACKLINE L PROFIL 2X EINSEITIG GESENKT F. M2,2 SCHRAUBE ELOXIERT



Product number 5200-3133-0000-3519

Height 31.8mm
Width 33mm
Screw-on: Yes
Surface and color: anodized
Material: Aluminium

ENDKAPPE ALU 31,8X33 MM F. BLACKLINE L PROFIL 2X EINSEITIG GESENKT F. M2,2 SCHRAUBE SCHWARZ GEPULVERT



Product number 5200-3133-0000-3523

Height 2mm
Width 31.8mm
Länge: 33mm
Screw-on: Yes
Surface and color: black
Weight: 5,1g
Material: Aluminium

ENDKAPPE ALU 45X50MM F. SFERA ELOXIERT



Product number 5200-4550-0425-3519

Width 45mm
Länge: 50mm
Screw-on: Yes
Weight: 11,57g
Surface and color: anodized
Material: Aluminium

ENDKAPPE ALU 60X50 F. SFERA T 4X DURCHGANGSLOCH Ø 2,5 MM ELOXIERT



Product number 5200-6050-0425-3519
Width 44.9mm
Länge: 50mm
Screw-on: Yes
Weight: 12.88g
Surface and color: anodized
Material: Aluminium

FE ENDKAPPE 60X80 F. KOMBI PUNKTGESCHWEISST M. WINKEL U. 2X M3 GEW. ROH




Product number 5200-6080-0000-2101
Height 32mm
Width 60mm
Länge: 80mm
Screw-on: Yes
Material: Iron
Thread type: IG
Thread size: M3
Surface and color: raw
Weight: 110.25g

ENDKAPPE FE 60X80 F. KOMBI PUNKTGESCHWEISST M. WINKEL U. 2X M3 GEW. RAL9006 FEINSTRUKTUR GEPULVERT




Product number 5200-6080-0000-2126
Width 60mm
Länge: 80,3mm
Screw-on: Yes
Material: Iron
Weight: 112,19g

FE ENDKAPPE 60X90 F. KOMBI HCL PUNKTGESCHWEISST M. WINKEL U. 2X M3 GEW. ROH




Product number 5200-6090-0000-2101
Width 60mm
Länge: 90,3mm
Screw-on: Yes
Weight: 119,21g
Material: Iron
Surface and color: raw

FE ENDKAPPE 60X90 F. KOMBI HCL PUNKTGESCHWEISST M. WINKEL U. 2X M3 GEW. RAL 9016 WEISS



Product number **5200-6090-0000-2124**


ENDKAPPE FE 60X90 F. KOMBI HCL PUNKTGESCHWEISST M. WINKEL U. 2X M3 GEW. RAL9006 FEINSTRUKTUR GEPULVER

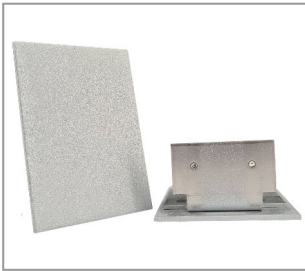

Product number **5200-6090-0000-2126**

Width 60mm
Länge: 90,2mm
Screw-on: Yes
Weight: 120,62g
Material: Iron

ENDKAPPE ALU 60X90 F. KOMBI HCL M. WINKEL U. 2X M3 GEW. VERKLEBT ELOXIERT



Product number **5200-6090-0000-3519**

Width 60mm
Länge: 90mm
Screw-on: Yes
Surface and color: anodized
Weight: 61,64g
Material: Aluminium


ENDKAPPE ALU 78X80 F. KOMBI T 4X DURCHGANGSLOCH Ø 3,2 MM ELOXIERT



Product number **5200-7880-0005-3519**

Height 78mm
Width 80mm
Länge: 10mm
Screw-on: Yes
Surface and color: aluminum colored
Thread size: M3
Material: Aluminium
Weight: 87g

ANBAUHALTER FEDERSTAHL L56XB22XH12 EINCLIPSBAR 1X RL50 2X LL 80



Product number 5300-5622-0005-2104

Height 12mm
Width 22.5mm
Länge: 52,6mm
Screw-on: Yes
Clipable: yes
Material: Stainless steel
Weight: 5,2g
Surface and color:raw


FE HALTEFEDER F. KOMBI T-PROFIL 93X30 MM M. M4 BLINDNIETMUTTER VERZINKT



Product number 5300-9330-0004-2104


Height 93mm
Width 30mm
Screw-on: Yes
Thread type: IG
Material: Stainless steel
Thread size: M4
Surface and color:raw
Weight: 36g

ALU DESIGNBLENDE 150X57X2 MM WEISS




Product number 7921-0150-0057-3524

DESIGNBLENDE 70X160MMMM WEISS GEPULVERT




Product number 7921-0160-0070-3524

DESIGNBLENDE 160X120MMMM WEISS BESCHICHTET



Product number **7921-0160-0120-3524**

ALU DESIGNBLENDE 250X140MMMM SCHWARZ FEINSTRUKTUR GEPULVERT




Product number **7921-0250-0140-3523**

ALU DESIGNBLENDE 260X260MMMM SCHWARZ FEINSTRUKTUR GEPULVERT




Product number **7921-0260-0260-3523**

AIMG SCHRANKAUFBAUKASTEN F. TRILUX BETTENSCHIENE 982X105X190MM LOCHBILD FÜR TRILUX SANESCA ROH




Product number **7921-0982-0105-3501**

AIMG SCHRANKAUFBAUKASTEN F. TRILUX BETTENSCHIENE 982X105X190MM LOCHBILD FÜR TRILUX SANESCA WEISS GEPULVERT




Product number **7921-0982-0105-3524**

AIMG MONTAGEBLECH W40 1198X275X2 MM NACH M. LOCHBILD NACH ZEICHNUNG




Product number **7921-1198-0283-3501**

AIMG MONTAGEBLECH W40 1198X275X2 MM WEISS FEINSTRUKTUR GEPULVERT




Product number **7921-1198-0283-3524**

ANBAUBLECH OPENDO D1 1.200X200MM WEISS GEPULVERT




Product number **7921-1200-0200-3524**

AIMG EINLEGEBLECH 1215X395X2 MM LOCHBILD OPENDO D1



Product number **7921-1215-0395-3501**

AIMG EINLEGEBLECH 1230X402X50 MM GEKANTET LOCHBILD OPENDO D1 WEISS




Product number **7921-1215-0395-3524**

AIMG EINLEGEBLECH 1220X160X2 MM LOCHBILD OPENDO D1




Product number **7921-1220-0160-3501**

AIMG EINLEGEBLECH 1220X160X2 MM LOCHBILD OPENDO D1 WEISS FEINSTRUKTUR GEPULVERT




Product number **7921-1220-0160-3524**

AIMG EINLEGEBLECH 1245X185X2 MM LOCHBILD OPENDO D1




Product number **7921-1245-0185-3501**

AIMG EINLEGEBLECH 1245X185X2 MM LOCHBILD OPENDO D1 WEISS




Product number **7921-1245-0185-3524**

AIMG EINLEGEBLECH 1250X180X2 MM LOCHBILD OPENDO D1




Product number **7921-1250-0180-3501**

AIMG EINLEGEBLECH 1250X178X2 MM LOCHBILD OPENDO D1 WEISS



Product number **7921-1250-0180-3524**

AIMG MONTAGEBLECHBLECH 1250X250X2 MM LOCHBILD OPENDO D1




Product number **7921-1250-0250-3501**

AIMG MONTAGEBLECHBLECH 1250X250X2 MM LOCHBILD OPENDO D1 WEISS FEINSTRUKTURGEPULVERT




Product number **7921-1250-0250-3524**

AIMG MONTAGEBLECHBLECH 1270X210X2 MM LOCHBILD OPENDO D1




Product number **7921-1270-0210-3501**

AIMG MONTAGEBLECHBLECH 1270X210X2 MM LOCHBILD OPENDO D1 WEISS FEINSTRUKTURGEPULVERT




Product number **7921-1270-0210-3524**

ANBAUBLECH 1350X400MM OPENDPO D1 F. RIGIPS WEISS GEPULVERT




Product number **7921-1350-0400-3524**

AIMG MONTAGEBLECHBLECH 1400X250X2 MM LOCHBILD OPENDO D1




Product number **7921-1400-0250-3501**

AIMG MONTAGEBLECHBLECH 1400X250X2 MM LOCHBILD OPENDO D1 WEISS FEINSTRUKTURGEPULVERT




Product number **7921-1400-0250-3524**

AIMG MONTAGEBLECHBLECH 1400X400X2 MM LOCHBILD OPENDO D1




Product number **7921-1400-0400-3501**

AIMG MONTAGEBLECHBLECH 1400X400X2 MM LOCHBILD OPENDO D1 WEISS FEINSTRUKTURGEPULVERT



Product number **7921-1400-0400-3524**

AIMG EINLEGEBLECH 1515X263X2 MM LOCHBILD OPENDO D2




Product number **7921-1515-0263-3501**

AIMG EINLEGEBLECH 1515X263X2 MM LOCHBILD OPENDO D2 WEISS




Product number **7921-1515-0263-3524**

AIMG EINLEGEBLECH 1524X395X50 MM GEKANTET LOCHBILD OPENDO D1 WEISS




Product number **7921-1524-0395-3524**

AIMG EINLEGEBLECH 1543X395X50 MM GEKANTET LOCHBILD OPENDO D2 WEISS




Product number **7921-1543-0395-3524**

AIMG MONTAGEBLECHBLECH 1600X400X2 MM LOCHBILD OPENDO D2 MITTIG GESTOSSEN




Product number **7921-1600-0400-3501**

AIMG MONTAGEBLECHBLECH 1600X400X2 MM LOCHBILD OPENDO D2 WEISS FEINSTRUKTURGEPULVERT




Product number **7921-1600-0400-3524**

ANBAUBLECH 1640X400MM OPENDPO D2 F. RIGIPS WEISS GEPULVERT




Product number **7921-1640-0400-3524**

AIMG MONTAGEBLECHBLECH 1650X250X2 MM LOCHBILD OPENDO D2




Product number **7921-1650-0250-3501**

AIMG MONTAGEBLECHBLECH 1650X250X2 MM LOCHBILD OPENDO D2 WEISS FEINSTRUKTURGEPULVERT




Product number **7921-1650-0250-3524**

ANBAUBLECH FIDESCA D2 1.650X350MM WEISS GEPULVERT




Product number **7921-1650-0350-3524**

AIMG EINLEGEBLECH 1650X395X50 MM GEKANTET LOCHBILD OPENDO D1 WEISS




Product number **7921-1650-0395-3524**

AIMG MONTAGEBLECHBLECH 1650X400X2 MM LOCHBILD OPENDO D2




Product number **7921-1650-0400-3501**

AIMG MONTAGEBLECHBLECH 1650X400X2 MM LOCHBILD OPENDO D2 WEISS FEINSTRUKTURGEPULVERT




Product number **7921-1650-0400-3524**

AIMG EINLEGEBLECH 1824X395X50 MM GEKANTET LOCHBILD OPENDO D2 WEISS




Product number **7921-1824-0395-3524**

AIMG EINLEGEBLECH 1975X395X2 MM LOCHBILD OPENDO D1




Product number **7921-1975-0395-3501**

AIMG EINLEGEBLECH 1970X395X50 MM GEKANTET LOCHBILD OPENDO D1 WEISS



Product number **7921-1975-0395-3524**

AIMG EINLEGEBLECH N61 2735X585X2 MM LOCHBILD 2X OPENDO D1 WEISS GLÄNZEND



Product number **7921-2735-0585-3524**

ANBAUBLECH 2800X400MM 2X OPENDPO D1 F. RIGIPS WEISS GEPULVERT



Product number **7921-2800-0400-3524**

FE VERBINDER 43,4X120 / 90° 8X GEW. M3 VERZINKT




Product number

5400-4312-0003-2104

Height 2mm
Width 120mm
Länge: 120mm
Screw-on: Yes
Weight: 129,25g
Material: Iron
Thread type: IG
Thread size: M3

Surface and color:raw

FE VERBINDER 43,4X190 / 180° 8X GEW. M3 VERZINKT



Product number

5400-4319-0003-2104

Height 2mm
Width 43.4mm
Länge: 190mm
Screw-on: Yes
Surface and color:zinc-plated
Material: Iron
Thread type: IG
Thread size: M3

Weight: 126g

SET-TÜTE 1X EINBAUFEDER 40,50X51,16 MM INKL. 2 SCHRAUBEN




Product number 3402-0003-4051-2104
Width 40.5mm
Länge: 51,16mm
Screw-on: Yes
Surface and color: zinc-plated
Material: Iron

SET-TÜTE 2X BEFESTIGUNGSPROFIL 50 MM LG F. CDH30 INKL. 2 SCHRAUBEN



Product number 3402-0004-0714-3519
Height 7mm
Width 14mm
Länge: 50mm
Clipable: yes
Surface and color: anodized
Material: Aluminium

SET-TÜTE 2X HALTER F. ALU PROFIL HERBA21 INKL. 2 SCHRAUBEN



Product number 3402-0004-1722-2104

SET-TÜTE 2X STANDARD HALTER F. ALU PROFILSERIE CD INKL. 2 SCHRAUBEN



Product number 3402-0004-1912-2104
Height 12mm
Width 19mm
Screw-on: Yes
Clipable: yes
Surface and color: zinc-plated
Material: Iron

SET-TÜTE 2X HALTER HOHE HALTEKRAFT F. ALU PROFILSERIE CD INKL. 2 SCHRAUBEN



Product number 3402-0004-2014-2104
Height 14mm
Width 20mm
Screw-on: Yes
Clipable: yes
Surface and color: zinc-plated
Material: Iron

SET-TÜTE 2X KU EINCLIPSHALTER F. ALU PROFILSERIE CD INKL. 2 SCHRAUBEN



Product number 3402-0004-2412-7327
Height 2.5mm
Width 12mm
Länge: 24mm
Screw-on: Yes
Clipable: yes
Surface and color: transparent
Weight: 2,04g
Diameter inside: 3,3mm
Material: Plastic

SET-TÜTE PENDEL 2000 MM LG. M. 3X0,75 FEP/PVC TRANSPARENT




Product number 3402-3075-0016-0027
Länge: 2000mm
Bayonet: Yes
Number of wires: 3
Cable end processing: ferrule
Cable type: hose cable
Surface and color: nickel-matt
Cable cross section: 0,75mm²
Cable conversion: FEP/PVC

SET-TÜTE PENDEL 2000 MM LG. M. 5X0,75 FEP/PVC TRANSPARENT



Product number 3402-5075-0016-0027
Länge: 2000mm
Surface and color: transparent

SET 2X LITZENSEIL INSERT-SICHERUNG Ø 1,5 MM 300 MM LG. M. 4 SCHRAUBEN



Product number 3403-0006-0300-2104

Länge: 300mm
Screw-on: Yes
Outer diameter: 1,5mm
Surface and color: zinc-plated
Material: Iron

SET-TÜTE SEILSTOPPER Y-AUFHÄNGUNG 9X24 M. 310MM KABEL U. STAHLSEILABSCHNITT Ø 1,2/1500 MM LG. M. DECKENHALTER U. NIPPEL



Product number 3495-0602-1500-3114

Länge: 1500mm
Outer diameter: 1,2mm

SET-TÜTE SEILSTOPPER Y-AUFHÄNGUNG 9X24 M. 100MM KABEL U. STAHLSEILABSCHNITT Ø 1,2/1500 MM LG M. DECKENHALTER U. NIPPEL VERNICKELT



Product number 3495-0602-1501-3114

Länge: 1500mm
Outer diameter: 1,2mm

SET-TÜTE SEILSTOPPER Y-AUFHÄNGUNG 9X24 M. 100MM KABEL U. STAHLSEILABSCHNITT Ø 1,2/1500 MM LG M. DECKENHALTER U. NIPPEL SCHWARZ




Product number 3495-0602-1501-3123

Länge: 1500mm
Outer diameter: 1,2mm



LED COMPONENTS
LED HEAT SINKS

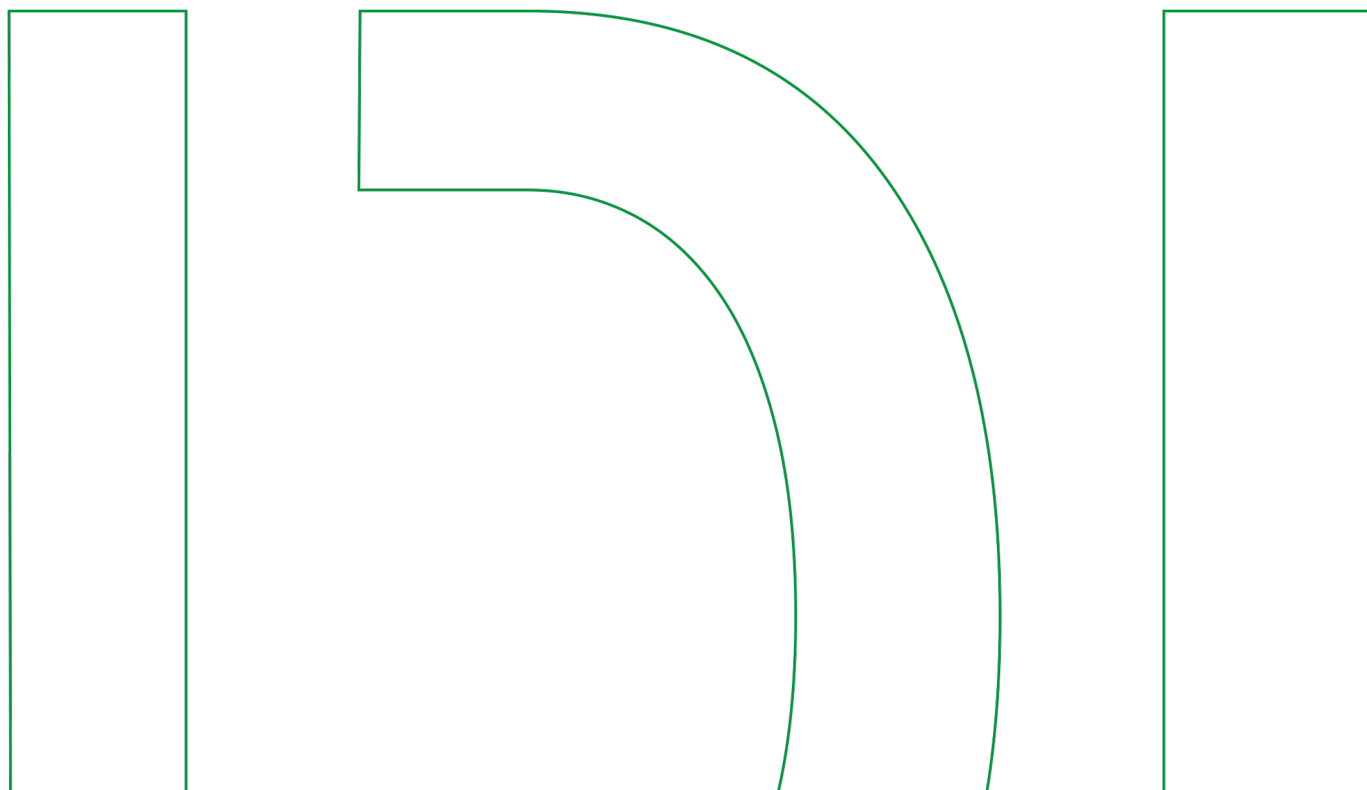


ALU STRANGPRESSKÜHLKÖRPER Ø 47X50 MM CA. 10W KÜHLLLEISTUNG SCHWARZ-ELOXIERT



Product number 6011-0047-0050-1023

Height: 50mm
Screw-on: Yes
Cooling capacity: 10W
Surface and color: black
Outer diameter: 47,0mm
Material: Aluminium
Weight: 129,5g

ALU STRANGPRESSKÜHLKÖRPER Ø 70X50 MM CA. 23W KÜHLLLEISTUNG SCHWARZ-ELOXIERT

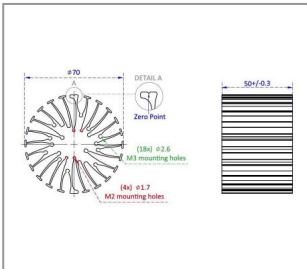

Product number 6011-0070-0050-2323

Height: 50mm
Screw-on: Yes
Cooling capacity: 23W
Outer diameter: 70,0mm
Surface and color: black
Weight: 175,25g
Material: Aluminium

ALU STRANGPRESSKÜHLKÖRPER Ø 70X80 MM CA. 28W KÜHLLLEISTUNG SCHWARZ-ELOXIERT



Product number 6011-0070-0080-2823

Height: 80mm
Outer diameter: 70,0mm
Surface and color: black
Cooling capacity: 28W
Material: Aluminium


ALU STRANGPRESSKÜHLKÖRPER Ø 99X50 MM CA. 37W KÜHLLLEISTUNG SILBER-ELOXIERT



Product number 6011-0099-0050-3719


Height: 50mm
Screw-on: Yes
Surface and color: silver
Outer diameter: 99,0mm
Cooling capacity: 37W
Material: Aluminium

ALU STRANGPRESSKÜHLKÖRPER Ø 99X50 MM CA. 37W KÜHLLLEISTUNG SCHWARZ



Product number **6011-0099-0050-3723**
Height 50mm
Surface and color:black
Outer diameter: 99,0mm
Cooling capacity: 37W
Material: Aluminium

ALU STRANGPRESSKÜHLKÖRPER Ø134X100 MM CA. 75W KÜHLLLEISTUNG SCHWARZ



Product number **6011-0134-0100-7523**


ALU STIFT KÜHLKÖRPER Ø 60X50 MM CA. 12W KÜHLLLEISTUNG SCHWARZ-ELOXIERT



Product number **6021-0060-0050-1223**
Height 50mm
Screw-on: Yes
Cooling capacity: 12W
Surface and color:black
Outer diameter: 60,0mm
Material: Aluminium
Weight: 111,2g



LED COMPONENTS
LED REFLECTORS

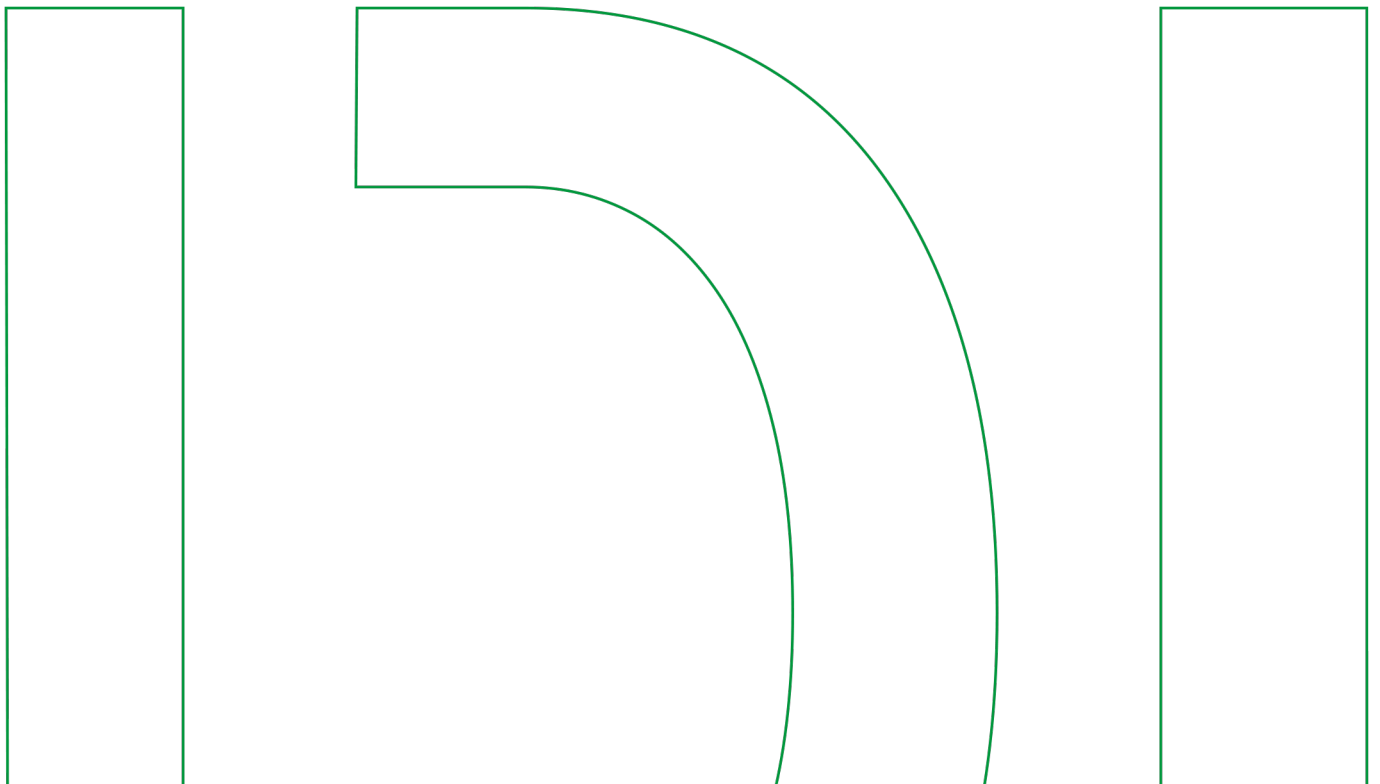

KU HYBRIDREFLEKTOR Ø 69X21X11,2 MM ABSTRAHLWINKEL 12° PMMA TRANSPARENT METALLISIERT



Product number 7100-0069-1112-4736

Height 11.2mm
Surface and color:transparent
beam angle: 12 degrees
Outer diameter: 69,0mm
Diameter inside: 20,0mm
Weight: 26,5g
Material: Plastic

KU HYBRIDREFLEKTOR Ø 69X21X11,2 MM ABSTRAHLWINKEL 24° PMMA TRANSPARENT METALLISIERT



Product number 7100-0069-1124-4736

Height 11.2mm
Surface and color:transparent
Outer diameter: 69,0mm
Diameter inside: 20,0mm
beam angle: 24 degrees
Weight: 26,5g
Material: Plastic

KU HYBRIDREFLEKTOR Ø 69X21X11,2 MM ABSTRAHLWINKEL 36° PMMA TRANSPARENT METALLISIERT



Product number 7100-0069-1136-4736

Height 11.2mm
Surface and color:transparent
Weight: 26,3g
beam angle: 36 degrees
Diameter inside: 20,0mm
Material: Plastic

ZENTRIERHILFE 42X30X3 MM F. HYBRIDREFLEKTOREN F. COB LES 13X13 PC WEISS



Product number 7901-4230-0300-4724

Height 30mm
Width 3mm
Länge: 42mm
Screw-on: Yes
Holder for: Reflector
Surface and color:white

ZENTRIERHILFE 48X39X3 MM F. HYBRIDREFLEKTOREN F. COB LES 19X19 PC WEISS



Product number 7901-4839-0300-4724

Height 39mm
Width 3mm
Länge: 48mm
Holder for: Reflector
Surface and color:white
Material: Plastic

KU REFLEKTOR UNI SERIE Ø 110X69,6 MM 10° ABSTRAHLWINKEL PC METALLISIERT



Product number 7000-0110-6910-7336
 Height 69.6mm
 Bayonet: Yes
 beam angle: 10 degrees
 Surface and color:metalized
 Outer diameter: 110,0mm
 Weight: 29,4g
 Material: Plastic

KU REFLEKTOR UNI SERIE Ø 110X69,6 MM 24° ABSTRAHLWINKEL PC METALLISIERT



Product number 7000-0110-6924-7336
 Height 69.6mm
 Bayonet: Yes
 beam angle: 24 degrees
 Weight: 37,21g
 Surface and color:metalized
 Outer diameter: 110,0mm
 Material: Plastic

KU REFLEKTOR UNI SERIE Ø 110X69,6 MM 36° ABSTRAHLWINKEL PC METALLISIERT



Product number 7000-0110-6936-7336
 Height 69.6mm
 Bayonet: Yes
 Weight: 39,2g
 beam angle: 36 degrees
 Surface and color:metalized
 Outer diameter: 110,0mm
 Material: Plastic

KU REFLEKTOR UNI SERIE Ø 110X69,6 MM 60° ABSTRAHLWINKEL PC METALLISIERT



Product number 7000-0110-6960-7336
 Height 69.6mm
 Bayonet: Yes
 beam angle: 60 degrees
 Weight: 44,33g
 Surface and color:metalized
 Outer diameter: 110,0mm
 Material: Plastic

KU REFLEKTOR UNI SERIE Ø 42X25,4 MM 18° ABSTRAHLWINKEL PC METALLISIERT



Product number 7000-0042-2518-7336
Height 25.4mm
Bayonet: Yes
Outer diameter: 42,0mm
beam angle: 18 degrees
Weight: 3,97g
Surface and color:metalized
Material: Plastic

KU REFLEKTOR UNI SERIE Ø 42X25,4 MM 24° ABSTRAHLWINKEL PC METALLISIERT



Product number 7000-0042-2524-7336
Height 25.4mm
Bayonet: Yes
Outer diameter: 42,0mm
beam angle: 24 degrees
Surface and color:metalized
Weight: 4,19g
Material: Plastic

KU REFLEKTOR UNI SERIE Ø 42X25,4 MM 36° ABSTRAHLWINKEL PC METALLISIERT



Product number 7000-0042-2536-7336
Height 25.4mm
Bayonet: Yes
Outer diameter: 42,0mm
beam angle: 36 degrees
Weight: 4,68g
Surface and color:metalized
Material: Plastic

KU REFLEKTOR UNI SERIE Ø 42X25,4 MM 60° ABSTRAHLWINKEL PC METALLISIERT



Product number 7000-0042-2560-7336
Height 25.4mm
Bayonet: Yes
Outer diameter: 42,0mm
beam angle: 60 degrees
Surface and color:metalized
Weight: 5,67g
Material: Plastic

KU REFLEKTOR UNI SERIE Ø 50X30,7 MM 15° ABSTRAHLWINKEL PC METALLISIERT



Product number 7000-0050-3015-7336

Height 30.7mm
Bayonet: Yes
Outer diameter: 50,0mm
beam angle: 15 degrees
Weight: 6g
Surface and color:metalized
Material: Plastic

KU REFLEKTOR UNI SERIE Ø 50X30,7 MM 24° ABSTRAHLWINKEL PC METALLISIERT



Product number 7000-0050-3024-7336

Height 30.7mm
Bayonet: Yes
Outer diameter: 50,0mm
Weight: 6,39g
beam angle: 24 degrees
Surface and color:metalized
Material: Plastic

KU REFLEKTOR UNI SERIE Ø 50X30,7 MM 36° ABSTRAHLWINKEL PC METALLISIERT



Product number 7000-0050-3036-7336

Height 30.7mm
Bayonet: Yes
Outer diameter: 50,0mm
beam angle: 36 degrees
Surface and color:metalized
Weight: 6,95g
Material: Plastic

KU REFLEKTOR UNI SERIE Ø 50X30,7 MM 60° ABSTRAHLWINKEL PC METALLISIERT



Product number 7000-0050-3060-7336

Height 30.7mm
Bayonet: Yes
Outer diameter: 50,0mm
Weight: 8,04g
beam angle: 60 degrees
Surface and color:metalized
Material: Plastic

KU REFLEKTOR UNI SERIE Ø 75X44,4 MM 15° ABSTRAHLWINKEL PC METALLISIERT



Product number 7000-0075-4415-7336
Height 44.4mm
Bayonet: Yes
Weight: 12,72g
beam angle: 15 degrees
Outer diameter: 75,0mm
Surface and color:metalized
Material: Plastic

KU REFLEKTOR UNI SERIE Ø 75X44,4 MM 24° ABSTRAHLWINKEL PC METALLISIERT



Product number 7000-0075-4424-7336
Height 44.4mm
Bayonet: Yes
Weight: 20,86g
Outer diameter: 75,0mm
beam angle: 24 degrees
Surface and color:metalized
Material: Plastic

KU REFLEKTOR UNI SERIE Ø 75X44,4 MM 40° ABSTRAHLWINKEL PC METALLISIERT



Product number 7000-0075-4440-7336
Height 44.4mm
Bayonet: Yes
beam angle: 40 degrees
Outer diameter: 75,0mm
Surface and color:metalized
Weight: 21,72g
Material: Plastic

KU REFLEKTOR UNI SERIE Ø 75X44,4 MM 60° ABSTRAHLWINKEL PC METALLISIERT



Product number 7000-0075-4460-7336
Height 44.4mm
Bayonet: Yes
Weight: 20,96g
Outer diameter: 75,0mm
beam angle: 60 degrees
Surface and color:metalized
Material: Plastic

KU REFLEKTOR UNI SERIE Ø 85X53 MM 14° ABSTRAHLWINKEL PC METALLISIERT



Product number 7000-0085-5314-7336
Height 53mm
Bayonet: Yes
Outer diameter: 85,0mm
Weight: 17,04g
Surface and color:metalized
beam angle: 14 degrees
Material: Plastic

KU REFLEKTOR UNI SERIE Ø 85X53 MM 24° ABSTRAHLWINKEL PC METALLISIERT



Product number 7000-0085-5324-7336
Height 53mm
Bayonet: Yes
Weight: 20,09g
Outer diameter: 85,0mm
beam angle: 24 degrees
Surface and color:metalized
Material: Plastic

KU REFLEKTOR UNI SERIE Ø 85X53 MM 36° ABSTRAHLWINKEL PC METALLISIERT



Product number 7000-0085-5336-7336
Height 53mm
Bayonet: Yes
Outer diameter: 85,0mm
beam angle: 36 degrees
Weight: 21,33g
Surface and color:metalized
Material: Plastic

KU REFLEKTOR UNI SERIE Ø 85X53 MM 60° ABSTRAHLWINKEL PC METALLISIERT



Product number 7000-0085-5360-7336
Height 53mm
Bayonet: Yes
Outer diameter: 85,0mm
beam angle: 60 degrees
Surface and color:metalized
Weight: 24,27g
Material: Plastic

KU REFLEKTOR UNI SERIE Ø 92X44 MM 24° ABSTRAHLWINKEL PC METALLISIERT



Product number 7000-0092-4424-7336
Height 44mm
Bayonet: Yes
Outer diameter: 92,0mm
Weight: 21,5g
beam angle: 24 degrees
Surface and color:metalized
Material: Plastic

KU REFLEKTOR UNI SERIE Ø 92X44 MM 40° ABSTRAHLWINKEL PC METALLISIERT



Product number 7000-0092-4440-7336
Height 44mm
Bayonet: Yes
beam angle: 40 degrees
Outer diameter: 92,0mm
Weight: 22,12g
Surface and color:metalized
Material: Plastic

KU REFLEKTOR UNI SERIE Ø 92X44 MM 60° ABSTRAHLWINKEL PC METALLISIERT



Product number 7000-0092-4460-7336
Height 44mm
Bayonet: Yes
Outer diameter: 92,0mm
beam angle: 60 degrees
Surface and color:metalized
Weight: 31,77g
Material: Plastic

KU ADAPTER SERIE UNI 38X4,6 F. ZHAGA COB KONNEKTOREN M. Ø 35 MM F. REFLEKTOREN BIS Ø 50 MM PC WEISS



Product number 7900-3804-0000-4724
Height 4.6mm
Clipable: yes
Outer diameter: 38,0mm
Holder for: Reflector
Weight: 1,42g
Surface and color:white
Material: Plastic

FE ADAPTERRING SERIE UNI 42X5,6 MM F. ZHAGA COB KONNEKTOREN M. Ø 50 MM F. REFLEKTOREN > Ø 50 MM VERNICKELT



Product number 7900-4205-0000-2104

Height 5,6mm
Screw-on: Yes
Surface and color: nickel plated
Outer diameter: 42,0mm
Weight: 2g
Material: Iron
Holder for: Reflector

KU REFLEKTOR TWIST SERIE Ø 75X MM 24° ABSTRAHLWINKEL PC METALLISIERT



Product number 7002-0075-0024-7336

Bayonet: Yes
Outer diameter: 75,0mm
Surface and color: metalized
Material: Plastic

KU REFLEKTOR TWIST SERIE Ø 75 MM 40° ABSTRAHLWINKEL PC METALLISIERT



Product number 7002-0075-0040-7336

Bayonet: Yes
beam angle: 40 degrees
Outer diameter: 75,0mm
Surface and color: metalized
Material: Plastic

KU REFLEKTOR TWIST SERIE Ø 75 MM 60° ABSTRAHLWINKEL PC METALLISIERT



Product number 7002-0075-0060-7336

Bayonet: Yes
Outer diameter: 75,0mm
beam angle: 60 degrees
Surface and color: metalized
Material: Plastic

KU REFLEKTOR TWIST SERIE Ø 85X MM 24° ABSTRAHLWINKEL PC METALLISIERT



Product number 7002-0085-0024-7336

Bayonet: Yes
Outer diameter: 85,0mm
beam angle: 24 degrees
Surface and color: metalized
Material: Plastic

KU REFLEKTOR TWIST SERIE Ø 85 MM 40° ABSTRAHLWINKEL PC METALLISIERT



Product number 7002-0085-0040-7336

Bayonet: Yes
beam angle: 40 degrees
Outer diameter: 85,0mm
Surface and color:metalized
Material: Plastic

KU REFLEKTOR TWIST SERIE Ø 85X MM 60° ABSTRAHLWINKEL PC METALLISIERT



Product number 7002-0085-0060-7336

Bayonet: Yes
Outer diameter: 85,0mm
beam angle: 60 degrees
Surface and color:metalized
Material: Plastic

KU REFLEKTOR TWIST SERIE Ø 92X58 MM 24° ABSTRAHLWINKEL PC METALLISIERT



Product number 7002-0092-5824-7336

Height 58mm
Bayonet: Yes
Outer diameter: 92,0mm
Weight: 31g
beam angle: 24 degrees
Surface and color:metalized
Material: Plastic

KU REFLEKTOR TWIST SERIE Ø 92X58 MM 40° ABSTRAHLWINKEL PC METALLISIERT



Product number 7002-0092-5840-7336

Height 58mm
Bayonet: Yes
beam angle: 40 degrees
Outer diameter: 92,0mm
Weight: 31g
Surface and color:metalized
Material: Plastic

KU REFLEKTOR TWIST SERIE Ø 92X58 MM 60° ABSTRAHLWINKEL PC METALLISIERT



Product number 7002-0092-5860-7336

Height 58mm
Bayonet: Yes
Outer diameter: 92,0mm
Weight: 31g
beam angle: 60 degrees
Surface and color: metalized
Material: Plastic

ALUMINIUM REFLEKTOR M4 Ø 69X39 MM 24° ABSTRAHLWINKEL



Product number 7004-0069-3924-3536

Height 39mm
 Bayonet: Yes
 Weight: 9,1g
 Outer diameter: 69,0mm
 beam angle: 24 degrees
 Material: Aluminium

ALUMINIUM REFLEKTOR M4 Ø 92X60,5 MM 24° ABSTRAHLWINKE



Product number 7004-0092-6024-3536

Height 60.5mm
 Bayonet: Yes
 Outer diameter: 92,0mm
 Weight: 19,11g
 beam angle: 24 degrees
 Material: Aluminium

KU ADAPTER M4 SERIE 48X40X9,27 MM F. COB 1919 PC TRANSPARENT



Product number 7900-7004-1919-1927

Height 9.27mm
 Width 40.9mm
 Länge: 48mm
 Screw-on: Yes
 Surface and color: transparent
 Weight: 4,05g
 Material: Plastic

KU ADAPTER M4 SERIE 48X40X9,27 MM F. COB 2024 PC TRANSPARENT



Product number 7900-7004-2024-1927

Height 9.27mm
 Width 40.9mm
 Länge: 48mm
 Screw-on: Yes
 Surface and color: transparent
 Weight: 3,84g
 Material: Plastic

KU DIFFUSORSCHEIBE SERIE UNI Ø 39,8X1,2 MM EINCLIPSBAR IN Ø 42 MM REFLEKTOREN PC TRANSPARENT

Product number 7800-0039-0100-4727

Height 1.2mm
 Clipable: yes
 Surface and color: transparent
 Outer diameter: 39,8mm
 Weight: 2,2g
 Material: Plastic

KU DIFFUSORSCHEIBE SERIE UNI Ø 39,8X1,2 MM EINCLIPSBAR IN Ø 42 MM REFLEKTOREN PC MATT

Product number 7800-0039-0100-4772

Height 1.2mm
 Clipable: yes
 Weight: 1,73g
 Outer diameter: 39,8mm
 Surface and color: matt
 Material: Plastic

KU DIFFUSORSCHEIBE SERIE UNI Ø 47,8X1,2 MM EINCLIPSBAR IN Ø 50 MM REFLEKTOREN PC TRANSPARENT

Product number 7800-0047-0100-4727

Height 1.2mm
 Clipable: yes
 Surface and color: transparent
 Outer diameter: 47,8mm
 Weight: 2,98g
 Material: Plastic

KU DIFFUSORSCHEIBE SERIE UNI Ø 47,8X1,2 MM EINCLIPSBAR IN Ø 50 MM REFLEKTOREN PC MATT

Product number 7800-0047-0100-4772

Height 1.2mm
 Outer diameter: 47,8mm
 Weight: 2,55g
 Surface and color: matt
 Material: Plastic

KU DIFFUSORSCHIBE SERIE UNI Ø 75X2,85 MM VERRASTBAR AUF Ø 75 MM REFLEKTOREN PC TRANSPARENT

Product number 7800-0075-0200-4727

Height 2.85mm
 Clipable: yes
 Surface and color: transparent
 Outer diameter: 75,0mm
 Weight: 6,76g
 Material: Plastic

KU DIFFUSORSCHIBE SERIE UNI Ø 75X2,85 MM VERRASTBAR AUF Ø 75 MM REFLEKTOREN PC MATT

Product number 7800-0075-0200-4772

Height 2.85mm
 Clipable: yes
 Outer diameter: 75,0mm
 Weight: 6,41g
 Surface and color: matt
 Material: Plastic

KU DIFFUSORSCHIBE SERIE UNI Ø 85X3,3 MM VERRASTBAR AUF Ø 85 MM REFLEKTOREN PC TRANSPARENT

Product number 7800-0085-0300-4727

Height 3.3mm
 Clipable: yes
 Surface and color: transparent
 Outer diameter: 85,0mm
 Weight: 10,11g
 Material: Plastic

KU DIFFUSORSCHIBE SERIE UNI Ø 85X3,3 MM VERRASTBAR AUF Ø 85 MM REFLEKTOREN PC MATT

Product number 7800-0085-0300-4772

Height 3.3mm
 Clipable: yes
 Outer diameter: 85,0mm
 Weight: 9,94g
 Surface and color: matt
 Material: Plastic

KU DIFFUSORSCHEIBE SERIE UNI & TWIST Ø 92X3,6 MM VERRASTBAR AUF Ø 92 MM REFLEKTOREN PC TRANSPARENT

Product number 7800-0092-0300-4727

Height 3,6mm
 Clipable: yes
 Surface and color: transparent
 Outer diameter: 92,0mm
 Weight: 13,78g
 Material: Plastic

KU DIFFUSORSCHEIBE SERIE UNI & TWIST Ø 92X3,6 MM VERRASTBAR AUF Ø 92 MM REFLEKTOREN PC MATT

Product number 7800-0092-0300-4772

Height 3,6mm
 Clipable: yes
 Outer diameter: 92,0mm
 Weight: 13,32g
 Surface and color: matt
 Material: Plastic

KU DIFFUSORSCHEIBE SERIE UNI Ø 110X3,7 MM VERRASTBAR AUF Ø 110 MM REFLEKTOREN PC TRANSPARENT

Product number 7800-0110-0300-0427

Height 3,7mm
 Clipable: yes
 Surface and color: transparent
 Weight: 19,88g
 Outer diameter: 110,0mm
 Material: Plastic


KU DIFFUSORSCHEIBE SERIE UNI Ø 110X3,7 MM VERRASTBAR AUF Ø 110 MM REFLEKTOREN PC MATT

Product number 7800-0110-0300-0472

Height 3,7mm
 Clipable: yes
 Weight: 19,51g
 Surface and color: matt
 Outer diameter: 110,0mm
 Material: Plastic



LED COMPONENTS
LED OPTICS

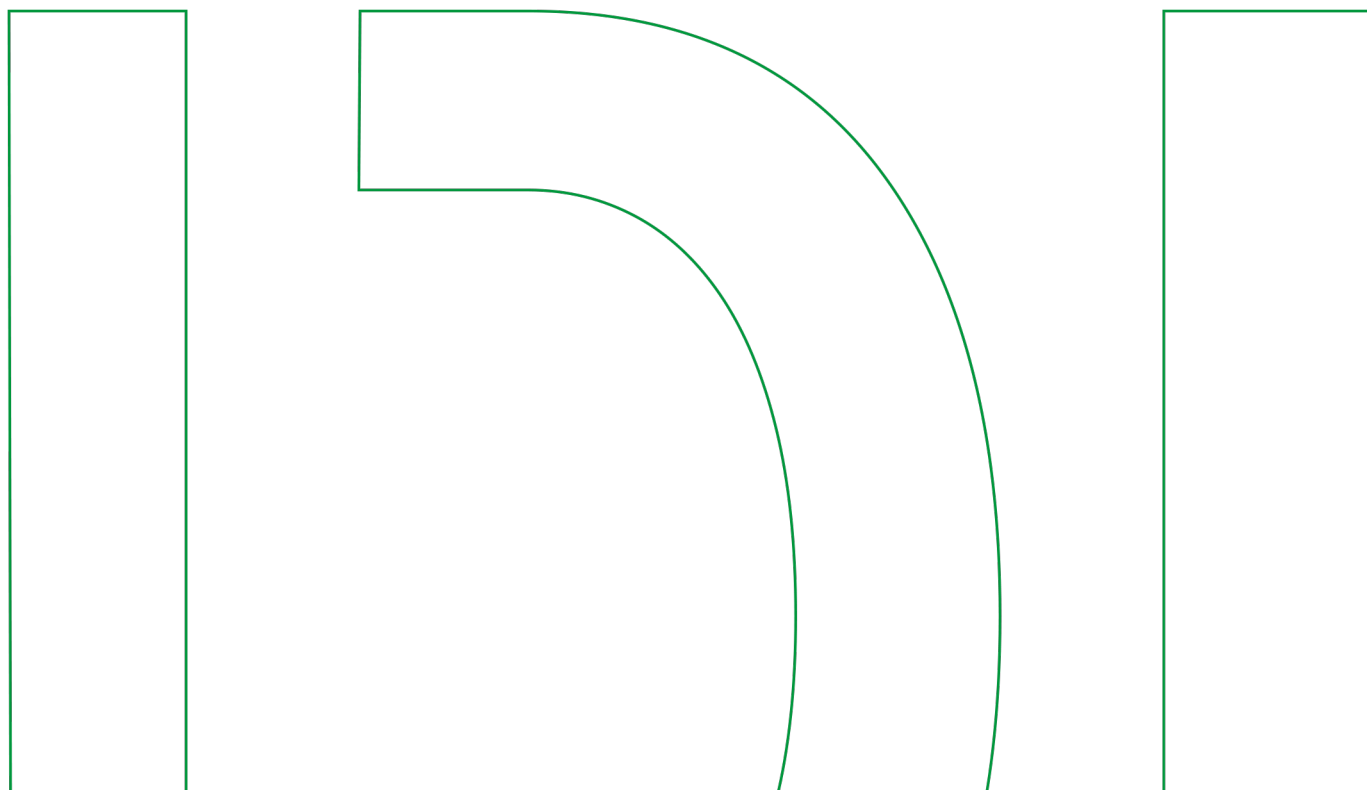

 KU SPOTOPTIK Ø 21,5X11,8 MM ABSTRAHLWINKEL 25° PMMA TRANSPARENT


Product number 7200-0021-1125-4727

Height 11.8mm
 Bayonet: Yes
 Surface and color: transparent
 Weight: 2,94g
 Outer diameter: 21,5mm
 beam angle: 25 degrees
 Material: Plastic

 KU SPOTOPTIK Ø 21,6X12 MM ABSTRAHLWINKEL 11X35° PMMA TRANSPARENT


Product number 7200-0021-1235-4727

Height 12mm
 Bayonet: Yes
 Surface and color: transparent
 Outer diameter: 21,6mm
 Weight: 2,7g
 beam angle: 35 degrees
 Material: Plastic

 KU SPOTOPTIK Ø 21X13,6 MM ABSTRAHLWINKEL 8° PMMA TRANSPARENT


Product number 7200-0021-1308-4727

Height 13.6mm
 Bayonet: Yes
 Surface and color: transparent
 Outer diameter: 21,0mm
 beam angle: 8 degrees
 Weight: 2,62g
 Material: Plastic

 KU SPOTOPTIK Ø 21X13,7 MM ABSTRAHLWINKEL 25° PMMA TRANSPARENT


Product number 7200-0021-1325-4727

Height 13.7mm
 Bayonet: Yes
 Surface and color: transparent
 Outer diameter: 21,0mm
 Weight: 2,67g
 beam angle: 25 degrees
 Material: Plastic

 KU SPOTOPTIK Ø 21X13,7 MM ABSTRAHLWINKEL 45° PMMA TRANSPARENT


Product number 7200-0021-1345-4727

Height 13.7mm
 Bayonet: Yes
 Surface and color: transparent
 Weight: 2,74g
 Outer diameter: 21,0mm
 beam angle: 45 degrees
 Material: Plastic

 KU KUGELOPTIK Ø30X13 MM ABSTRAHLWINKEL 60° PMMA OPAL WEISS


Product number 7200-0030-1360-4724

Height 13mm
 Outer diameter: 30,0mm
 beam angle: 60 degrees
 Weight: 4,32g
 Surface and color: opal-white
 Material: Plastic

 HALTER F. KU KUGELOPTIK Ø32X14 MM ÖFFNUNG F. LES 12MM PC WEISS


Product number 7200-0032-1412-1924

Height 14mm
 Outer diameter: 32,0mm
 Weight: 3,15g
 Material: PC
 Surface and color: white

 HALTER F. KU KUGELOPTIK Ø32X14 MM ÖFFNUNG F. LES 14,9MM PC WEISS


Product number 7200-0032-1414-1924

Height 14mm
 Outer diameter: 32,0mm
 Material: PC
 Weight: 3,5g
 Surface and color: white

KU SPOTOPTIK TWIST Ø 50X22 MM ABSTRAHLWINKEL 15° PMMA TRANSPARENT



Product number 7200-0050-2215-4727

Height 22mm
Bayonet: Yes
Surface and color: transparent
Weight: 22,95g
Outer diameter: 50,0mm
beam angle: 15 degrees
Material: Plastic

KU SPOTOPTIK TWIST Ø 50X22 MM ABSTRAHLWINKEL 24° PMMA TRANSPARENT



Product number 7200-0050-2224-4727

Height 22mm
Bayonet: Yes
Surface and color: transparent
Weight: 22,95g
Outer diameter: 50,0mm
beam angle: 24 degrees
Material: Plastic

KU SPOTOPTIK TWIST Ø 50X22 MM ABSTRAHLWINKEL 36° PMMA TRANSPARENT



Product number 7200-0050-2235-4727

Height 22mm
Bayonet: Yes
Surface and color: transparent
Weight: 22,95g
Outer diameter: 50,0mm
beam angle: 36 degrees
Material: Plastic

KU SPOTOPTIK TWIST Ø 50X22 MM ABSTRAHLWINKEL 60° PMMA TRANSPARENT



Product number 7200-0050-2260-4727

Height 22mm
Bayonet: Yes
Surface and color: transparent
Outer diameter: 50,0mm
Weight: 10g
beam angle: 60 degrees
Material: Plastic

KU SPOTOPTIK TWIST Ø 69X29,45 MM ABSTRAHLWINKEL 12° PMMA TRANSPARENT



Product number 7200-0069-2912-4727

Height 29.45mm
Bayonet: Yes
Surface and color: transparent
beam angle: 12 degrees
Outer diameter: 69,0mm
Weight: 52,68g
Material: Plastic

KU SPOTOPTIK TWIST Ø 69X29,45 MM ABSTRAHLWINKEL 24° PMMA TRANSPARENT



Product number 7200-0069-2924-4727

Height 29.45mm
Bayonet: Yes
Outer diameter: 69,0mm
Weight: 55,59g
beam angle: 24 degrees
Material: Plastic

KU SPOTOPTIK TWIST Ø 69X29,45 MM ABSTRAHLWINKEL 33° PMMA TRANSPARENT



Product number 7200-0069-2933-4727

Height 29.45mm
Bayonet: Yes
Weight: 58,8g
Outer diameter: 69,0mm
beam angle: 33 degrees
Material: Plastic

KU SPOTOPTIK TWIST Ø 69X29,45 MM ABSTRAHLWINKEL 36° PMMA TRANSPARENT



Product number 7200-0069-2936-4727

Height 29.45mm
Bayonet: Yes
Surface and color: transparent
Weight: 59,42g
Outer diameter: 69,0mm
beam angle: 36 degrees
Material: Plastic

KU SPOTOPTIK TWIST Ø 69X29,45 MM ABSTRAHLWINKEL 60° PMMA TRANSPARENT



Product number 7200-0069-2960-4727

Height 29.45mm
Bayonet: Yes
Surface and color: transparent
Outer diameter: 69,0mm
Weight: 33,26g
beam angle: 60 degrees
Material: Plastic

KU ADAPTER Ø 50X209 MM F. 50 MM SPOTOPTIKEN PC SCHWARZ



Product number 7902-0050-2000-4723

Clipable: yes
Surface and color: black
Outer diameter: 49,4mm
Diameter inside: 32,9mm
Weight: 4,53g
Material: Plastic

KU ADAPTER Ø 50X209 MM F. 50 MM SPOTOPTIKEN PC WEISS



Product number 7902-0050-2000-4724

Height 20.9mm
Bayonet: Yes
Outer diameter: 50,0mm
Weight: 4,55g
Diameter inside: 23,5mm
Surface and color: white
Material: Plastic

KU ADAPTER Ø 69X30 MM F. 69 MM SPOTOPTIKEN PC SCHWARZ



Product number 7902-0069-2800-4723

Height 30mm
Clipable: yes
Weight: 9,7g
Surface and color: black
Outer diameter: 69,0mm
Diameter inside: 33,0mm
Material: Plastic

KU ADAPTER Ø 69X285 MM F. 69 MM SPOTOPTIKEN PC WEISS



Product number 7902-0069-2800-4724

Height 285mm
Clipable: yes
Outer diameter: 69,0mm
Weight: 9,8g
Surface and color:white
Material: Plastic

KU SPOTOPTIK SHADOW Ø35X20,8 MM ABSTRAHLWINKEL 15° PMMA



Product number 7220-0035-2015-4727

Height 20.8mm
Clipable: yes
Surface and color: transparent
Outer diameter: 35,0mm
beam angle: 15 degrees
Weight: 9,71g
Material: Plastic

KU SPOTOPTIK SHADOW Ø35X20,8 MM ABSTRAHLWINKEL 24° PMMA



Product number 7220-0035-2024-4727

Height 20.8mm
Clipable: yes
Surface and color: transparent
Weight: 9,85g
Outer diameter: 35,0mm
beam angle: 24 degrees
Material: Plastic

KU SPOTOPTIK SHADOW Ø35X20,8 MM ABSTRAHLWINKEL 36° PMMA



Product number 7220-0035-2036-4727

Height 20.8mm
Clipable: yes
Surface and color: transparent
Weight: 9,69g
Outer diameter: 35,0mm
beam angle: 36 degrees
Material: Plastic

KU SPOTOPTIK SHADOW Ø55X32,8 MM ABSTRAHLWINKEL 15° PMMA



Product number 7220-0055-3215-4727

Height 32.8mm
Clipable: yes
Weight: 36,05g
Surface and color: transparent
beam angle: 15 degrees
Outer diameter: 55,0mm
Material: Plastic

KU SPOTOPTIK SHADOW Ø55X32,8 MM ABSTRAHLWINKEL 24° PMMA



Product number 7220-0055-3224-4727

Height 32.8mm
Clipable: yes
Surface and color: transparent
Weight: 36,32g
beam angle: 24 degrees
Outer diameter: 55,0mm
Material: Plastic

KU SPOTOPTIK SHADOW Ø55X32,8 MM ABSTRAHLWINKEL 36° PMMA



Product number 7220-0055-3236-4727

Height 32.8mm
Clipable: yes
Surface and color: transparent
Weight: 39,45g
beam angle: 36 degrees
Outer diameter: 55,0mm
Material: Plastic

KU SPOTOPTIK SHADOW Ø 69X40,8 MM ABSTRAHLWINKEL 15° PMMA



Product number 7220-0069-4015-4727

Height 40.8mm
Clipable: yes
Surface and color: transparent
beam angle: 15 degrees
Outer diameter: 69,0mm
Weight: 74,8g
Material: Plastic

KU SPOTOPTIK SHADOW Ø 69X40,8 MM ABSTRAHLWINKEL 24° PMMA



Product number 7220-0069-4024-4727

Height 40.8mm
Clipable: yes
Surface and color: transparent
Outer diameter: 69,0mm
Weight: 75,31g
beam angle: 24 degrees
Material: Plastic

KU SPOTOPTIK SHADOW Ø 69X40,8 MM ABSTRAHLWINKEL 36° PMMA



Product number 7220-0069-4036-4727

Height 40.8mm
Clipable: yes
Surface and color: transparent
Weight: 85,23g
Outer diameter: 69,0mm
beam angle: 36 degrees
Material: Plastic

KU OPTIKHALTER SHADOW Ø 35X21,2 MM FÜR COB CXA1304 PC SCHWARZ



Product number 7221-0035-1304-1923

Height 21.2mm
Screw-on: Yes
Clipable: yes
Weight: 3,21g
Outer diameter: 35,0mm
Surface and color: black
Material: Plastic

KU OPTIKHALTER SHADOW Ø 35X21,2 MM FÜR COB CXA1507 PC SCHWARZ



Product number 7221-0035-1507-1923

Height 21.2mm
Screw-on: Yes
Clipable: yes
Outer diameter: 35,0mm
Surface and color: black
Weight: 3,16g
Material: Plastic

KU OPTIKHALTER SHADOW Ø 55X34,5 MM FÜR COB CXA1830 PC SCHWARZ



Product number 7221-5534-1830-1923

Height 34.5mm
Screw-on: Yes
Clipable: yes
Weight: 10g
Surface and color: black
Outer diameter: 55,0mm
Material: Plastic

KU OPTIKHALTER SHADOW Ø 55X34,5 MM FÜR COB 1919 PC SCHWARZ



Product number 7221-5534-1919-1923

Height 34.5mm
Screw-on: Yes
Clipable: yes
Weight: 10,1g
Surface and color:black
Outer diameter: 55,0mm
Material: Plastic

KU OPTIKHALTER SHADOW Ø 69X42,57 MM FÜR COB CXA1830 PC SCHWARZ



Product number 7221-6942-1830-1923

Height 42.57mm
Screw-on: Yes
Weight: 14,91g
Surface and color:black
Outer diameter: 69,0mm
Material: Plastic

KU OPTIKHALTER SHADOW Ø69X42,57 MM FÜR COB CXA1919 PC SCHWARZ



Product number 7221-6942-1919-1923

Height 42.57mm
Screw-on: Yes
Surface and color:black
Outer diameter: 69,0mm
Weight: 15,55g
Material: Plastic

KU DESIGNBLENDE SHADOW UGR REDUZIEREND Ø50X15,6 MM F. Ø35MM SPOTOPTIK PC CHROM



Product number 7222-0050-1500-1902

Height 15.6mm
Clipable: yes
Surface and color:chrome plated
Outer diameter: 50,0mm
Diameter inside: 35,0mm
Weight: 4,04g
Material: Plastic

KU DESIGNBLENDE SHADOW UGR REDUZIEREND Ø50X15,6 MM F. Ø35MM SPOTOPTIK PC PLATIN CHROM



Product number 7222-0050-1500-1917

Height: 15.6mm
Clipable: yes
Outer diameter: 50,0mm
Diameter inside: 35,0mm
Weight: 3,95g
Surface and color: platin-chrom
Material: Plastic

KU DESIGNBLENDE SHADOW UGR REDUZIEREND Ø50X15,6 MM F. Ø35MM SPOTOPTIK PC WEISS



Product number 7222-0050-1500-1924

Height: 15.6mm
Clipable: yes
Outer diameter: 50,0mm
Weight: 4g
Diameter inside: 35,0mm
Surface and color: white
Material: Plastic

KU DESIGNBLENDE SHADOW UGR REDUZIEREND Ø81,4X25 MM F. Ø55MM SPOTOPTIK PC SCHWARZ CHROM



Product number 7222-0081-2500-1916

Height: 25mm
Clipable: yes
Weight: 15,21g
Surface and color: schwarz-chrom
Outer diameter: 81,4mm
Diameter inside: 55,0mm
Material: Plastic

KU DESIGNBLENDE SHADOW UGR REDUZIEREND Ø81,4X25 MM F. Ø55MM SPOTOPTIK PC PLATIN CHROM



Product number 7222-0081-2500-1917

Height: 25mm
Clipable: yes
Weight: 14,6g
Outer diameter: 81,4mm
Surface and color: velours-chrome
Diameter inside: 55,0mm
Material: Plastic

KU DESIGNBLENDE SHADOW UGR REDUZIEREND Ø81,4X25 MM F. Ø55MM SPOTOPTIK PC WEISS



Product number 7222-0081-2500-1924

Height 25mm
Clipable: yes
Weight: 14,78g
Outer diameter: 81,4mm
Diameter inside: 55,0mm
Surface and color:white
Material: Plastic

KU DESIGNBLENDE SHADOW UGR REDUZIEREND Ø102X31,3 MM F. Ø69MM SPOTOPTIK PC CHROM



Product number 7222-0102-3100-1902

Height 31.3mm
Clipable: yes
Surface and color:chrome plated
Weight: 31g
Outer diameter: 102,0mm
Diameter inside: 69,0mm
Material: Plastic

KU DESIGNBLENDE SHADOW UGR REDUZIEREND Ø102X31,3 MM F. Ø69MM SPOTOPTIK PC SCHWARZ CHROM



Product number 7222-0102-3100-1916

Height 31.3mm
Clipable: yes
Surface and color:schwarz-chrom
Weight: 31,25g
Outer diameter: 102,0mm
Diameter inside: 69,0mm
Material: Plastic

KU DESIGNBLENDE SHADOW UGR REDUZIEREND Ø102X31,3 MM F. Ø69MM SPOTOPTIK PC PLATIN CHROM



Product number 7222-0102-3100-1917


Height 31.3mm
Clipable: yes
Surface and color:schwarz-chrom
Weight: 31,3g
Outer diameter: 102,0mm
Diameter inside: 69,0mm
Material: Plastic

KU ZOOMOPTIK TWIST Ø35 MM ABSTRAHLWINKEL EINSTELLBAR 20°, 36° UND 48°



Product number 7290-0034-2048-4727
Height 13mm
Surface and color:transparent
Weight: 9,35g
Outer diameter: 35,0mm
Material: Plastic

KU ZOOMOPTIK TWIST Ø45 MM ABSTRAHLWINKEL EINSTELLBAR 20°, 36° UND 48°

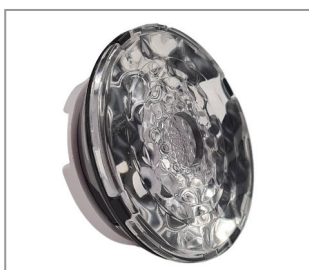

Product number 7290-0045-2048-4727
Height 16mm
Surface and color:transparent
Outer diameter: 45,0mm
Weight: 17,05g
Material: Plastic

KU ZOOMOPTIK TWIST Ø50 H18 MM ABSTRAHLWINKEL EINSTELLBAR 20°, 36° UND 48°



Product number 7290-1845-2048-4727
Height 18mm
Surface and color:transparent
Outer diameter: 50,0mm
Weight: 23,25g
Material: Plastic

KU ZOOMOPTIK TWIST Ø70 H21 MM ABSTRAHLWINKEL EINSTELLBAR 20°, 36° UND 48°



Product number 7290-2170-2048-4727
Height 21mm
Surface and color:transparent
Outer diameter: 70,0mm
Weight: 52,7g
Material: Plastic

KU ZOOMOPTIK TWIST Ø45 H25 MM ABSTRAHLWINKEL EINSTELLBAR 20°, 36° UND 48°

**Product number 7290-2545-2048-4727**

Height 25mm
Surface and color: transparent
Weight: 29,6g
Outer diameter: 45,0mm
Material: Plastic

KU ZOOMOPTIK TWIST Ø90 H35 MM ABSTRAHLWINKEL EINSTELLBAR 20°, 36° UND 48°

**Product number 7290-3590-2048-4727**

Height 35mm
Surface and color: transparent
Outer diameter: 90,0mm
Weight: 135,75g
Material: Plastic

 SILIKONOPTIK 32X28X10MM - ABSTRAHLWINKEL 146X88° TRANSPARENT


Product number 7250-3228-1468-8527

Height 10mm
 Width 28mm
 Länge: 32mm
 Surface and color: transparent
 Weight: 2,85g
 Material: Silicon
 beam angle: 146Grad

 SILIKONOPTIK 32X28X10MM - ABSTRAHLWINKEL 153X75° TRANSPARENT


Product number 7250-3228-1537-8527

Height 10mm
 Width 28mm
 Länge: 32mm
 Surface and color: transparent
 Material: Silicon
 Weight: 3g
 beam angle: 153Grad

 SILIKONOPTIK 35X35X12MM - ABSTRAHLWINKEL 100° F. COB 17X17MM TRANSPARENT


Product number 7250-3535-0100-8527

Height 12mm
 Width 35mm
 Länge: 35mm
 Weight: 6,1g
 Surface and color: transparent
 Material: Silicon
 beam angle: 100Grad

 SILIKONOPTIK 35X35X17MM - ABSTRAHLWINKEL 130X90° F. COB 17X17MM TRANSPARENT


Product number 7250-3535-1309-8527

Height 17mm
 Width 35mm
 Länge: 35mm
 Surface and color: transparent
 Weight: 6,85g
 beam angle: 130Grad
 Material: Silicon

SILIKONOPTIK 78X67X23MM INKL. HALTER120X60° TRANSPARENT

**Product number** 7250-7867-2360-8527

Height 23mm
Width 67mm
Länge: 78mm
Surface and color: transparent
Weight: 50,4g
Material: Silicon
beam angle: 120 degrees

 KU MULTI-LINSENOPTIK 12IN1 49,89X49,89X7,25 MM 15° ABSTRAHLWINKEL PC TRANSPARENT


Product number 7300-0050-0015-4712

Height 7,25mm
 Width 49,89mm
 Länge: 49,89mm
 Screw-on: Yes
 Surface and color: transparent
 beam angle: 15 degrees
 Weight: 11,4g
 Material: Plastic

 KU MULTI-LINSENOPTIK 12IN1 49,89X49,89X7,39 MM 30° ABSTRAHLWINKEL PC TRANSPARENT


Product number 7300-0050-0030-4712

Height 7,39mm
 Width 49,89mm
 Länge: 49,89mm
 Screw-on: Yes
 Surface and color: transparent
 beam angle: 30 degrees
 Weight: 11,62g
 Material: Plastic

 KU MULTI-LINSENOPTIK 12IN1 49,89X49,89X7,4 MM 60° ABSTRAHLWINKEL PC TRANSPARENT


Product number 7300-0050-0060-4712

Height 7,4mm
 Width 49,89mm
 Länge: 49,89mm
 Screw-on: Yes
 Surface and color: transparent
 Weight: 5g
 beam angle: 60 degrees
 Material: Plastic

 KU MULTI-LINSENOPTIK 12IN1 49,89X49,89X7,12 MM 90° ABSTRAHLWINKEL PC TRANSPARENT


Product number 7300-0050-0090-4712

Height 7,12mm
 Width 49,89mm
 Länge: 49,89mm
 Screw-on: Yes
 Surface and color: transparent
 beam angle: 90 degrees
 Weight: 6,76g
 Material: Plastic

 KU MULTI-LINSENOPTIK 12IN1 49,89X49,89X4,48 MM IESNA S PC TRANSPARENT


Product number 7300-0050-0100-5912

Height 4.48mm
 Width 49.89mm
 Länge: 49,89mm
 Screw-on: Yes
 Surface and color: transparent
 Weight: 5,53g
 Material: Plastic

 KU MULTI-LINSENOPTIK 12IN1 49,89X49,89X4,68 MM IESNA I S PC TRANSPARENT


Product number 7300-0050-1100-5912

Height 4.68mm
 Width 49.89mm
 Länge: 49,89mm
 Screw-on: Yes
 Surface and color: transparent
 Weight: 6,28g
 Material: Plastic

 KU MULTI-LINSENOPTIK 12IN1 49,89X49,89X5,38 MM IESNA II S PC TRANSPARENT


Product number 7300-0050-2100-5912

Height 5.38mm
 Width 49.89mm
 Länge: 49,89mm
 Screw-on: Yes
 Surface and color: transparent
 Weight: 8,15g
 Material: Plastic

 KU MULTI-LINSENOPTIK 12IN1 49,89X49,89X4,14 MM IESNA II M PC TRANSPARENT


Product number 7300-0050-2200-5912

Height 4.14mm
 Width 49.89mm
 Länge: 49,89mm
 Screw-on: Yes
 Surface and color: transparent
 Weight: 5,48g
 Material: Plastic

 KU MULTI-LINSENOPTIK 25IN1 75X75X9,4 MM 30° ABSTRAHLWINKEL PMMA TRANSPARENT


Product number 7300-7575-0030-4727

Height 9,4mm
 Width 75mm
 Länge: 75mm
 Screw-on: Yes
 Surface and color: transparent
 Weight: 30,44g
 beam angle: 30 degrees
 Material: Plastic

 KU IP OPTIK 24IN1 135X100X9 MM ABSTRAHLWINKEL 60° PC TRANSPARENT INKL. SILIKONDICHTUNG


Product number 7310-0135-0060-1924

Height 9mm
 Width 100mm
 Länge: 135mm
 Screw-on: Yes
 beam angle: 60 degrees
 Weight: 58,87g
 IP Schutzart: IP66
 Material: Plastic

 KU IP OPTIK 24IN1 135X100X9 MM ABSTRAHLWINKEL 90° PC TRANSPARENT INKL. SILIKONDICHTUNG


Product number 7310-0135-0090-1924

Height 9mm
 Width 100mm
 Länge: 135mm
 Screw-on: Yes
 Weight: 52,97g
 beam angle: 90 degrees
 IP Schutzart: IP66
 Material: Plastic

 KU IP OPTIK 24IN1 135X100X9 MM ABSTRAHLWINKEL IESNA II M PC TRANSPARENT INKL. SILIKONDICHTUNG


Product number 7310-0135-2200-1924

Height 9mm
 Width 100mm
 Länge: 135mm
 Screw-on: Yes
 Weight: 64,09g
 IP Schutzart: IP66
 Material: Plastic

KU IP OPTIK 24IN1 135X100X9 MM ABSTRAHLWINKEL 30X90° PC TRANSPARENT INKL. SILIKONDICHTUNG


Product number 7310-0135-3090-1924

Height 9mm
 Width 100mm
 Länge: 135mm
 Screw-on: Yes
 beam angle: 90 degrees
 Weight: 86,97g
 IP Schutzart: IP66
 Material: Plastic

KU IP OPTIK 46IN1 286X116X40,4 MM PC TRANSPARENT INKL. SILIKONOPTIK


Product number 7315-0286-0000-1946

Height 40.4mm
 Width 116mm
 Länge: 286mm
 Screw-on: Yes
 Surface and color: transparent
 Weight: 170,15g
 IP Schutzart: IP67
 Material: PC

KU IP MULTI-LINSENOPTIK 46IN1 286X116X16,1MM 8° ABSTRAHLWINKEL PC TRANSPARENT INKL. SILIKONDICHTUNG


Product number 7315-0286-0008-1946

Height 16.1mm
 Width 116mm
 Länge: 286mm
 Screw-on: Yes
 Weight: 221,5g
 beam angle: 8 degrees
 IP Schutzart: IP66
 Material: Plastic

KU IP MULTI-LINSENOPTIK 46IN1 286X116X13,6MM 20° ABSTRAHLWINKEL PC TRANSPARENT INKL. SILIKONDICHTUNG


Product number 7315-0286-0020-1946

Height 13.6mm
 Width 116mm
 Länge: 286mm
 Screw-on: Yes
 beam angle: 20Grad
 Weight: 200,34g
 IP Schutzart: IP66
 Material: Plastic

KU IP MULTI-LINSENOPTIK 46IN1 286X116X13,6MM 40° ABSTRAHLWINKEL PC TRANSPARENT INKL. SILIKONDICHTUNG

Product number 7315-0286-0040-1946

Height 13.6mm
 Width 116mm
 Länge: 286mm
 Screw-on: Yes
 beam angle: 40 degrees
 Weight: 202,63g
 IP Schutzart: IP66
 Material: Plastic

KU IP MULTI-LINSENOPTIK 46IN1 286X116X11,6MM ABSTRAHLWINKEL 50°EINFACH ASSYMETRISCH PC TRANSPARENT INKL. SILIKONDICHTUNG

Product number 7315-0286-0050-1946

Height 11.6mm
 Width 116mm
 Länge: 286mm
 Screw-on: Yes
 beam angle: 50Grad
 Weight: 155,57g
 IP Schutzart: IP66
 Material: Plastic

KU IP MULTI-LINSENOPTIK 46IN1 286X116X11,6MM 60° ABSTRAHLWINKEL PC TRANSPARENT INKL. SILIKONDICHTUNG

Product number 7315-0286-0060-1946

Height 11.6mm
 Width 116mm
 Länge: 286mm
 Screw-on: Yes
 Weight: 173,46g
 beam angle: 60 degrees
 IP Schutzart: IP66
 Material: Plastic

KU IP MULTI-LINSENOPTIK 46IN1 286X116X11,6MM 90° ABSTRAHLWINKEL PC TRANSPARENT INKL. SILIKONDICHTUNG

Product number 7315-0286-0090-1946

Height 11.6mm
 Width 116mm
 Länge: 286mm
 Screw-on: Yes
 beam angle: 90 degrees
 Weight: 154,5g
 IP Schutzart: IP66
 Material: Plastic

KU IP MULTI-LINSENOPTIK 46IN1 286X116X11,6MM ABSTRAHLWINKEL IESNA TYP IV PC TRANSPARENT INKL. SILIKONDICHTUNG

Product number 7315-0286-4000-1946

Height 11.6mm
 Width 116mm
 Länge: 286mm
 Screw-on: Yes
 Weight: 176,92g
 IP Schutzart: IP66
 Material: Plastic

KU IP MULTI-LINSENOPTIK 84IN1 252X70X10,6MM ABSTRAHLWINKEL 15° PC TRANSPARENT INKL. SILIKONDICHTUNG

Product number 7320-0252-0015-1984

Height 10.6mm
 Width 70mm
 Länge: 252mm
 Screw-on: Yes
 beam angle: 15 degrees
 Weight: 100,4g
 IP Schutzart: IP66
 Material: Plastic

KU IP MULTI-LINSENOPTIK 84IN1 252X70X10,6MM ABSTRAHLWINKEL 25° PC TRANSPARENT INKL. SILIKONDICHTUNG


Product number 7320-0252-0025-1984

Height 10.6mm
 Width 70mm
 Länge: 252mm
 Screw-on: Yes
 Weight: 107,63g
 beam angle: 25 degrees
 IP Schutzart: IP66
 Material: Plastic

KU IP MULTI-LINSENOPTIK 84IN1 252X70X7,64MM ABSTRAHLWINKEL 30° PC TRANSPARENT INKL. SILIKONDICHTUNG

Product number 7320-0252-0030-1984

Height 7.64mm
 Width 70mm
 Länge: 252mm
 Screw-on: Yes
 beam angle: 30 degrees
 IP Schutzart: IP66
 Weight: 87,52g
 Material: Plastic


KU IP MULTI-LINSENOPTIK 84IN1 252X70X10,6MM ABSTRAHLWINKEL 40° PC TRANSPARENT INKL. SILIKONDICHTUNG

Product number 7320-0252-0040-1984

Height: 10.6mm
 Width: 70mm
 Länge: 252mm
 Screw-on: Yes
 beam angle: 40 degrees
 Weight: 98,53g
 IP Schutzart: IP66
 Material: Plastic

KU IP MULTI-LINSENOPTIK 84IN1 252X70X7,64MM ABSTRAHLWINKEL 60° PC TRANSPARENT INKL. SILIKONDICHTUNG

Product number 7320-0252-0060-1984

Height: 7.64mm
 Width: 70mm
 Länge: 252mm
 Screw-on: Yes
 Weight: 69,13g
 beam angle: 60 degrees
 IP Schutzart: IP66
 Material: Plastic

KU IP MULTI-LINSENOPTIK 84IN1 252X70X5,2MM ABSTRAHLWINKEL 75° PC TRANSPARENT INKL. SILIKONDICHTUNG

Product number 7320-0252-0075-1984

Height: 5.2mm
 Width: 70mm
 Länge: 252mm
 Screw-on: Yes
 Weight: 62,3g
 beam angle: 75Grad
 IP Schutzart: IP66
 Material: Plastic

KU IP MULTI-LINSENOPTIK 84IN1 252X70X6,7MM ABSTRAHLWINKEL 90° PC TRANSPARENT INKL. SILIKONDICHTUNG

Product number 7320-0252-0090-1984

Height: 6.7mm
 Width: 70mm
 Länge: 252mm
 Screw-on: Yes
 beam angle: 90 degrees
 Weight: 70,57g
 IP Schutzart: IP66
 Material: Plastic

KU IP MULTI-LINSENOPTIK 84IN1 252X70X6,35MM ABSTRAHLWINKEL 120° PC TRANSPARENT INKL. SILIKONDICHTUNG

Product number 7320-0252-0120-1984

Height 6.35mm
 Width 70mm
 Länge: 252mm
 Screw-on: Yes
 Weight: 66,18g
 beam angle: 120 degrees
 IP Schutzart: IP66
 Material: Plastic

KU IP MULTI-LINSENOPTIK 84IN1 252X70X6,7MM ABSTRAHLWINKEL IESNA TYP II S PC TRANSPARENT INKL. SILIKONDICHTUNG

Product number 7320-0252-2100-1984

Height 6.7mm
 Width 70mm
 Länge: 252mm
 Screw-on: Yes
 Weight: 67,73g
 IP Schutzart: IP66
 Material: Plastic

KU IP MULTI-LINSENOPTIK 84IN1 252X70X6,7MM ABSTRAHLWINKEL IESNA TYP III S PC TRANSPARENT INKL. SILIKONDICHTUNG

Product number 7320-0252-3100-1984

Height 6.7mm
 Width 70mm
 Länge: 252mm
 Screw-on: Yes
 Weight: 80,55g
 IP Schutzart: IP66
 Material: Plastic

KU IP MULTI-LINSENOPTIK 84IN1 252X70X7,64MM ABSTRAHLWINKEL IESNA TYP IV S PC TRANSPARENT INKL. SILIKONDICHTUNG

Product number 7320-0252-4000-1984

Height 7.64mm
 Width 70mm
 Länge: 252mm
 Screw-on: Yes
 Weight: 75g
 IP Schutzart: IP66
 Material: Plastic

 KU MULTI-LINSENOPTIK 2X2 49,9X49,9X12 XMM ABSTRAHLWINKEL 20° PC TRANSPARENT


Product number 7325-5050-0020-1904

Height 9.12mm
 Width 49.9mm
 Länge: 49,9mm
 Surface and color: transparent
 beam angle: 20Grad
 Weight: 13,8g
 Material: Plastic

 KU MULTI-LINSENOPTIK 16IN1 50X50X7,35MM ABSTRAHLWINKEL 20° PC TRANSPARENT


Product number 7325-5050-0020-1916

Height 7.35mm
 Width 50mm
 Länge: 50mm
 Screw-on: Yes
 Surface and color: transparent
 beam angle: 20Grad
 Weight: 9,56g
 Material: Plastic

 KU MULTI-LINSENOPTIK 2X2 50,28X50,28X12,14MM ABSTRAHLWINKEL 30° PC TRANSPARENT


Product number 7325-5050-0030-1904

Height 12.14mm
 Width 50.28mm
 Länge: 50,28mm
 Screw-on: Yes
 Surface and color: transparent
 Weight: 17,06g
 beam angle: 30 degrees
 Material: Plastic

 KU MULTI-LINSENOPTIK 6IN1 49,8X49,8X8,22MM ABSTRAHLWINKEL 30° PC TRANSPARENT


Product number 7325-5050-0030-1906

Height 8.22mm
 Width 49.8mm
 Länge: 49,8mm
 Screw-on: Yes
 Weight: 9,86g
 beam angle: 30 degrees
 Material: Plastic

 KU MULTI-LINSENOPTIK 8IN1 49,5X49,5X8,22MM ABSTRAHLWINKEL 30° PC TRANSPARENT


Product number 7325-5050-0030-1908

Height 8.22mm
 Width 49.5mm
 Länge: 49,5mm
 Screw-on: Yes
 Weight: 10,66g
 beam angle: 30 degrees
 Material: Plastic

 KU MULTI-LINSENOPTIK 24IN1 50X50X5,2 MM ABSTRAHLWINKEL 30° PC TRANSPARENT


Product number 7325-5050-0030-1924

Height 5.2mm
 Width 50mm
 Länge: 50mm
 Screw-on: Yes
 Surface and color: transparent
 beam angle: 30 degrees
 Weight: 7,67g
 Material: Plastic

 KU MULTI-LINSENOPTIK 24IN1 50X50X6 MM ABSTRAHLWINKEL 40° PC TRANSPARENT


Product number 7325-5050-0040-1924

Height 6mm
 Width 50mm
 Länge: 50mm
 Screw-on: Yes
 Surface and color: transparent
 beam angle: 40 degrees
 Weight: 8,72g
 Material: Plastic

 KU MULTI-LINSENOPTIK 16IN1 50X50X7MM ABSTRAHLWINKEL 45° PC TRANSPARENT


Product number 7325-5050-0045-1916

Height 7mm
 Width 50mm
 Länge: 50mm
 Screw-on: Yes
 Surface and color: transparent
 beam angle: 45 degrees
 Weight: 8,33g
 Material: Plastic

KU MULTI-LINSENOPTIK 16IN1 50X50X5,3MM ABSTRAHLWINKEL 50° EINFACH ASSYMETRISCH PC TRANSPARENT

Product number 7325-5050-0050-1916

Height 5.3mm
 Width 50mm
 Länge: 50mm
 Screw-on: Yes
 Surface and color: transparent
 Weight: 7,16g
 beam angle: 50Grad
 Material: Plastic

KU MULTI-LINSENOPTIK 2X2 49,89X49,89X8,6MM ABSTRAHLWINKEL 60° PC TRANSPARENT

Product number 7325-5050-0060-1904

Height 8.6mm
 Width 49.89mm
 Länge: 49,89mm
 Screw-on: Yes
 Surface and color: transparent
 Weight: 8,96g
 beam angle: 60 degrees
 Material: Plastic

KU MULTI-LINSENOPTIK 6IN1 49,8X49,8X7,5MM ABSTRAHLWINKEL 60° PC TRANSPARENT

Product number 7325-5050-0060-1906

Height 7.5mm
 Width 49.8mm
 Länge: 49,8mm
 Screw-on: Yes
 Surface and color: transparent
 beam angle: 60 degrees
 Weight: 7,08g
 Material: Plastic

KU MULTI-LINSENOPTIK 8IN1 49,5X49,5X7,5MM ABSTRAHLWINKEL 60° PC TRANSPARENT

Product number 7325-5050-0060-1908

Height 7.5mm
 Width 49.5mm
 Länge: 49,5mm
 Screw-on: Yes
 Surface and color: transparent
 Weight: 7,64g
 beam angle: 60 degrees
 Material: Plastic

 KU MULTI-LINSENOPTIK 16IN1 50X50X5,3MM ABSTRAHLWINKEL 60° PC TRANSPARENT


Product number 7325-5050-0060-1916

Height 5.3mm
 Width 50mm
 Länge: 50mm
 Screw-on: Yes
 Surface and color: transparent
 beam angle: 60 degrees
 Weight: 5,27g
 Material: Plastic

 KU MULTI-LINSENOPTIK 24IN1 50X50X5,2 MM ABSTRAHLWINKEL 60° PC TRANSPARENT


Product number 7325-5050-0060-1924

Height 5.2mm
 Width 50mm
 Länge: 50mm
 Screw-on: Yes
 Weight: 5,53g
 beam angle: 60 degrees
 Material: Plastic

 KU MULTI-LINSENOPTIK 6IN1 49,8X49,8X7,5MM ABSTRAHLWINKEL 60° PC AMBER


Product number 7325-5050-0060-1934

Height 7.5mm
 Width 49.8mm
 Länge: 49,8mm
 Weight: 6,85g
 Surface and color: amber
 beam angle: 60 degrees
 Material: Plastic

 KU MULTI-LINSENOPTIK 2X2 50X50X7,81 MM ABSTRAHLWINKEL 90° PC TRANSPARENT


Product number 7325-5050-0090-1904

Height 7.81mm
 Width 50mm
 Länge: 50mm
 Screw-on: Yes
 Surface and color: transparent
 beam angle: 90 degrees
 Weight: 7,57g
 Material: Plastic

 KU MULTI-LINSENOPTIK 6IN1 49,8X49,8X7,5MM ABSTRAHLWINKEL 90° PC TRANSPARENT


Product number 7325-5050-0090-1906

Height 8.75mm
 Width 49.8mm
 Länge: 49,8mm
 Screw-on: Yes
 Surface and color: transparent
 beam angle: 90 degrees
 Weight: 5,69g
 Material: Plastic

 KU MULTI-LINSENOPTIK 8IN1 49,5X49,5X5,8MM ABSTRAHLWINKEL 90° PC TRANSPARENT


Product number 7325-5050-0090-1908

Height 5.8mm
 Width 49.5mm
 Länge: 49,5mm
 Screw-on: Yes
 beam angle: 90 degrees
 Weight: 6,35g
 Material: Plastic

 KU MULTI-LINSENOPTIK 16IN1 50X50X5MM ABSTRAHLWINKEL 90° PC TRANSPARENT


Product number 7325-5050-0090-1916

Height 5mm
 Width 50mm
 Länge: 50mm
 Screw-on: Yes
 Surface and color: transparent
 beam angle: 90 degrees
 Weight: 4,7g
 Material: Plastic

 KU MULTI-LINSENOPTIK 24IN1 50X50X3,5 MM ABSTRAHLWINKEL 90° PC TRANSPARENT


Product number 7325-5050-0090-1924

Height 3.5mm
 Width 50mm
 Länge: 50mm
 Screw-on: Yes
 beam angle: 90 degrees
 Weight: 4,76g
 Material: Plastic

 KU MULTI-LINSENOPTIK 8IN1 49,5X49,5X5,8MM ABSTRAHLWINKEL 114° PC TRANSPARENT


Product number 7325-5050-0114-1908

Height 5.8mm
 Width 49.5mm
 Länge: 49,5mm
 Screw-on: Yes
 Weight: 6,68g
 beam angle: 114Grad
 Material: Plastic

 KU MULTI-LINSENOPTIK 2X2 49,89X49,89X8,48 MM ABSTRAHLWINKEL IESNA II S PC TRANSPARENT


Product number 7325-5050-2100-1904

Height 8.48mm
 Width 49.89mm
 Länge: 49,89mm
 Screw-on: Yes
 Surface and color: transparent
 Weight: 9,16g
 Material: Plastic

 KU MULTI-LINSENOPTIK 6IN1 49,8X49,8X8,5MM ABSTRAHLWINKEL IESNA II S PC TRANSPARENT


Product number 7325-5050-2100-1906

Height 8.5mm
 Width 49.8mm
 Länge: 49,8mm
 Screw-on: Yes
 Weight: 10,83g
 Material: Plastic

 KU MULTI-LINSENOPTIK 8IN1 49,5X49,5X5,31MM ABSTRAHLWINKEL IESNA II S PC TRANSPARENT


Product number 7325-5050-2100-1908

Height 5.31mm
 Width 49.5mm
 Länge: 49,5mm
 Screw-on: Yes
 Weight: 5,84g
 Material: Plastic

 KU MULTI-LINSENOPTIK 16IN1 50X50X4,25 MM ABSTRAHLWINKEL IESNA II S PC TRANSPARENT


Product number 7325-5050-2100-1916

Height 4.25mm
 Width 50mm
 Länge: 50mm
 Screw-on: Yes
 Surface and color: transparent
 Weight: 5,62g
 Material: Plastic

 KU MULTI-LINSENOPTIK 24IN1 50X50X3,95 MM ABSTRAHLWINKEL IESNA II S PC TRANSPARENT


Product number 7325-5050-2100-1924

Height 3.95mm
 Width 50mm
 Länge: 50mm
 Screw-on: Yes
 Weight: 6,06g
 Material: Plastic

 KU MULTI-LINSENOPTIK 2X2 49,89X49,89X7,3 MM ABSTRAHLWINKEL IESNA II M PC TRANSPARENT


Product number 7325-5050-2200-1904

Height 7.3mm
 Width 49.89mm
 Länge: 49,89mm
 Screw-on: Yes
 Surface and color: transparent
 Weight: 9,54g
 Material: Plastic

 KU MULTI-LINSENOPTIK 6IN1 49,8X49,8X7,32MM ABSTRAHLWINKEL IESNA II M PC TRANSPARENT


Product number 7325-5050-2200-1906

Height 7.32mm
 Width 49.8mm
 Länge: 49,8mm
 Screw-on: Yes
 Weight: 10,66g
 Material: Plastic

 KU MULTI-LINSENOPTIK 8IN1 49,8X49,6X5,95MM ABSTRAHLWINKEL IESNA II M PC TRANSPARENT



Product number	7325-5050-2200-1908
Height	5.95mm
Width	49.6mm
Länge:	49,8mm
Screw-on:	Yes
Weight:	7,2g
Material:	Plastic

 KU MULTI-LINSENOPTIK 6IN1 49,8X49,8X8,5MM ABSTRAHLWINKEL IESNA II M PC AMBER



Product number	7325-5050-2200-1934
Height	8.5mm
Width	49.8mm
Länge:	49,8mm
Surface and color:	amber
Weight:	10,65g
Material:	Plastic

 KU MULTI-LINSENOPTIK 2X2 49,89X49,89X8,24 MM ABSTRAHLWINKEL IESNA III S PC TRANSPARENT



Product number	7325-5050-3100-1904
Height	8.24mm
Width	49.89mm
Länge:	49,89mm
Screw-on:	Yes
Surface and color:	transparent
Weight:	12,1g
Material:	Plastic

 KU MULTI-LINSENOPTIK 8IN1 49,5X49,5X5,27MM ABSTRAHLWINKEL IESNA III S PC TRANSPARENT



Product number	7325-5050-3100-1908
Height	5.22mm
Width	49.5mm
Länge:	49,5mm
Screw-on:	Yes
Weight:	6,38g
Material:	Plastic

 KU MULTI-LINSENOPTIK 6IN1 49,8X49,8X6,85MM ABSTRAHLWINKEL IESNA III M PC TRANSPARENT


Product number 7325-5050-3200-1906

Height 6.85mm
 Width 49.8mm
 Länge: 49,8mm
 Screw-on: Yes
 Weight: 10,07g
 Material: Plastic

 KU MULTI-LINSENOPTIK 16IN1 50X50X4,25 MM ABSTRAHLWINKEL IESNA III M PC TRANSPARENT


Product number 7325-5050-3200-1916

Height 4.25mm
 Width 50mm
 Länge: 50mm
 Screw-on: Yes
 Surface and color: transparent
 Weight: 7,8g
 Material: Plastic

 KU MULTI-LINSENOPTIK 16IN1 50X50X4,8MM ABSTRAHLWINKEL IESNA V PC TRANSPARENT


Product number 7325-5050-5000-1916

Height 4.8mm
 Width 50mm
 Länge: 50mm
 Screw-on: Yes
 Weight: 8,2g
 Material: Plastic

 KU MULTI-LINSENOPTIK 2X2 49,89X49,89X8,24 MM ABSTRAHLWINKEL IESNA V QUADRATISCH PC TRANSPARENT


Product number 7325-5050-5100-1904

Height 8.24mm
 Width 49.89mm
 Länge: 49,89mm
 Surface and color: transparent
 Weight: 7,1g
 Material: Plastic

**KU MULTI-LINSENOPTIK 2X2 49,9X49,9X12MM ABSTRAHLWINKEL 50° EINFACH ASYMMETRISC HPC
 TRANSPARENT**

Product number 7325-5050-SA50-1904

Height 12mm IP Schutzart: IP20
 Width 49.9mm
 Länge: 49,9mm
 Screw-on: Yes
 Surface and color: transparent
 beam angle: 50Grad
 Material: PC
 Weight: 11,55g

**KU IP MULTI-LINSENOPTIK 12IN1 173X71,4X9,08MM ABSTRAHLWINKEL 30° PC TRANSPARENT INKL.
 DICHTUNG**

Product number 7330-0173-0030-1912

Height 9.08mm
 Width 71.4mm
 Länge: 173mm
 Surface and color: transparent
 Material: PC
 Weight: 50g

**KU IP MULTI-LINSENOPTIK 12IN1 173X71,4X10,4MM ABSTRAHLWINKEL 60° PC TRANSPARENT INKL.
 SILIKONDICHTUNG**

Product number 7330-0173-0060-1912

Height 10.4mm
 Width 71.4mm
 Länge: 173mm
 Screw-on: Yes
 Weight: 54,57g
 beam angle: 60 degrees
 IP Schutzart: IP66
 Material: Plastic

**KU IP MULTI-LINSENOPTIK 24IN1 173X71,4X6,5MM ABSTRAHLWINKEL 68° PC TRANSPARENT INKL.
 SILIKONDICHTUNG**

Product number 7330-0173-0068-1924

Height 6.5mm
 Width 71.5mm
 Länge: 173mm
 Screw-on: Yes
 Weight: 62,8g
 beam angle: 68Grad
 IP Schutzart: IP66
 Material: Plastic

KU IP MULTI-LINSENOPTIK 12IN1 173X71,4X10,4MM ABSTRAHLWINKEL 90° PC TRANSPARENT INKL. SILIKONDICHTUNG

Product number 7330-0173-0090-1912

Height 10.4mm
 Width 71.4mm
 Länge: 173mm
 Screw-on: Yes
 beam angle: 90 degrees
 Weight: 56,71g
 IP Schutzart: IP66
 Material: Plastic

KU IP MULTI-LINSENOPTIK 24IN1 173X71,4X6,5MM ABSTRAHLWINKEL 94° PC TRANSPARENT INKL. SILIKONDICHTUNG

Product number 7330-0173-0094-1924

Height 6.5mm
 Width 71.4mm
 Länge: 173mm
 Screw-on: Yes
 beam angle: 94Grad
 Weight: 57,92g
 IP Schutzart: IP66
 Material: Plastic

KU IP MULTI-LINSENOPTIK 36IN1 173X71,4X6,5MM ABSTRAHLWINKEL IESNA II S PC TRANSPARENT INKL. SILIKONDICHTUNG

Product number 7330-0173-2100-1936

Height 6.5mm
 Width 71.4mm
 Länge: 173mm
 Screw-on: Yes
 Weight: 53,2g
 IP Schutzart: IP66
 Material: Plastic

KU IP MULTI-LINSENOPTIK 12IN1 173X71,4X10,4MM ABSTRAHLWINKEL IESNA II M PC TRANSPARENT INKL. SILIKONDICHTUNG

Product number 7330-0173-2200-1912

Height 10.4mm
 Width 71.4mm
 Länge: 173mm
 Screw-on: Yes
 Weight: 55,88g
 IP Schutzart: IP66
 Material: Plastic

KU IP MULTI-LINSENOPTIK 24IN1 173X71,4X6,5MM ABSTRAHLWINKEL IESNA II M PC TRANSPARENT INKL. SILIKONDICHTUNG

Product number 7330-0173-2200-1924

Height 6.5mm
 Width 71.4mm
 Länge: 173mm
 Screw-on: Yes
 Weight: 59,51g
 IP Schutzart: IP66
 Material: Plastic

KU IP MULTI-LINSENOPTIK 36IN1 173X71,4X9,23MM ABSTRAHLWINKEL 60X60° PC TRANSPARENT INKL. SILIKONDICHTUNG


Product number 7330-0173-6060-1936

Height 9.23mm
 Width 71.4mm
 Länge: 173mm
 Screw-on: Yes
 Weight: 57,26g
 beam angle: 60 degrees
 IP Schutzart: IP66
 Material: Plastic

KU IP MULTI-LINSENOPTIK 36IN1 173X71,4X9,23MM ABSTRAHLWINKEL 90X90° PC TRANSPARENT INKL. SILIKONDICHTUNG

Product number 7330-0173-9090-1936

Height 9.23mm
 Width 71.4mm
 Länge: 173mm
 Screw-on: Yes
 beam angle: 90 degrees
 Weight: 52,8g
 IP Schutzart: IP66
 Material: Plastic

KU IP MULTI-LINSENOPTIK 12IN1 173X71,4X7,12MM ABSTRAHLWINKEL IESNA II H V PC TRANSPARENT INKL SILIKONDICHTUNG

Product number 7330-2173-220H-1912

No image available

KU RUNDOPTIK Ø184X12,5 MM 60° IP67 PC TRANSPARENT INKL. SILIKONDICHTUNG



Product number 7420-0184-0060-1900

Height 12.5mm
Screw-on: Yes
Surface and color: transparent
IP Schutzart: IP67
Outer diameter: 184,0mm
Weight: 168,8g
beam angle: 60 degrees
Material: Plastic

KU RUNDOPTIK Ø184X6,5 MM 81° IP67 PC TRANSPARENT INKL. 2 DICHTUNGEN



Product number 7420-0184-0081-1900

Height 6.5mm
Screw-on: Yes
Surface and color: transparent
beam angle: 81Grad
IP Schutzart: IP67
Outer diameter: 184,0mm
Weight: 102,34g
Material: Plastic

KU RUNDOPTIK Ø184X10,3 MM 90° IP67 PC TRANSPARENT INKL. SILIKONDICHTUNG



Product number 7420-0184-0090-1900

Screw-on: Yes
Surface and color: transparent
beam angle: 90 degrees
Weight: 112,89g
IP Schutzart: IP67
Material: Plastic

KU RUNDOPTIK Ø226X9,8 MM 90° IP67 PC TRANSPARENT



Product number 7420-0226-0090-1900

Height 9.8mm
Screw-on: Yes
Surface and color: transparent
beam angle: 90 degrees
Weight: 158,46g
Outer diameter: 226,0mm
IP Schutzart: IP67
Material: Plastic

KU RUNDOPTIK Ø226X6,25 MM 100° IP67 PC TRANSPARENT INKL. 2 SILIKONDICHTUNGEN



Product number 7420-0226-0100-1900

Height 6,25mm
Screw-on: Yes
Surface and color: transparent
Weight: 163,81g
Outer diameter: 226,0mm
IP Schutzart: IP67
beam angle: 100Grad
Material: Plastic

KU RUNDOPTIK Ø265X7 MM 81° IP67 PC TRANSPARENT INKL. 2 SILIKON DICHTUNGEN



Product number 7420-0265-0081-1900

Height 7mm
Screw-on: Yes
Surface and color: transparent
Weight: 206,52g
beam angle: 81Grad
Outer diameter: 265,0mm
IP Schutzart: IP67
Material: Plastic

KU RUNDOPTIK Ø265X12 MM 90° IP67 PC TRANSPARENT INKL. SILIKONDICHTUNG



Product number 7420-0265-0090-1900

Height 12mm
Screw-on: Yes
Surface and color: transparent
beam angle: 90 degrees
Outer diameter: 265,0mm
IP Schutzart: IP67
Weight: 277,8g
Material: Plastic

KU RUNDMULTIOPTIKOPTIK 30IN1 Ø184X12 MM 60° IP67 PC TRANSPARENT INKL. SILIKONDICHTUNG



Product number 7421-0184-0060-1900

Height 12mm
Screw-on: Yes
Surface and color: transparent
IP Schutzart: IP67
Outer diameter: 184,0mm
beam angle: 60 degrees
Weight: 134,2g
Material: Plastic

KU RUNDMULTIOPTIKOPTIK 50IN1 Ø226X12 MM 90° IP67 PC TRANSPARENT INKL. SILIKONDICHTUNG



Product number 7421-0226-0090-1900

Height 12mm
 Screw-on: Yes
 Surface and color: transparent
 beam angle: 90 degrees
 Outer diameter: 226,0mm
 IP Schutzart: IP67
 Weight: 180,69g
 Material: Plastic

KU RUNDMULTIOPTIKOPTIK 60IN1 Ø265X11,93 MM 90° IP67 PC TRANSPARENT



Product number 7421-0265-0090-1900

Height 11.93mm
 Screw-on: Yes
 Surface and color: transparent
 beam angle: 90 degrees
 Weight: 240,53g
 Outer diameter: 265,0mm
 IP Schutzart: IP67
 Material: Plastic

KU ENDKAPPE F. LINEAROPTIK 280X43 MM PC TRANSPARENT



Product number 7500-0280-000A-1927
 Height 5mm
 Width 43mm
 Länge: 10mm
 Surface and color: transparent
 Weight: 0,8g
 Material: Plastic

KU LINEAROPTIK M. EINZELLINSEN 280X43 MM 9,6 MM HOCH ABSTRAHLWINKEL EINFACHASYMMETRISCH PMMA TRANSPARENT



Product number 7500-0280-0925-4727
 Height 9.63mm
 Width 43mm
 Länge: 280mm
 Surface and color: transparent
 Weight: 46,8g
 Material: PMMA

KU LINEAROPTIK M. EINZELLINSEN 280X43 MM 9,5 MM HOCH ABSTRAHLWINKEL 30° PMMA TRANSPARENT



Product number 7500-0280-0930-4727
 Height 9.5mm
 Width 40mm
 Länge: 280mm
 Screw-on: Yes
 Surface and color: transparent
 Weight: 44,04g
 beam angle: 30 degrees
 Material: Plastic

KU LINEAROPTIK M. EINZELLINSEN 280X43 MM 9,5 MM HOCH ABSTRAHLWINKEL 60° PMMA TRANSPARENT



Product number 7500-0280-0960-4727
 Height 9.5mm
 Width 40mm
 Länge: 280mm
 Screw-on: Yes
 Surface and color: transparent
 Weight: 45,74g
 beam angle: 60 degrees
 Material: Plastic

KU LINEAROPTIK M. EINZELLINSEN 280X43 MM 9,6 MM HOCH ABSTRAHLWINKEL DOPPELT ASYMMETRISCH PMMA TRANSPARENT



Product number 7500-0280-0980-4727
 Height 9.6mm
 Width 43mm
 Länge: 280mm
 Surface and color:transparent
 Weight: 47,25g
 Material: Plastic

KU LINEAROPTIK M. EINZELLINSEN 280X43 MM 9,5 MM HOCH ABSTRAHLWINKEL 90° PMMA TRANSPARENT




Product number 7500-0280-0990-4727
 Height 9.5mm
 Width 40mm
 Länge: 280mm
 Screw-on: Yes
 Surface and color:transparent
 beam angle: 90 degrees
 Weight: 47,14g
 Material: Plastic

KU UGR ABDECKUNG "HONEYCOMB" 280,5X47,8X3 MM HOCH PC SCHWARZ



Product number 7500-0285-0300-1923
 Height 3mm
 Width 47.8mm
 Länge: 280,5mm
 Surface and color:black
 Weight: 16,54g
 Material: PC

KU UGR ABDECKUNG "HONEYCOMB" 280,5X47,8X3 MM HOCH PC WEISS



Product number 7500-0285-0300-1924
 Height 3mm
 Width 47.8mm
 Länge: 280,5mm
 Weight: 16,8g
 Material: PC
 Surface and color:white

KU LINEAROPTIK 285X42 MM 9,5 MM HOCH ABSTRAHLWINKEL 90° PC TRANSPARENT



Product number 7500-0285-0990-1927

Height 9.5mm
 Width 42mm
 Länge: 285mm
 Clipable: yes
 Surface and color:transparent
 Weight: 22g
 beam angle: 90 degrees
 Material: PC

KU UGR ABDECKUNG "RASTER" 280X46X10 MM HOCH PC SCHWARZ



Product number 7500-0285-1000-1923

Height 10mm
 Width 46mm
 Länge: 280mm
 Surface and color:black
 Weight: 23,3g
 Material: PC

KU UGR ABDECKUNG "RASTER" 280X46X10 MM HOCH PC SILBER METALLISIERT



Product number 7500-0285-1000-1936

Height 10mm
 Width 46mm
 Länge: 280mm
 Surface and color:silver
 Material: PC
 Weight: 23,05g

KU LINEAROPTIK 285X42 MM 11,6 MM HOCH ABSTRAHLWINKEL 60° PC TRANSPARENT



Product number 7500-0285-1160-1927

Height 11.6mm
 Width 42mm
 Länge: 285mm
 Surface and color:transparent
 beam angle: 60 degrees
 Weight: 41,3g
 Material: Plastic

KU LINEAROPTIK 285X40MM 12,88MM HOCH ABSTRAHLWINKEL 20° DOPPELTASSYMETRISCH PMMA TRANSPARENT



Product number 7500-0285-1220-4727

Height 12.88mm
 Width 40mm
 Länge: 285mm
 Surface and color:transparent
 beam angle: 20Grad
 Weight: 42,85g
 Material: Plastic

KU LINEAROPTIK 285X40MM 14,4MM HOCH ABSTRAHLWINKEL 20° EINFACH ASSYMETRISCH PMMA TRANSPARENT



Product number 7500-0285-1420-4727

Height 14.4mm
 Width 40mm
 Länge: 285mm
 Surface and color:transparent
 beam angle: 20Grad
 Weight: 49,2g
 Material: Plastic

LINEAR CLICK OPTIC 2-ROW 283X40X8,6MM BEAM ANGLE 60° PMMA TRANSPARENT



Product number 7501-0283-8660-4727

Height 8.6mm
 Width 40mm
 Länge: 283mm
 Surface and color:transparent
 Weight: 61g
 Material: Plastic

KU LINEAROPTIK ANCLIPSBAR 286X61X9,6 MM ABSTRAHLWINKEL 25° DOPPELT ASSYMETRISCH PC TRANSPARENT



Product number 7501-0286-0925-1927

Height 9.6mm
 Width 61mm
 Länge: 286mm
 Clipable: yes
 Weight: 62,51g
 beam angle: 25 degrees
 Material: Plastic

KU LINEAROPTIK ANCLIPSBAR 286X61X9,6 MM ABSTRAHLWINKEL 30° PC TRANSPARENT



Product number 7501-0286-0930-1927

Height 9.6mm
 Width 61mm
 Länge: 286mm
 Clipable: yes
 Weight: 62,49g
 beam angle: 30 degrees
 Material: Plastic

KU LINEAROPTIK ANCLIPSBAR 286X61X9,6 MM ABSTRAHLWINKEL 90° PC TRANSPARENT



Product number 7501-0286-0990-1927

Height 9.6mm
 Width 61mm
 Länge: 286mm
 Clipable: yes
 beam angle: 90 degrees
 Weight: 68,23g
 Material: Plastic

KU LINEAROPTIK ANCLIPSBAR 286X61X11,2 MM ABSTRAHLWINKEL 60° PC TRANSPARENT



Product number 7501-0286-1160-1927

Height 11.2mm
 Width 61mm
 Länge: 286mm
 Clipable: yes
 beam angle: 60 degrees
 Weight: 72,18g
 Material: Plastic

ENDCAP FOR LINEAR OPTIC 2-ROW PC CLEAR



Product number 7501-0567-0283-4727

Height 40mm
 Width 9mm
 Länge: 9mm
 Surface and color: transparent
 Weight: 1,5g
 Material: Plastic

LINEAR CLICK OPTIC 2-ROW 567X40X8,6MM BEAM ANGLE 60° PMMA TRANSPARENT



Product number 7501-0567-8660-4727

Height 8.6mm
 Width 40mm
 Länge: 567mm
 Surface and color: transparent
 Weight: 125g
 Material: Plastic

KU ENDKAPPE B FÜR LINEAROPTIKE 567MM & 283MM PC TRANSPARENT



Product number 7501-B567-0283-4727

Height 40mm
 Width 9mm
 Länge: 5mm
 Surface and color: transparent
 Weight: 1g
 Material: Plastic

KU LINEAROPTIK ANCLIPSBAR 284,5X20X7 MM ABSTRAHLWINKEL 30° PC TRANSPARENT



Product number 7502-0284-0730-1927

Height 7mm
 Width 20mm
 Länge: 284,5mm
 Clipable: yes
 beam angle: 30 degrees
 Weight: 27,19g
 Material: Plastic

KU LINEAROPTIK ANCLIPSBAR 285,7X20X6,6 MM ABSTRAHLWINKEL 25° DOPPELT ASSYMETRISCH PC TRANSPARENT



Product number 7502-0285-0625-1927

Height 6.6mm
 Width 20mm
 Länge: 285,7mm
 Clipable: yes
 Weight: 22,54g
 beam angle: 25 degrees
 Material: Plastic

KU LINEAROPTIK ANCLIPSBAR 285,2X20X7,3 MM ABSTRAHLWINKEL 18° EINFACHASSYMETRISCH PC TRANSPARENT



Product number 7502-0285-0718-1927

Height 7.3mm
Width 20mm
Länge: 285,2mm
Clipable: yes
beam angle: 18 degrees
Weight: 25,4g
Material: Plastic

KU LINEAROPTIK ANCLIPSBAR 285,7X20X7 MM ABSTRAHLWINKEL 90° PC TRANSPARENT



Product number 7502-0285-0790-1927

Height 7mm
Width 20mm
Länge: 285,7mm
Clipable: yes
beam angle: 90 degrees
Weight: 27,1g
Material: Plastic

KU LINEAROPTIK ANCLIPSBAR 285,7X20X8 MM ABSTRAHLWINKEL 78° PC TRANSPARENT



Product number 7502-0285-0878-1927

Height 8mm
Width 20mm
Länge: 285,5mm
Clipable: yes
beam angle: 78Grad
Weight: 28,68g
Material: Plastic

KU LINEAROPTIK ANSCHRAUBBAR 286X61X15,3 MM ABSTRAHLWINKEL 120° PMMA TRANSPARENT



Product number 7503-0286-15120-4727

Height 15.3mm
Width 61mm
Länge: 286mm
Screw-on: Yes
beam angle: 120 degrees
Weight: 101,82g
Material: Plastic

KU LINEAROPTIK ANSCHRAUBBAR 286X61X15,3 MM ABSTRAHLWINKEL 18° EINFACH ASSYMETRISCH PMMA TRANSPARENT



Product number 7503-0286-1518-4727

Height 15.3mm
 Width 61mm
 Länge: 286mm
 Screw-on: Yes
 beam angle: 18 degrees
 Weight: 95,42g
 Material: Plastic

KU LINEAROPTIK ANSCHRAUBBAR 286X61X15,3 MM ABSTRAHLWINKEL 30° PMMA TRANSPARENT



Product number 7503-0286-1530-4727

Height 15.3mm
 Width 61mm
 Länge: 286mm
 beam angle: 30 degrees
 Weight: 86,76g
 Material: Plastic

KU LINEAROPTIK ANSCHRAUBBAR 286X61X15,3 MM ABSTRAHLWINKEL 40° BEIDSEITIG ASSYMETRISCH PMMA TRANSPARENT



Product number 7503-0286-1540-4727

Height 15.3mm
 Width 61mm
 Länge: 286mm
 Screw-on: Yes
 beam angle: 40 degrees
 Weight: 99,09g
 Material: Plastic

KU LINEAROPTIK ANSCHRAUBBAR 286X61X15,3 MM ABSTRAHLWINKEL 60° PMMA TRANSPARENT



Product number 7503-0286-1560-4727

Height 15.3mm
 Width 61mm
 Länge: 286mm
 Screw-on: Yes
 beam angle: 60 degrees
 Weight: 95,69g
 Material: Plastic


KU LINEAROPTIK ANSCHRAUBBAR 286X61X15,3 MM ABSTRAHLWINKEL 90° PMMA TRANSPARENT



Product number 7503-0286-1590-4727

Height 15.3mm
 Width 61mm
 Länge: 286mm
 Screw-on: Yes
 beam angle: 90 degrees
 Weight: 91,47g
 Material: Plastic

KU IP LINEAROPTIK 286X60,5X12 MM ABSTRAHLWINKEL 90° PMMA TRANSPARENT INKL. SILIKONDICHTUNG

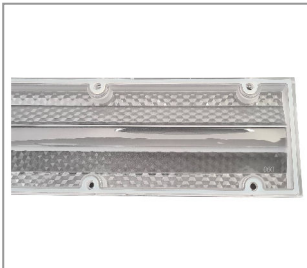

Product number 7520-1286-1290-1927

Height 12mm
 Width 60mm
 Länge: 286mm
 Screw-on: Yes
 beam angle: 90 degrees
 Weight: 97,49g
 IP Schutzart: IP66
 Material: Plastic

KU SCHRAUBENABDECKUNG F. OPTIK 3X11 Ø9,5X2MM PC TRANSPARENT


Product number 7305-0286-0902-1927

Height 2mm
 Surface and color: transparent
 Outer diameter: 9,5mm
 Weight: 0,15g
 Material: Plastic

KU MULTI-LINSENOPTIK 3X11 286X61X6,3 MM DA 20° ABSTRAHLWINKEL PMMA MATT


Product number 7305-0286-6020-4727

Height 6.3mm
 Width 61mm
 Länge: 286mm
 beam angle: 20Grad
 Weight: 50g
 Linsentyp: Multilinsen
 Surface and color: matt
 Material: Plastic

KU MULTI-LINSENOPTIK 3X11 286X61X6,3 MM 60° ABSTRAHLWINKEL PMMA MATT


Product number 7305-0286-6060-4727

Height 6.3mm
 Width 61mm
 Länge: 286mm
 Weight: 47,4g
 beam angle: 60 degrees
 Surface and color: matt
 Material: Plastic

KU MULTI-LINSENOPTIK 3X11 286X61X10,23 MM 70° ABSTRAHLWINKEL PC OBERFLÄCHE SCHWARZ GLÄNZEND M. EINZELREFLEKTOREN


Product number 7305-0286-6070-1923

Height 10.23mm
 Width 61mm
 Länge: 286mm
 Weight: 65,3g
 Surface and color: black
 beam angle: 70Grad
 Material: Plastic

 KU MULTI-LINSENOPTIK 3X11 286X61X6,3 MM 90° ABSTRAHLWINKEL PMMA MATT


Product number 7305-0286-6090-4727

Height 6.3mm
 Width 61mm
 Länge: 286mm
 beam angle: 90 degrees
 Weight: 45,55g
 Surface and color:matt
 Material: Plastic

 KU MULTI-LINSENOPTIK 3X11 286X61X6,3 MM 120° ABSTRAHLWINKEL PMMA MATT


Product number 7305-0286-6120-4727

Height 6.3mm
 Width 61mm
 Länge: 286mm
 Weight: 54,45g
 beam angle: 120 degrees
 Surface and color:matt
 Material: Plastic

 KU MULTI-LINSENOPTIK 3X11 286X61X11,5 MM 60° ABSTRAHLWINKEL PMMA MATT


Product number 7305-C286-6160-4727

Height 11.5mm
 Width 61mm
 Länge: 286mm
 Weight: 88,9g
 beam angle: 60 degrees
 Surface and color:matt
 Material: Plastic

 KU MULTI-LINSENOPTIK 3X11 28X61X11,5 MM 90° ABSTRAHLWINKEL PMMA MATT


Product number 7305-C286-6190-4727

Height 11.5mm
 Width 61mm
 Länge: 286mm
 beam angle: 90 degrees
 Surface and color:matt
 Weight: 78,15g
 Material: Plastic

KU MULTI-LINSENOPTIK 3X11 285,87X61X7,82 MM 60° ABSTRAHLWINKEL PMMA MATT

**Product number 7305-F285-6160-4727**

Height 7.82mm
Width 61mm
Länge: 285,87mm
Weight: 73,45g
beam angle: 60 degrees
Surface and color:matt
Material: Plastic

KU MULTI-LINSENOPTIK 3X11 285,87X61X7,82 MM 90° ABSTRAHLWINKEL PMMA MATT

**Product number 7305-F285-6190-4727**

Height 7.82mm
Width 61mm
Länge: 285,87mm
beam angle: 90 degrees
Weight: 74,7g
Surface and color:matt
Material: Plastic

 KU HALTER 21,78X14,67 MM F. Ø 21 MM SPOTOPTIK PC SCHWARZ


Product number 7902-2178-0014-4723

Height 14.67mm
 Clipable: yes
 Surface and color: black
 Outer diameter: 21.78mm
 Weight: 1.46g
 Material: Plastic

 KU ENDKAPPE B 37,29X8,10 MM FÜR LINEAROPTIK 285X40 MM PC TRANSPARENT


Product number 7905-0037-0800-1927

Height 8.1mm
 Länge: 37.29mm
 Clipable: yes
 Surface and color: transparent
 Weight: 0.71g
 Material: Plastic


 KU ENDKAPPE A 39,98X9,5 MM FÜR LINEAROPTIK 285X40 MM PC TRANSPARENT


Product number 7905-0039-0900-1927


Height 9.5mm
 Width 39.98mm
 Clipable: yes
 Surface and color: transparent
 Weight: 1g
 Material: Plastic



LED COMPONENTS
COB CONNECTORS

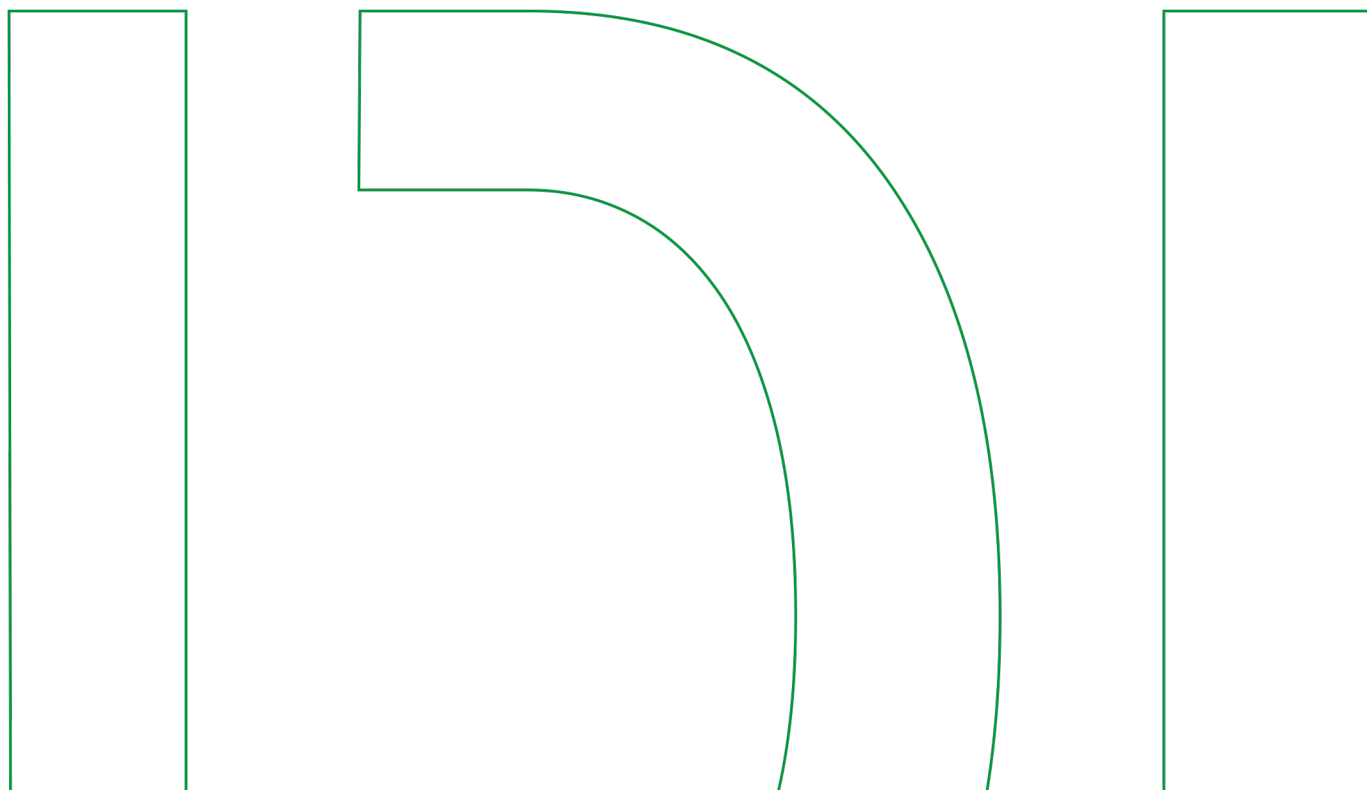


LED ANSCHLUSSELEMENT 50X16,7X5,3 M. HALTEARM F. COB 17,85X17,85 LEITER 1X0,75 PBT WEISS

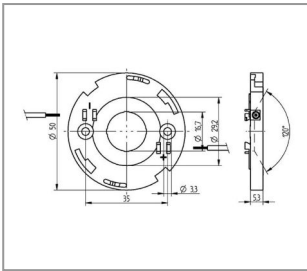

Product number 4001-5016-0107-1717

Height	5.3mm	Material:	Plastic
Screw-on:	Yes	IP Schutzart:	IP20
Number of poles:	2		
Plug contact:	Yes		
Outer diameter:	50,0mm		
Cable cross section:	0,75mm ²		
Diameter inside:	16,7mm		
Surface and color:	white		


LED ANSCHLUSSELEMENT 50X17,5X5,2 M. HALTEARM F. COB 19X19 LEITER 1X0,5 PBT WEISS

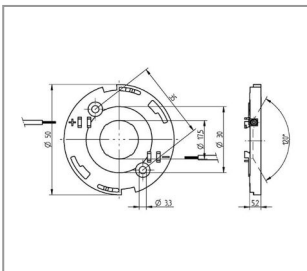

Product number 4001-5017-0105-1919


Height	5.2mm	Material:	Plastic
Screw-on:	Yes		
Number of poles:	2		
Plug contact:	Yes		
Outer diameter:	50,0mm		
Diameter inside:	17,5mm		
Cable cross section:	0,5mm ²		
Surface and color:	white		

LED ANSCHLUSSELEMENT 50X17,5X5,2 M. HALTEARM F. COB 19X19 LEITER 1X0,75 PBT WEISS



Product number 4001-5017-0175-1919


LED ANSCHLUSSELEMENT 50X25X5,05 M. HALTEARM F. COB 28X28 LEITER 1X0,5 PBT WEISS

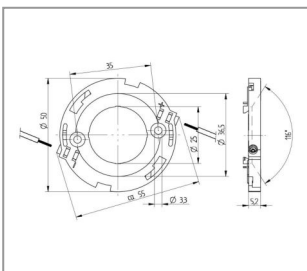

Product number 4001-5025-0105-2828

Height	5.05mm	Material:	Plastic
Screw-on:	Yes		
Number of poles:	2		
Plug contact:	Yes		
Outer diameter:	50,0mm		
Diameter inside:	25,0mm		
Cable cross section:	0,5mm ²		
Surface and color:	white		


LED ANSCHLUSSELEMENT 50X25X5,05 M. HALTEAM F. COB 28X28 LEITER 1X0,75 PBT WEISS

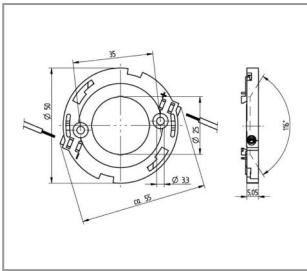

Product number 4001-5025-0107-2828

Height: 5.05mm
Material: Plastic
Screw-on: Yes
Number of poles: 2
Plug contact: Yes
Outer diameter: 50,0mm
Diameter inside: 25,0mm
Cable cross section: 0,75mm²
Surface and color: white


LED ANSCHLUSSELEMENT 35X11X3,65 M. HALTEFEDER F. COB 15,85X15,85 LEITER 1X0,5 PBT WEISS

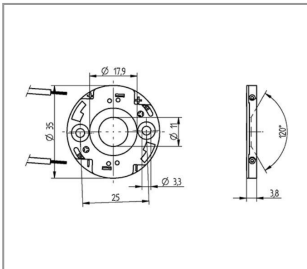

Product number 4002-3511-0105-1515

Height: 3.65mm
Material: Plastic
Screw-on: Yes
Number of poles: 2
Plug contact: Yes
Diameter inside: 11,0mm
Outer diameter: 35,0mm
Cable cross section: 0,5mm²
Surface and color: white


LED ANSCHLUSSELEMENT 35X12,2X3,5 M. HALTEFEDER F. COB 13,5X13,5 LEITER 1X0,5 PBT WEISS

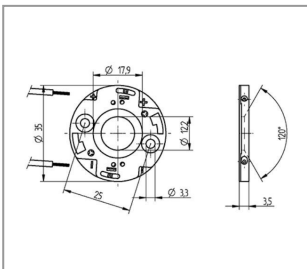

Product number 4002-3512-0105-1313

Height: 3.5mm
Material: Plastic
Screw-on: Yes
Number of poles: 2
Plug contact: Yes
Diameter inside: 12,2mm
Outer diameter: 35,0mm
Cable cross section: 0,5mm²
Surface and color: white


LED ANSCHLUSSELEMENT 35X16,5X3,95 M. HALTEFEDER F. COB 17,85X17,85 LEITER 1X0,5 PBT WEISS

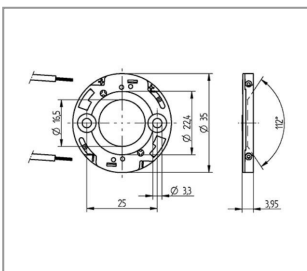

Product number 4002-3516-0105-1717

Height: 3.95mm
Material: Plastic
Screw-on: Yes
Number of poles: 2
Plug contact: Yes
Outer diameter: 35,0mm
Diameter inside: 16,5mm
Cable cross section: 0,5mm²
Surface and color: white


LED ANSCHLUSSELEMENT 35X17,5X3,5 M. HALTEFEDER F. COB 19X19 LEITER 1X0,5 PBT WEISS

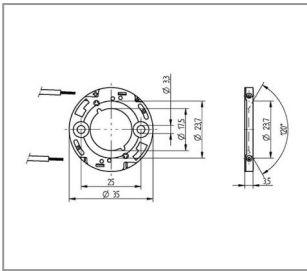

Product number 4002-3517-0105-1919

Height 3.5mm
Screw-on: Yes
Number of poles: 2
Plug contact: Yes
Outer diameter: 35,0mm
Diameter inside: 17,5mm
Cable cross section: 0,5mm²
Surface and color: white
Material: Plastic

LED ANSCHLUSSELEMENT 50X25,5X5,05 M. WÜRGEZAPFEN F. COB 28X28 LEITER 1X0,5 PBT WEISS

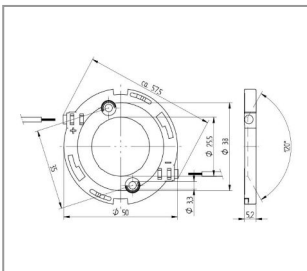


Product number 4003-5025-0105-2828

Height 5.05mm
Screw-on: Yes
Plug contact: Yes
Outer diameter: 50,0mm
Diameter inside: 25,0mm
Cable cross section: 0,5mm²
Surface and color: white
Material: Plastic



LED COMPONENTS
LED FASTENINGS

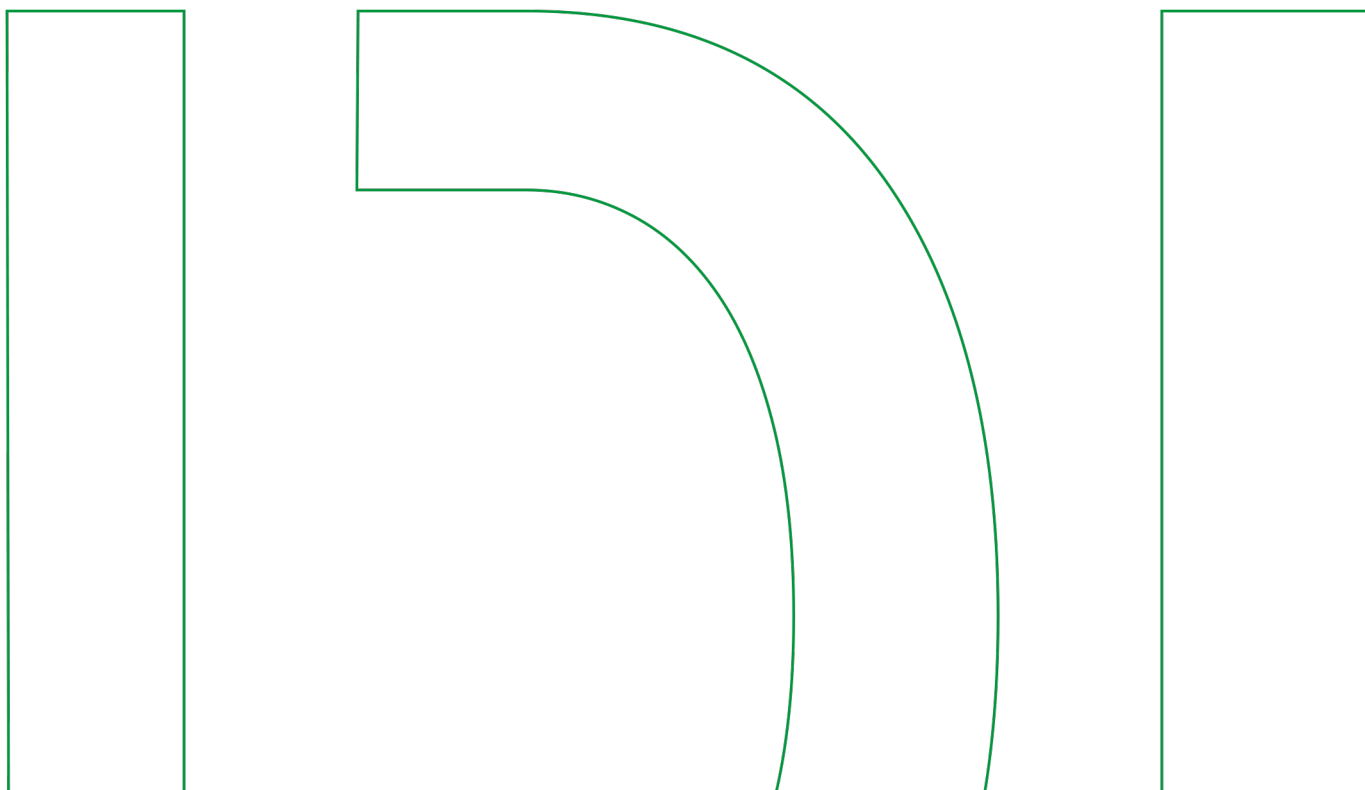

FE BEFESTIGUNGSCLIP FÜR LED PLATINEN IN SCHRAUB- UND PROFILNUTEN



Product number 5320-0803-0000-2118

Height 8mm
Width 3mm
Länge: 6,5mm
Clipable: yes
Material: Stainless steel
Weight: 0,15g
Surface and color: raw

KU BEFESTIGUNGSCLIP FÜR LED PLATINEN L8X5,5X8MM F. Ø4MM BOHRLOCH KLEMMBEREICH 1,4-2,4MM WEISS



Product number 5320-7481-0000-4224

Height 8.1mm
Width 7.4mm
Clipable: yes
Weight: 8,33g
Surface and color: white
Material: Plastic

KU BEFESTIGUNGSCLIP FÜR LED PLATINEN L8X5,5X9,1MM F. Ø4MM BOHRLOCH KLEMMBEREICH 2,5-3,5MM WEISS




Product number 5320-8491-0000-4224


Height 9.2mm
Width 7.4mm
Clipable: yes
Weight: 9g
Surface and color: white
Material: Plastic



LED COMPONENTS
LED ASSEMBLIES

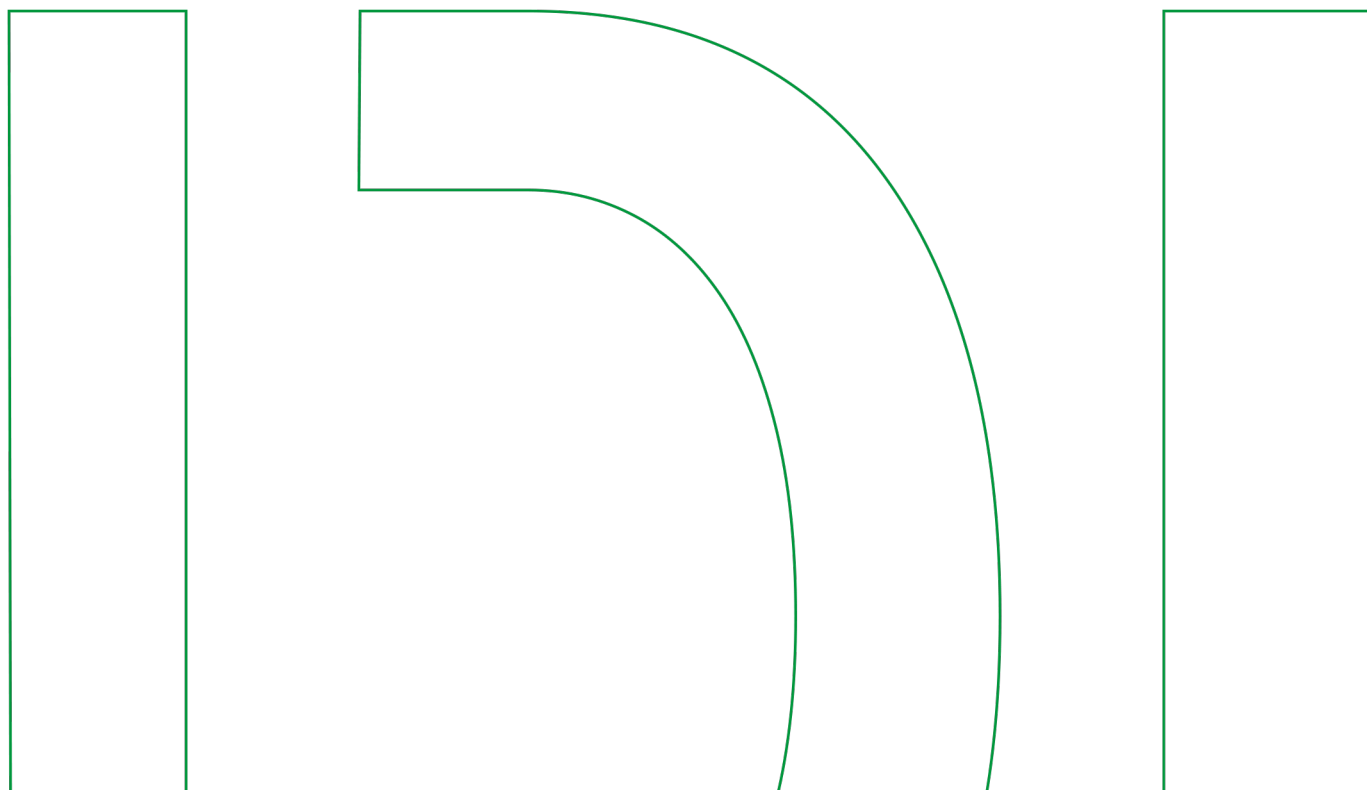

LED-MODUL 92X12MM 150MA 36V 6W 900LM 3.000K CRI>90 F. BLACKLINE M




Product number

1300-0092-1000-9300

Width: 12mm
Länge: 92mm
Screw-on: Yes
Solder pad: Yes
Power supply: CC
Light output: 900lm
Color temperature: 3.000K
At CC: 150mA

Material: Aluminium
Power consumption: 6W
Board material: aluminium core
CRI: >90
Surface and color: white

LED-MODUL 95X12MM 150MA 36V 6W 900LM 3.000K CRI>90 F. BLACKLINE S



Product number

1300-0095-1000-9300

Width: 12mm
Länge: 95mm
Screw-on: Yes
Solder pad: Yes
Power supply: CC
Light output: 900lm
Material: Stainless steel
Color temperature: 3.000K

At CC: 150mA
Power consumption: 6W
Board material: aluminium core
CRI: >90
Surface and color: white

LED-MODUL 95X12MM 150MA 36V 6W 900LM 4.000K CRI>90 F. BLACKLINE S



Product number

1300-0095-1000-9400

Width: 12mm
Länge: 95mm
Screw-on: Yes
Solder pad: Yes
Power supply: CC
Light output: 900lm
At CC: 150mA
Material: Aluminium

Color temperature: 4.000K
Power consumption: 6W
Board material: aluminium core
CRI: >90
Surface and color: white

LED LEUCHTSTOCK 150X30MM 3W 250LM IP44 CRI>80 3000K



Product number

8350-0150-2503-4483

Height: 30mm
Number of poles: 2
Channels: 1
Surface and color: silver
Board material: FR4
Cable length: 5000mm
Plug: Yes
Light output: 250lm

CRI: >80
Outer diameter: 150,0mm
beam angle: 120 degrees
Power consumption: 3W
Power supply: AC - 230V
Color temperature: 3.000K
IP Schutzart: IP44
Material: Plastic

LED LEUCHTSTOCK 225X30MM 3W 250LM IP44 CRI>80 3000K




Product number	8350-0225-2503-4483		
Height	30mm	CRI:	>80
Number of poles:	2	beam angle:	120 degrees
Channels:	1	Power consumption:	3W
Surface and color:	silver	Power supply:	AC - 230V
Board material:	FR4	Color temperature:	3.000K
Cable length:	5000mm	IP Schutzart:	IP44
Plug:	Yes	Outer diameter:	225,0mm
Light output:	250lm	Material:	Plastic

LED PROFIL BREIT MONTIERT M. TASTDIMMER 21,6W 772 MM LG. DIMM2WARM 2200-4000K CRI>90 ELOXIERT




Product number	8920-0216-0772-9019		
Height	12mm	Channels:	2
Width	40mm	Power supply:	CV
Länge:	772mm	Light output:	2590lm
Screw-on:	Yes	At CV:	24
Number of poles:	2	beam angle:	120 degrees
Plug contact:	Yes	Color temperature:	2.200K
Power consumption:	21,6W	Board material:	aluminium core
Control:	Yes	CRI:	>90
		IP Schutzart:	IP20

LED PROFIL BREIT MONTIERT M. TASTDIMMER 32,4W 1157 MM LG. DIMM2WARM 2200-4000K CRI>90 ELOXIERT

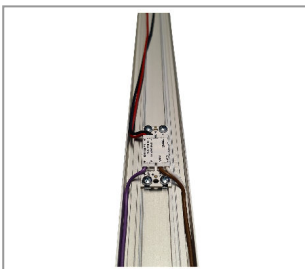


Product number	8920-0324-0772-9019		
Height	12mm	Channels:	2
Width	40mm	Power supply:	CV
Länge:	1157mm	At CV:	24
Screw-on:	Yes	beam angle:	120 degrees
Number of poles:	2	Color temperature:	2.200K
Plug contact:	Yes	Light output:	3890lm
Power consumption:	32,4W	Board material:	aluminium core
Control:	Yes	CRI:	>90
		IP Schutzart:	IP20

LED PROFIL BREIT MONTIERT M. TASTDIMMER 43,2W 1542 MM LG. DIMM2WARM 2200-4000K CRI>90 ELOXIERT

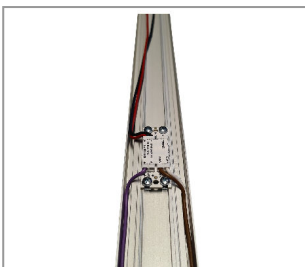


Product number	8920-0432-1542-9019		
Height	12mm	Light output:	5200lm
Width	40mm	Power supply:	CV
Länge:	1542mm	At CV:	24
Screw-on:	Yes	beam angle:	120 degrees
Number of poles:	2	Color temperature:	2.200K
Plug contact:	Yes	Power consumption:	43,2W
Control:	Yes	Board material:	aluminium core
Channels:	2	CRI:	>90
		IP Schutzart:	IP20

LED PROFIL SCHMAL 260 MM LG. TUNEABLE WHITE 7,0W 651LM 2200-4000K CRI>90 ELOXIERT




Product number	8925-0007-0260-9019	
Height	11.34mm	Surface and color:anodized
Width	18.4mm	Material: Aluminium
Länge:	260mm	CRI: >90
Number of poles:	3	IP Schutzart: IP20
Power supply:	CV	
At CV:	24	
Light output:	651lm	
Power consumption:	7W	

LED PROFIL SCHMAL 1.157 MM LG. TUNEABLE WHITE 22,1W 2.100LM 2200-4000K CRI>90 M. ENDKAPPEN ELOXIERT




Product number	8925-0221-1157-9019	
Height	17.4mm	Surface and color:anodized
Width	18.4mm	Light output: 2100lm
Länge:	1157mm	IP Schutzart: IP40
Clipable:	yes	Material: Aluminium
Number of poles:	3	Cable length: 500mm
Power supply:	CV	CRI: >90
Power consumption:	22W	
At CV:	24	

LED PROFIL SCHMAL 912 MM LG. TUNEABLE WHITE 25,2W 24VDC 2.340LM 2200-4000K CRI>90 M. ENDKAPPEN ELOX




Product number	8925-0252-0912-9019	
Height	11.43mm	Surface and color:anodized
Width	18.4mm	Material: Aluminium
Länge:	912mm	CRI: >90
Channels:	3	IP Schutzart: IP20
Power supply:	CV	
Light output:	2340lm	
Power consumption:	25W	
At CV:	24	

LED PROFIL SCHMAL 1.157 MM LG. TUNEABLE WHITE 32,2W 2.990LM 2200-4000K CRI>90 M. ENDKAPPEN ELOXIERT




Product number	8925-0322-1157-9019	
Height	11.43mm	Material: Aluminium
Width	18.4mm	CRI: >90
Länge:	1157mm	
Channels:	3	
Power supply:	CV	
At CV:	24	
Surface and color:	anodized	
Light output:	2990lm	

LED PROFIL SCHMAL 1.542 MM LG. TUNEABLE WHITE 42,7W 24VDC 3.970LM 2200-4000K CRI>90 M. ENDKAPPEN ELO



Product number	8925-0427-1542-9019		
Height	11.43mm	Cable length:	500mm
Width	18.4mm	CRI:	>90
Länge:	1542mm	Power consumption:	42W
Power supply:	CV	IP Schutzart:	IP20
Light output:	3970lm		
At CV:	24		
Surface and color:	anodized		
Material:	Aluminium		

LED PROFIL CD12 720 MM LG. M. INTEGRIERTEM PROXI DIMMER TUNEABLE WHITE 16,8W 24VDC 1.862LM 2200-3000K CRI>93 ELOXIERT




Product number	8926-0168-0720-9019
-----------------------	----------------------------

LED PROFIL CD12 920 MM LG. M. INTEGRIERTEM PROXI DIMMER TUNEABLE WHITE 21,6W 24VDC 2.394LM 2200-3000K CRI>93 ELOXIERT



Product number	8926-0216-0920-9019
-----------------------	----------------------------


LED PROFIL CD12 1210 MM LG. M. INTEGRIERTEM PROXI DIMMER TUNEABLE WHITE 28,8W 24VDC 3.192LM 2200-3000K CRI>93 ELOXIERT




Product number	8926-0288-1210-9019
-----------------------	----------------------------



LED COMPONENTS
LED ROLLER PULLS

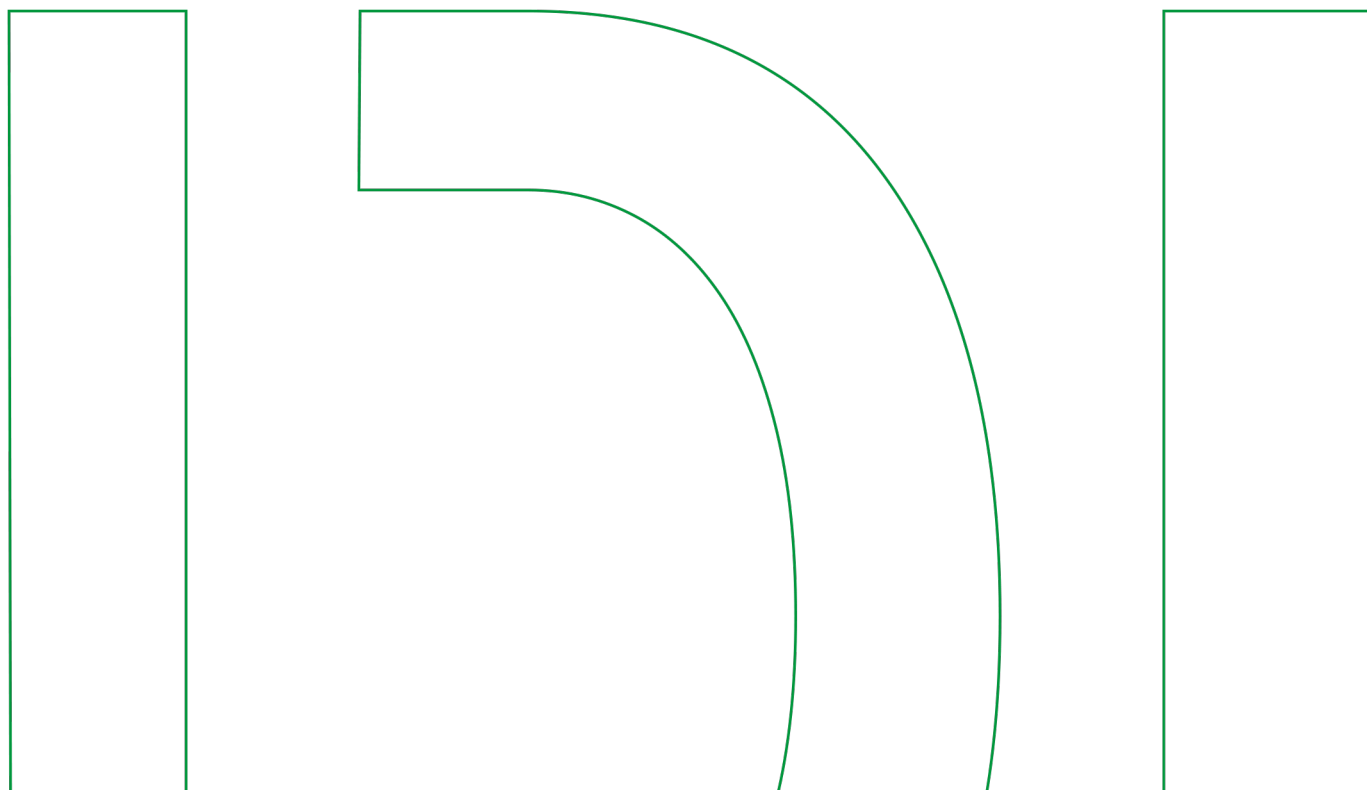


2PCS ROLLI SET FOR LED LUMINAIRES WITH MIN. 0,2KG WEIGHT, TOTAL CABLE LENGTH 2.400MM TRANSPARENT



Product number **2702-1075-2400-0002**

Height	42mm	Cable conversion:	FEP
Width	43mm	Cable cross section:	0,75mm ²
Länge:	52mm		
Screw-on:	Yes		
Cable end processing:	ferrule		
Weight:	198g		
Surface and color:	black		
Cable type:	single strand		


3PCS ROLLI SET FOR LED LUMINAIRES WITH MIN. 0,2KG WEIGHT, TOTAL CABLE LENGTH 2.400MM TRANSPARENT



Product number **2702-1075-2400-0003**

Height	42mm	Cable conversion:	FEP
Width	43mm	Cable cross section:	0,75mm ²
Länge:	52mm	Weight:	297g
Screw-on:	Yes	Cable type:	coaxial
Number of poles:	2		
Number of wires:	2		
Cable end processing:	ferrule		
Surface and color:	black		

2 TEILIGES MONTIERTES ROLLISSET F. LED LEUCHE MIN. 0,2 KG GESAMTKABELLÄNGE 4400 MM TRANSPARENT HÖHENVERSTELLBAR 1100 MM ANSCHLUSSKABEL ROT/SCHWARZ



Product number **2702-1075-4400-0002**

2PCS ROLLI SET FOR LED LUMINAIRES 1,1KG WEIGHT, TOTAL CABLE LENGTH 2.400MM TRANSPARENT



Product number **2711-1075-2400-0002**


Height	42mm	Cable type:	single strand
Width	43mm	Cable conversion:	FEP
Länge:	52mm	Cable cross section:	0,75mm ²
Screw-on:	Yes		
Number of wires:	1		
Cable end processing:	ferrule		
Weight:	198g		
Surface and color:	black		

2PCS ROLLI SET FOR LED LUMINAIRES 1,1KG WEIGHT, TOTAL CABLE LENGTH 4.400MM TRANSPARENT




Product number 2711-1075-4400-0002
Height 42mm Cable cross section:0,75mm²
Width 43mm Weight: 220g
Länge: 52mm
Number of wires: 1
Cable end processing:ferrule
Surface and color: black
Cable type: single strand
Cable conversion: FEP

ROLLI 2IN1 F. LED SINGLE PENDANT LIGHT WITH MAX. 3 KG, CABELLENGTH1800 MM 2X0,75 MM²

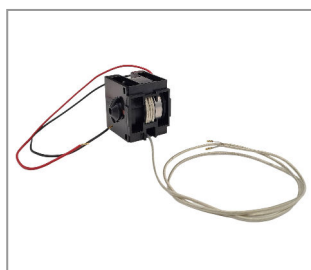

Product number 2730-2075-1800-6800
Height 42mm
Width 43mm
Länge: 52mm

ROLLI 2IN1 F. LED EINZELPENDEL MAX. 3 KG, KABELLÄNGE 1800 MM 2X0,75 MM² HÖHENVERSTELLBAR 1000 MONTIERT IN KU-GEHÄUSE



Product number 2730-2075-1800-6801

FE DECKENHALTER 390X65,5X15 MM M. 2 MAGNETEN F. 2X ROLLI IN KU HALTER ROH




Product number 2740-0390-0065-2101
Height 15mm
Width 65.5mm
Länge: 390mm
Screw-on: Yes
Weight: 423g
Material: Iron
Surface and color:natural color

V2A BALDACHIN ROLLIKASTEN 400X67,5X52 MM ROH PASSEND F. FE DECKENHALTER 390X65,5X15 MM






Product number 2741-0400-6752-3401


Height 52mm
Width 67.5mm
Länge: 400mm
Clipable: yes
Surface and color: nickel-matt
Material: Stainless steel
Weight: 554g



LED COMPONENTS
LED BLACKLINE

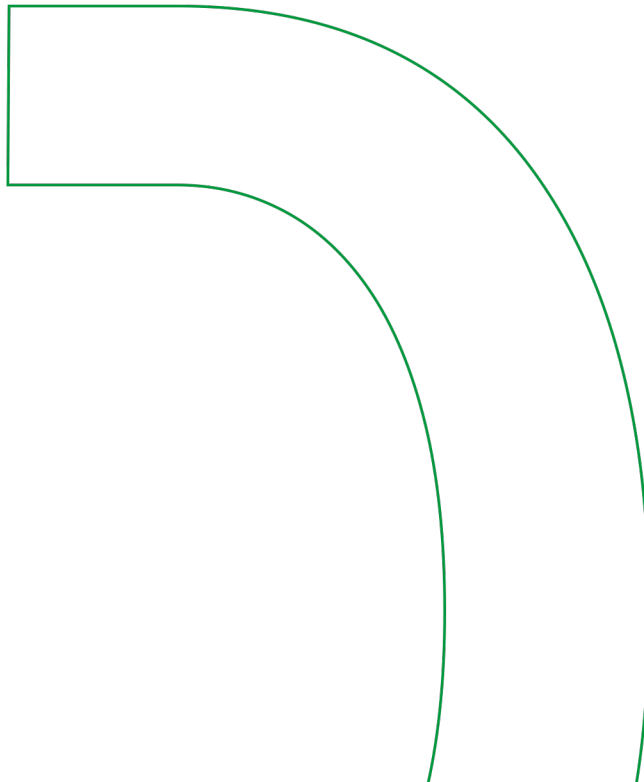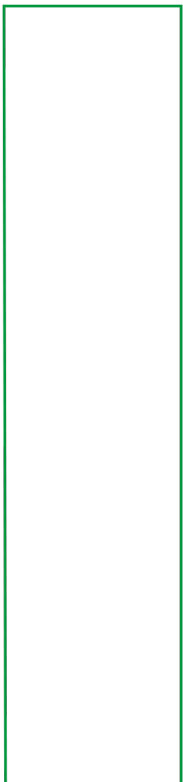

KU DIFFUSORSCHEIBE F. 6-FACH REFLEKTOR BLACKLINE S 96X9X0,2 MM PC MATT

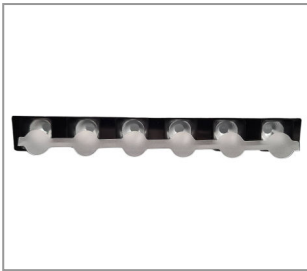
Product number 7550-0096-0900-1927

Height 0,2mm
 Width 9mm
 Länge: 96mm
 Clipable: yes
 Surface and color: transparent
 Weight: 0,12g
 Material: Plastic

 KU 6-FACH REFLEKTOR BLACKLINE S 96X10X8,5 MM ABSTRAHLWINKEL 30° PC METALLISIERT


Product number 7550-0096-1030-1936

Height 8.5mm
 Width 10mm
 Länge: 96mm
 Screw-on: Yes
 Surface and color: chrome plated
 beam angle: 30 degrees
 Weight: 2,48g
 Material: Plastic

 KU 6-FACH REFLEKTOR BLACKLINE S 96X10X8,5 MM ABSTRAHLWINKEL 45° PC METALLISIERT


Product number 7550-0096-1045-1936

Height 8.5mm
 Width 10mm
 Länge: 96mm
 Screw-on: Yes
 Surface and color: chrome plated
 beam angle: 45 degrees
 Weight: 2,48g
 Material: Plastic

 KU 6-FACH LINSENOPTIK BLACKLINE S 96X10X7,8 MM ABSTRAHLWINKEL 15° PC TRANSPARENT


Product number 7551-0096-1015-1927

Height 7.8mm
 Width 10mm
 Länge: 96mm
 Screw-on: Yes
 Surface and color: transparent
 beam angle: 15 degrees
 Weight: 3,27g
 Material: Plastic

 KU 6-FACH LINSENOPTIK BLACKLINE S 96X10X7,8 MM ABSTRAHLWINKEL 30° PC TRANSPARENT


Product number 7551-0096-1030-1927

Height 7.8mm
 Width 10mm
 Länge: 96mm
 Screw-on: Yes
 Surface and color: transparent
 beam angle: 30 degrees
 Weight: 3,09g
 Material: Plastic

 KU 6-FACH LINSENOPTIK BLACKLINE S 96X10X7,8 MM ABSTRAHLWINKEL 48° PC TRANSPARENT


Product number 7551-0096-1048-1927


Height 7.8mm
 Width 10mm
 Länge: 96mm
 Screw-on: Yes
 Surface and color: transparent
 beam angle: 48 degrees
 Weight: 3g
 Material: Plastic

 KU 6-FACH UGR ABDECKUNG QUADRATISCH BLACKLINE S 100X12X10,8 MM PC SCHWARZ GLÄNZEND


Product number 7552-0100-1200-1923

Height 10.8mm
 Width 12mm
 Länge: 100mm
 Clipable: yes
 Surface and color: black
 Weight: 2,44g
 Material: Plastic

 KU 6-FACH UGR ABDECKUNG QUADRATISCH BLACKLINE S 100X12X10,8 MM PC WEISS GLÄNZEND


Product number 7552-0100-1200-1924


Height 10.8mm
 Width 12mm
 Länge: 100mm
 Clipable: yes
 Weight: 2,41g
 Surface and color: white
 Material: Plastic

 KU 6-FACH UGR ABDECKUNG RUND BLACKLINE S 100X12X10,8 MM PC SCHWARZ GLÄNZEND


Product number 7553-0100-1200-1923


Height 10.8mm
 Width 12mm
 Länge: 100mm
 Clipable: yes
 Surface and color:black
 Weight: 2,62g
 Material: Plastic

 KU 6-FACH UGR ABDECKUNG RUND BLACKLINE S 100X12X10,8 MM PC WEISS GLÄNZEND


Product number 7553-0100-1200-1924

Height 10.8mm
 Width 12mm
 Länge: 100mm
 Clipable: yes
 Weight: 2,66g
 Surface and color:white
 Material: Plastic

 KU 6-FACH UGR ABDECKUNG RUND BLACKLINE S 100X12X10,8 MM PC WEISS MATT


Product number 7553-0100-1200-1972

Height 10.8mm
 Width 12mm
 Länge: 100mm
 Clipable: yes
 Weight: 2,65g
 Material: PC
 Surface and color:white

 KU 6-FACH UGR ABDECKUNG RUND BLACKLINE S 100X12X10,8 MM PC SCHWARZ MATT


Product number 7553-1100-1200-1923

Height 10.8mm
 Width 12mm
 Länge: 100mm
 Clipable: yes
 Surface and color:black
 Weight: 2,67g
 Material: Plastic

 KU 6-FACH REFLEKTOR BLACKLINE M 92,4X15,2X6,7 MM ABSTRAHLWINKEL 20° PC METALLISIERT


Product number 7560-0092-1520-1936

Height 6.7mm
 Width 15.2mm
 Länge: 92,4mm
 Screw-on: Yes
 beam angle: 20Grad
 Surface and color:chrome plated
 Weight: 3,68g
 Material: Plastic

 KU 6-FACH REFLEKTOR BLACKLINE M 92,4X15,2X6,7 MM ABSTRAHLWINKEL 34° PC METALLISIERT


Product number 7560-0092-1534-1936


Height 6.7mm
 Width 15.2mm
 Länge: 92,4mm
 Screw-on: Yes
 Surface and color:chrome plated
 Weight: 3,87g
 beam angle: 34 degrees
 Material: Plastic

 KU 6-FACH REFLEKTOR BLACKLINE M 92,4X15,2X6,7 MM ABSTRAHLWINKEL 48° PC METALLISIERT


Product number 7560-0092-1548-1936

Height 6.7mm
 Width 15.2mm
 Länge: 92,4mm
 Screw-on: Yes
 beam angle: 48 degrees
 Surface and color:chrome plated
 Weight: 3,77g
 Material: Plastic

 KU 6-FACH LINSENOPTIK BLACKLINE M 92,4X15,2X7,5 MM ABSTRAHLWINKEL 23° PC TRANSPARENT

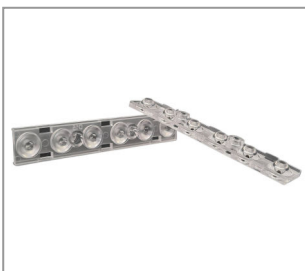
Product number 7561-0092-1523-1927

Height 7.5mm
 Width 15.2mm
 Länge: 92,4mm
 Screw-on: Yes
 Surface and color:transparent
 beam angle: 23Grad
 Weight: 5,07g
 Material: Plastic

 KU 6-FACH LINSENOPTIK BLACKLINE M 92,4X15,2X7,5 MM ABSTRAHLWINKEL 37° PC TRANSPARENT


Product number 7561-0092-1537-1927

Height 7.5mm
 Width 15.2mm
 Länge: 92,4mm
 Screw-on: Yes
 Surface and color: transparent
 beam angle: 37Grad
 Weight: 5,58g
 Material: Plastic

 KU 6-FACH LINSENOPTIK BLACKLINE M 92,4X15,2X7,5 MM ABSTRAHLWINKEL 42° PC TRANSPARENT


Product number 7561-0092-1542-1927


Height 7.5mm
 Width 15.2mm
 Länge: 92,4mm
 Screw-on: Yes
 Surface and color: transparent
 beam angle: 42Grad
 Weight: 5,51g
 Material: Plastic

 KU 6-FACH UGR ABDECKUNG QUADRATISCH BLACKLINE M 95,8X19,33X14 MM PC SCHWARZ GLÄNZEND


Product number 7562-0095-1900-1923

Height 14mm
 Width 19.33mm
 Länge: 95,8mm
 Surface and color: black
 Weight: 4,87g
 Material: Plastic

 KU 6-FACH UGR ABDECKUNG QUADRATISCH BLACKLINE M 95,8X19,33X14 MM PC WEISS GLÄNZEND


Product number 7562-0095-1900-1924

Height 14mm
 Width 19.33mm
 Länge: 95,8mm
 Clipable: yes
 Weight: 4,95g
 Surface and color: white
 Material: Plastic

 KU 6-FACH UGR ABDECKUNG QUADRATISCH BLACKLINE M 95,8X19,33X14 MM PC SCHWARZ MATT


Product number **7562-1095-1900-1923**

Height 14mm
 Width 19.33mm
 Länge: 95,8mm
 Clipable: yes
 Surface and color: black
 Weight: 5g
 Material: Plastic

 KU 6-FACH UGR ABDECKUNG RUND BLACKLINE M 95,8X19,33X14 MM PC SCHWARZ CHROM


Product number **7563-0095-1900-1916**


Height 14mm
 Width 19.33mm
 Länge: 95,8mm
 Clipable: yes
 Surface and color: schwarz-chrom
 Weight: 5,27g
 Material: Plastic

 KU 6-FACH UGR ABDECKUNG RUND BLACKLINE M 95,8X19,33X14 MM PC SCHWARZ GLÄNZEND


Product number **7563-0095-1900-1923**


Height 14mm
 Width 19.33mm
 Länge: 95,8mm
 Clipable: yes
 Surface and color: black
 Weight: 5,2g
 Material: Plastic

 KU 6-FACH UGR ABDECKUNG RUND BLACKLINE M 95,8X19,33X14 MM PC WEISS GLÄNZEND


Product number **7563-0095-1900-1924**

Height 14mm
 Width 19.33mm
 Länge: 95,8mm
 Clipable: yes
 Weight: 5,39g
 Surface and color: white
 Material: Plastic

KU 6-FACH UGR ABDECKUNG RUND BLACKLINE M 95,8X19,33X14 MM PC WEISS MATT

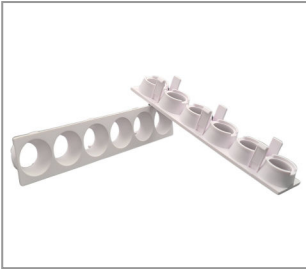


Product number

7563-0095-1900-1972

Height 14mm
Width 19.33mm
Länge: 95,8mm
Clipable: yes
Weight: 5,4g
Material: PC
Surface and color:white

LED-MODUL 154X23MM MAX. 400MA 3000K CRI>90 PASSEND F. BLACKLINE L OPTIK U. PROFIL



Product number 1300-0154-0400-9300
 Width 23mm
 Länge: 154mm
 Number of poles: 2
 Power supply: CC
 Color temperature:3.000K
 At CC: 400mA
 CRI: >90

LED-MODUL 318X23MM 17W 24V/DC CRI>90 2700K 4X1POL SMD KLEMME PASSEND F. BLACKLINE L OPTIK U. PROFIL



Product number 1300-0318-1724-9270
 Height 5.7mm
 Width 29mm
 Länge: 318mm
 Screw-on: Yes
 Channels: 1
 Plug contact: Yes
 Board material: FR4
 Number of poles:4
 Color temperature: 2.700K
 Power supply: CV
 Light output: 1235lm
 At CV: 24
 beam angle: 120 degrees
 Power consumption:17W
 CRI: >90
 Weight: 29g
 Surface and color:white
 Material: Plastic
 IP Schutzart: IP20

LED-MODUL 318X23MM 17W 24V/DC CRI>90 3000K 4X1POL SMD KLEMME PASSEND F. BLACKLINE L OPTIK U. PROFIL




Product number 1300-0318-1724-9300
 Height 5.75mm
 Width 29mm
 Länge: 318mm
 Screw-on: Yes
 Channels: 1
 Plug contact: Yes
 Board material: FR4
 Number of poles:4
 Power supply: CV
 Light output: 1235lm
 At CV: 24
 Power consumption:17W
 Color temperature: 3.000K
 CRI: >90
 Weight: 29g
 Surface and color: white
 IP Schutzart: IP20

LED-MODUL 318X23MM 17W 24V/DC CRI>90 4000K 4X1POL SMD KLEMME PASSEND F. BLACKLINE L OPTIK U. PROFIL



Product number 1300-0318-1724-9400
 Width 23mm
 Länge: 318mm
 Number of poles: 2
 Board material: FR4
 Weight: 28g
 Power supply: CV
 At CV: 24
 Power consumption:17W
 Color temperature:4.000K
 CRI: >90

ALU PROFIL 31,8X33 MM F. BLACKLINE L OPTIKEN METERWARE ELOXIERT

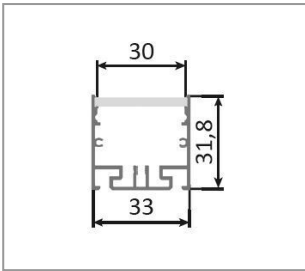
Product number 5000-3133-0000-3519

Height 31.8mm
 Width 33mm
 Länge: 1000mm
 Length: sold by the meter
 Surface and color: anodized
 Material: Aluminium

 ENDKAPPE ALU 31,8X33 MM F. BLACKLINE L PROFIL 2X EINSEITIG GESENKT F. M2,2 SCHRAUBE ROH


Product number 5200-3133-0000-3501

Height 31.8mm
 Width 33mm
 Screw-on: Yes
 Surface and color: raw
 Material: Aluminium

 ENDKAPPE ALU 31,8X33 MM F. BLACKLINE L PROFIL 2X EINSEITIG GESENKT F. M2,2 SCHRAUBE ELOXIERT


Product number 5200-3133-0000-3519

Height 31.8mm
 Width 33mm
 Screw-on: Yes
 Surface and color: anodized
 Material: Aluminium

 KU REFLEKTOR 23X23X19 MM F. BLACKLINE SERIE 48° ABSTRAHLWINKEL PC METALLISIERT


Product number 7020-0023-2348-7336

Height 19mm
 Width 23mm
 Länge: 23mm
 Bayonet: Yes
 beam angle: 48 degrees
 Surface and color: metalized
 Weight: 2,19g
 Material: Plastic

 KU REFLEKTOR 3FACH 69,2X24X12,3 F. BLACKLINE L 12° ABSTRAHLWINKEL PC METALLISIERT


Product number 7020-0069-1212-7336

Height 12.3mm
 Width 24mm
 Länge: 69,2mm
 beam angle: 12 degrees
 Weight: 6,36g
 Surface and color:metalized
 Material: Plastic

 KU REFLEKTOR 3FACH 69,2X24X12,3 F. BLACKLINE L 34° ABSTRAHLWINKEL PC METALLISIERT


Product number 7020-0069-1234-7336

Height 12.3mm
 Width 24mm
 Länge: 69,2mm
 Surface and color:metalized
 Weight: 6,03g
 beam angle: 34 degrees
 Material: Plastic

 KU REFLEKTOR 3FACH 69,2X24X12,3 F. BLACKLINE L 48° ABSTRAHLWINKEL PC METALLISIERT


Product number 7020-0069-1248-7336

Height 12.3mm
 Width 24mm
 Länge: 69,2mm
 Weight: 6,2g
 beam angle: 48 degrees
 Surface and color:metalized
 Material: Plastic

 KU REFLEKTOR 6FACH 149X24X12 F. BLACKLINE L 12° ABSTRAHLWINKEL PC METALLISIERT


Product number 7020-0149-1212-7336

Height 12mm
 Width 24mm
 Länge: 149mm
 beam angle: 12 degrees
 Weight: 13,21g
 Surface and color:metalized
 Material: Plastic

 KU REFLEKTOR 6FACH 149X24X12 F. BLACKLINE L 34° ABSTRAHLWINKEL PC METALLISIERT


Product number 7020-0149-1234-7336

Height 12mm
 Width 24mm
 Länge: 149mm
 Weight: 12,95g
 Surface and color:metalized
 beam angle: 34 degrees
 Material: Plastic

 KU REFLEKTOR 6FACH 149X24X12 F. BLACKLINE L 48° ABSTRAHLWINKEL PC METALLISIERT


Product number 7020-0149-1248-7336

Height 12mm
 Width 24mm
 Länge: 149mm
 beam angle: 48 degrees
 Weight: 12,77g
 Surface and color:metalized
 Material: Plastic

 KU DIFFUSORSCHEIBE 6FACH 14X151 MM F. BLACKLINE SERIE PMMA MATT


Product number 7820-0014-0151-4727

Width 151mm
 Länge: 14mm
 Clipable: yes
 Weight: 0,43g
 Surface and color:matt
 Material: Plastic

 KU DIFFUSORSCHEIBE 6FACH 14X151 MM F. BLACKLINE SERIE PMMA TRANSPARENT


Product number 7820-0014-0151-4772

Width 151mm
 Länge: 14mm
 Clipable: yes
 Surface and color:transparent
 Weight: 45g
 Material: Plastic

KU ABDECKUNG 1FACH 29,6X19,7 MM 79 MM LG. F. BLACKLINE SERIE PC GOLD


Product number 7820-2919-0029-4725

Height 19.7mm
 Width 29.6mm
 Diameter inside: 13,0mm
 Surface and color:gold
 Weight: 2,7g
 Material: Plastic

 KU ABDECKUNG 3FACH 29,6X19,7 MM 79 MM LG. F. BLACKLINE SERIE PC SCHWARZ


Product number 7820-2919-0079-4723

Height 19.7mm
 Width 29.6mm
 Länge: 79mm
 Clipable: yes
 Weight: 6,57g
 Surface and color:black
 Material: Plastic

 KU ABDECKUNG 3FACH 29,6X19,7 MM 79 MM LG. F. BLACKLINE SERIE PC WEISS


Product number 7820-2919-0079-4724

Height 29.6mm
 Width 19.7mm
 Länge: 79mm
 Clipable: yes
 Weight: 6,91g
 Surface and color:white
 Material: Plastic

 KU ABDECKUNG 1-FACH 30X30X19 MM F. BLACKLINE SERIE PC SCHWARZ


Product number 7820-3019-0030-4723


Height 19mm
 Width 30mm
 Länge: 30mm
 Surface and color:black

KU ABDECKUNG 6FACH 30X21 MM 159 MM LG. F. BLACKLINE SERIE PC SCHWARZ


Product number 7820-3021-0159-4723


Height 30mm
 Width 21mm
 Länge: 159mm
 Clipable: yes
 Surface and color:black
 Weight: 13,17g
 Material: Plastic

 KU ABDECKUNG 6FACH 30X21 MM 159 MM LG. F. BLACKLINE SERIE PC WEISS


Product number 7820-3021-0159-4724


Height 30mm
 Width 21mm
 Länge: 159mm
 Clipable: yes
 Surface and color:white
 Weight: 13,3g
 Material: Plastic

 KU ABDECKUNG 6FACH 30X21 MM 159 MM LG. F. BLACKLINE SERIE PC GOLD


Product number 7820-3021-0159-4725

Height 30mm
 Width 21mm
 Länge: 159mm
 Clipable: yes
 Weight: 13,48g
 Surface and color:gold
 Material: Plastic

 KU ABDECKUNG 6FACH 30X21 MM 159 MM LG. F. BLACKLINE SERIE PC GOLD MATT


Product number 7820-3021-0159-4725m

Height 30mm
 Width 21mm
 Länge: 159mm
 Weight: 13,65g
 Surface and color:gold
 Material: Plastic

KU ABDECKUNG 6FACH 30X21 MM 159 MM LG. F. BLACKLINE SERIE PC STUFEN GOLD

**Product number 7820-3021-0159-4748**

Height 30mm
Width 21mm
Länge: 159mm
Clipable: yes
Weight: 9,36g
Surface and color: gold
Material: Plastic

KU ABDECKUNG 6FACH 30X21 MM 159 MM LG. F. BLACKLINE SERIE PC STUFEN WEISS

**Product number 7820-3021-0159-4790**

Width 21mm
Länge: 159mm
Screw-on: Yes
Weight: 13,43g
Surface and color: white
Material: Plastic

KU ABDECKUNG RUND 6FACH 30X21 MM 159 MM LG. F. BLACKLINE SERIE PC WEISS/GUNMETAL

**Product number 7823-3021-0159-4724**

Height 30mm
Width 21mm
Länge: 159mm
Surface and color: white
Material: Plastic
Weight: 11,7g

KU 2-FACH UGR ABDECKUNG LINEAR F. BLACKLINE JOY SERIE 59X29MM PC SCHWARZ MATT

**Product number** 7566-0059-2912-1923

Height 12.3mm
Width 29mm
Länge: 59mm
Weight: 4,7g
Surface and color:black
Material: Plastic

KU 3-FACH UGR ABDECKUNG LINEAR F. BLACKLINE JOY SERIE 89X29MM PC SCHWARZ MATT

**Product number** 7566-0089-2912-1923


Height 8mm
Width 29mm
Länge: 89mm
Surface and color:black
Weight: 7,15g
Material: Plastic

KU 5-FACH UGR ABDECKUNG LINEAR F. BLACKLINE JOY SERIE 149X29MM PC SCHWARZ MATT

**Product number** 7566-0149-2912-1923

Height 12.3mm
Width 29mm
Länge: 149mm
Weight: 11,75g
Surface and color:black
Material: Plastic

KU 6-FACH UGR ABDECKUNG LINEAR F. BLACKLINE JOY SERIE 178X29MM PC SCHWARZ MATT

**Product number** 7566-0178-2912-1923

Height 12.3mm
Width 29mm
Länge: 178mm
Surface and color:black
Weight: 13,95g
Material: Plastic

KU 1-FACH UGR ABDECKUNG RUND F. BLACKLINE JOY SERIE Ø24MM PC SCHWARZ MATT



Product number **7566-2411-0000-1923**
Height 11.3mm
Surface and color:black
Weight: 1,55g
Outer diameter: 24,0mm
Material: Plastic

KU 1-FACH UGR ABDECKUNG RUND F. BLACKLINE JOY SERIE Ø34X11MM PC SCHWARZ MATT



Product number **7566-2915-0020-1923**
Height 11mm
Outer diameter: 34,0mm
Surface and color:black
Weight: 2,8g
Material: Plastic

KU 1-FACH UGR ABDECKUNG QUADRATISCH F. BLACKLINE JOY SERIE 29X29MM PC SCHWARZ MATT



Product number **7566-2929-1200-1923**
Height 12.3mm
Width 29mm
Länge: 29mm
Surface and color:black
Weight: 2,4g
Material: Plastic

KU 3-FACH UGR ABDECKUNG RUND F. BLACKLINE JOY SERIE Ø50MM PC SCHWARZ MATT



Product number **7566-5011-0000-1923**
Height 12mm
Outer diameter: 50,0mm
Surface and color:black
Weight: 6,25g
Material: Plastic

 KU 4-FACH UGR ABDECKUNG QUADRATISCH F. BLACKLINE JOY SERIE 59X59MM PC SCHWARZ MATT


Product number 7566-5959-1200-1923

Height 12.3mm
 Width 59mm
 Länge: 59mm
 Weight: 9,1g
 Surface and color:black
 Material: Plastic

 KU 7-FACH UGR ABDECKUNG RUND F. BLACKLINE JOY SERIE Ø69MM PC SCHWARZ MATT


Product number 7566-6911-0000-1923

Height 13mm
 Surface and color:black
 Outer diameter: 69,0mm
 Weight: 13,2g
 Material: Plastic

 KU 9-FACH UGR ABDECKUNG QUADRATISCH F. BLACKLINE JOY SERIE 89X89MM PC SCHWARZ MATT


Product number 7566-8989-1200-1923

Height 12.3mm
 Width 89mm
 Länge: 89mm
 Weight: 21,65g
 Surface and color:black
 Material: Plastic

 KU 5-FACH OPTIK 145X26X16MM LINEAR 30° ABSTRAHLWINKEL F. BLACKLINE JOY SERIE 89X29MM PMMA TRANSPARENT


Product number 7567-0145-1630-4727

Height 16mm
 Width 26mm
 Länge: 145mm
 Surface and color:transparent
 beam angle: 30 degrees
 Weight: 21,45g
 Material: Plastic

KU 1-FACH OPTIK Ø22X16,8MM RUND F. BLACKLINE JOY SERIE Ø24MM 20° ABSTRAHLWINKEL PMMA



Product number 7567-2411-0020-4727

Height 16.8mm
 Surface and color: transparent
 beam angle: 20Grad
 Outer diameter: 22,0mm
 Weight: 3g
 Material: Plastic

 KU 1-FACH OPTIK 26X26X16MM QUADRATISCH 30° ABSTRAHLWINKEL F. BLACKLINE JOY SERIE 29X29MM PMMA TRANSPARENT



Product number 7567-2626-1630-4727

Height 16mm
 Width 26mm
 Länge: 26mm
 Surface and color: transparent
 beam angle: 30 degrees
 Weight: 4,2g
 Material: Plastic

 KU 1-FACH OPTIK Ø29X15,6MM RUND F. BLACKLINE JOY SERIE Ø34MM 20° ABSTRAHLWINKEL PMMA TRANSPARENT



Product number 7567-2915-0020-4727

Height 15.6mm
 Surface and color: transparent
 beam angle: 20Grad
 Weight: 4g
 Outer diameter: 29,0mm
 Material: Plastic

 KU 3-FACH OPTIK Ø49X16,7MM RUND F. BLACKLINE JOY SERIE Ø50MM 30° ABSTRAHLWINKEL PMMA TRANSPARENT



Product number 7567-4916-0030-4727

Height 16.7mm
 Surface and color: transparent
 Outer diameter: 49,0mm
 Weight: 12,05g
 beam angle: 30 degrees
 Material: Plastic

KU 2-FACH OPTIK 55X26X16MM LINEAR 30° ABSTRAHLWINKEL F. BLACKLINE JOY SERIE 59X29MM PMMA TRANSPARENT

Product number 7567-5526-1630-4727

Height 16mm
 Width 26mm
 Länge: 55mm
 Surface and color:transparent
 beam angle: 30 degrees
 Weight: 8,45g
 Material: Plastic

KU 4-FACH OPTIK 59X59X16MM QUADRATISCH 30° ABSTRAHLWINKEL F. BLACKLINE JOY SERIE 59X59MM PMMA TRANSPARENT

Product number 7567-5959-1630-4727

Height 16mm
 Width 59mm
 Länge: 59mm
 Surface and color:transparent
 Weight: 17,9g
 Material: Plastic

KU 7-FACH OPTIK Ø68X16,7MM RUND F. BLACKLINE JOY SERIE Ø69MM 30° ABSTRAHLWINKEL PMMA TRANSPARENT

Product number 7567-6816-0030-4727

Height 16mm
 Surface and color:transparent
 Outer diameter: 68,0mm
 beam angle: 30 degrees
 Weight: 24,1g
 Material: Plastic

KU 3-FACH OPTIK 85X26X16MM LINEAR 20° ABSTRAHLWINKEL F. BLACKLINE JOY SERIE 89X29MM PMMA TRANSPARENT

Product number 7567-8526-1620-4727

Height 16mm
 Width 26mm
 Länge: 85mm
 Surface and color:transparent
 beam angle: 20Grad
 Weight: 13,05g
 Material: Plastic

KU 9-FACH OPTIK 86X86X16MM QUADRATISCH 30° ABSTRAHLWINKEL F. BLACKLINE JOY SERIE 89X89MM
PMMA TRANSPARENT



Product number 7567-8989-1630-4727

Height 16mm
Width 86mm
Länge: 86mm
Surface and color: transparent
Weight: 39,8g
beam angle: 30 degrees
Material: Plastic

KU 3-FACH LINSENOPTIK BLACKLINE IP 76,5X26,9X9,9 MM ABSTRAHLWINKEL 16° PC TRANSPARENT INKL. SILIKONDICHTUNG

Product number 7571-0076-2616-1927

Height	9.8mm	Material:	Plastic
Width	26.9mm		
Länge:	76,5mm		
Screw-on:	Yes		
Surface and color:	transparent		
Weight:	10,13g		
beam angle:	16Grad		
IP Schutzart:	IP67		

KU 3-FACH LINSENOPTIK BLACKLINE IP 76,5X26,9X9,9 MM ABSTRAHLWINKEL 34° PC TRANSPARENT INKL. SILIKONDICHTUNG

Product number 7571-0076-2634-1927

Height	9.9mm	Material:	Plastic
Width	26.9mm		
Länge:	76,5mm		
Screw-on:	Yes		
Surface and color:	transparent		
Weight:	10,87g		
IP Schutzart:	IP67		
beam angle:	34 degrees		

KU 6-FACH LINSENOPTIK BLACKLINE IP 155,9X26,9X9,9 MM ABSTRAHLWINKEL 16° PC TRANSPARENT INKL. SILIKONDICHTUNG

Product number 7571-0156-2616-1927

Height	9.9mm	Material:	Plastic
Width	26.9mm		
Länge:	155,9mm		
Screw-on:	Yes		
Surface and color:	transparent		
beam angle:	16Grad		
IP Schutzart:	IP67		
Weight:	20,72g		

KU 6-FACH LINSENOPTIK BLACKLINE IP 155,9X26,9X9,9 MM ABSTRAHLWINKEL 36° PC TRANSPARENT INKL. SILIKONDICHTUNG

Product number 7571-0156-2636-1927


Screw-on:	Yes		
Surface and color:	transparent		
Weight:	21,84g		
IP Schutzart:	IP67		
beam angle:	36 degrees		
Material:	Plastic		

 KU 3-FACH UGR ABDECKUNG RUND BLACKLINE IP 79,5X29,6X18,34 MM PC SCHWARZ MATT


Product number 7573-1079-2900-1923

Height 18.34mm
 Width 29.6mm
 Länge: 79,5mm
 Clipable: yes
 Weight: 7,29g
 Surface and color:black
 Material: Plastic

 KU 3-FACH UGR ABDECKUNG RUND BLACKLINE IP 79,5X29,6X18,34 MM PC WEISS MATT


Product number 7573-1079-2900-1924


Height 18.34mm
 Width 29.6mm
 Länge: 79,5mm
 Clipable: yes
 Weight: 7,89g
 Surface and color:white
 Material: Plastic

 KU 6-FACH UGR ABDECKUNG RUND BLACKLINE IP 158,9X29,6X18,31 MM PC SCHWARZ MATT


Product number 7573-1158-2900-1923

Height 18.31mm
 Width 29.6mm
 Länge: 158,9mm
 Clipable: yes
 Surface and color:black
 Weight: 14,22g
 Material: Plastic

 KU 6-FACH UGR ABDECKUNG RUND BLACKLINE IP 158,9X29,6X18,31 MM PC WEISS MATT


Product number 7573-1158-2900-1924

Height 18.31mm
 Width 29.6mm
 Länge: 158,9mm
 Clipable: yes
 Weight: 15,53g
 Surface and color:white
 Material: Plastic

KU 2FACH LINSENOPTIK F. BLACKLINE 2X2 32,3X11,5X7,5MM ABSTRAHLWINKEL 30° PMMA TRANSPARENT

**Product number 7591-0032-0730-4727**

Height 7.5mm
Width 11.5mm
Länge: 32,3mm
Surface and color: transparent
beam angle: 30 degrees
Material: PMMA

KU 4FACH UGR ABDECKUNG F. BLACKLINE 2X2 39X39X12,5MM PC SCHWARZ

**Product number 7592-0039-3900-1923**

Height 12.5mm
Width 39mm
Länge: 39mm
Clipable: yes
Surface and color: black
Material: PC

KU DIFFUSORSCHLEIBE FÜR BLACKLINE CIRCLE Ø70MM PC MATT



Product number 7555-0050-3800-1927
Material: PC
Surface and color:matt

KU 6-FACH REFLEKTOR FÜR BLACKLINE CIRCLE Ø70MM 12° ABSTRAHLWINKEL PC METALLISIERT



Product number 7555-0065-1212-1936
Material: PC
Surface and color:metalized

KU 6-FACH REFLEKTOR FÜR BLACKLINE CIRCLE Ø70MM 20° ABSTRAHLWINKEL PC METALLISIERT



Product number 7555-0065-1220-1936
Material: PC
Surface and color:metalized

KU 6-FACH REFLEKTOR FÜR BLACKLINE CIRCLE Ø70MM 34° ABSTRAHLWINKEL PC METALLISIERT



Product number 7555-0065-1234-1936
Material: PC
Surface and color:metalized

KU 6-FACH REFLEKTOR FÜR BLACKLINE CIRCLE Ø70MM 48° ABSTRAHLWINKEL PC METALLISIERT



Product number 7555-0065-1248-1936
Material: PC
Surface and color:metalized

KU DIFFUSORSCHIBE FÜR BLACKLINE CIRCLE Ø115MM PC MATT



Product number 7555-0095-3800-1927
Material: PC
Surface and color:matt
Weight: 1g

KU 12-FACH REFLEKTOR FÜR BLACKLINE CIRCLE Ø115MM 12° ABSTRAHLWINKEL PC METALLISIERT



Product number 7555-0109-1212-1936
Weight: 16,67g
Material: PC
Surface and color:metalized

KU 12-FACH REFLEKTOR FÜR BLACKLINE CIRCLE Ø115MM 20° ABSTRAHLWINKEL PC METALLISIERT



Product number 7555-0109-1220-1936
Material: PC
Surface and color:metalized

KU 12-FACH REFLEKTOR FÜR BLACKLINE CIRCLE Ø115MM 34° ABSTRAHLWINKEL PC METALLISIERT



Product number 7555-0109-1234-1936
Weight: 16,67g
Material: PC
Surface and color:metalized

KU 12-FACH REFLEKTOR FÜR BLACKLINE CIRCLE Ø115MM 48° ABSTRAHLWINKEL PC METALLISIERT



Product number 7555-0109-1248-1936
Weight: 16,67g
Material: PC
Surface and color:metalized

KU DIFFUSORSCHEIBE FÜR BLACKLINE CIRCLE Ø160MM PC MATT



Product number 7555-0140-3800-1927
Material: PC
Surface and color:matt

KU 18-FACH REFLEKTOR FÜR BLACKLINE CIRCLE Ø160MM 12° ABSTRAHLWINKEL PC METALLISIERT



Product number 7555-0154-1212-1936
Material: PC
Surface and color:metalized

KU 18-FACH REFLEKTOR FÜR BLACKLINE CIRCLE Ø160MM 20° ABSTRAHLWINKEL PC METALLISIERT



Product number 7555-0154-1220-1936
Material: PC
Surface and color:metalized

KU 18-FACH REFLEKTOR FÜR BLACKLINE CIRCLE Ø160MM 34° ABSTRAHLWINKEL PC METALLISIERT




Product number 7555-0154-1234-1936
Material: PC
Surface and color:metalized

KU 18-FACH REFLEKTOR FÜR BLACKLINE CIRCLE Ø160MM 48° ABSTRAHLWINKEL PC METALLISIERT



Product number 7555-0154-1248-1936
Material: PC
Surface and color:metalized

KU DIFFUSORSCHIBE FÜR BLACKLINE CIRCLE Ø205MM PC MATT



Product number 7555-0185-3800-1927
Material: PC
Surface and color:matt

KU 24-FACH REFLEKTOR FÜR BLACKLINE CIRCLE Ø205MM 12° ABSTRAHLWINKEL PC METALLISIERT



Product number 7555-0199-1212-1936
Material: PC
Surface and color:metalized

KU 24-FACH REFLEKTOR FÜR BLACKLINE CIRCLE Ø205MM 20° ABSTRAHLWINKEL PC METALLISIERT



Product number 7555-0199-1220-1936
Material: PC
Surface and color:metalized

KU 24-FACH REFLEKTOR FÜR BLACKLINE CIRCLE Ø205MM 34° ABSTRAHLWINKEL PC METALLISIERT



Product number 7555-0199-1234-1936
Material: PC
Surface and color:metalized

KU 24-FACH REFLEKTOR FÜR BLACKLINE CIRCLE Ø205MM 48° ABSTRAHLWINKEL PC METALLISIERT



Product number 7555-0199-1248-1936
Material: PC
Surface and color:metalized

KU 6-FACH UGR ABDECKUNG RUND F. BLACKLINE CIRCLE Ø70MM PC SCHWARZ GLÄNZEND



Product number 7558-0070-1200-1923
Surface and color:black
Material: PC

KU 12-FACH UGR ABDECKUNG RUND F. BLACKLINE CIRCLE Ø115MM PC SCHWARZ GLÄNZEND



Product number 7558-0115-1200-1923
Weight: 14,66g
Surface and color:black
Material: PC

KU 18-FACH UGR ABDECKUNG RUND F. BLACKLINE CIRCLE Ø160MM PC SCHWARZ GLÄNZEND




Product number 7558-0160-1200-1923
Surface and color:black
Material: PC

KU 24-FACH UGR ABDECKUNG RUND F. BLACKLINE CIRCLE Ø205MM PC SCHWARZ GLÄNZEND



Product number 7558-0205-1200-1923
Material: PC
Surface and color:metalized


KU DIFFUSORSCHEIBENELEMENT 139,6X14,6MM FÜR BLACKLINE CIRCLE XL Ø400MM PC MATT FÜR EINEN GESCHLOSSENEN RING WERDEN 8 SEGMENTE BENÖTIGT



Product number 7565-0139-1400-1927

Width 14.6mm
 Länge: 139,6mm
 Material: PC
 Surface and color:matt

KU DIFFUSORSCHEIBENELEMENT 144X14,6MM FÜR BLACKLINE CIRCLE XL Ø600MM PC MATT FÜR EINEN GESCHLOSSENEN RING WERDEN 12 SEGMENTE BENÖTIGT



Product number 7565-0144-1400-1927

Width 14.6mm
 Länge: 144mm
 Material: PC
 Surface and color:matt


KU 6-FACH REFLEKTORSEGMENT 146X20MM FÜR BLACKLINE CIRCLE XL Ø400MM ABSTRAHLWINKEL 20° PC METALLISIERT FÜR EINEN GESCHLOSSENEN RING WERDEN 8 KREISSEGMENTE BENÖTIGT



Product number 7565-0146-2020-1936

Width 20mm
 Länge: 146mm
 Material: PC
 Surface and color:metalized

KU 6-FACH REFLEKTORSEGMENT 146X20MM FÜR BLACKLINE CIRCLE XL Ø400MM ABSTRAHLWINKEL 48° PC METALLISIERT FÜR EINEN GESCHLOSSENEN RING WERDEN 8 KREISSEGMENTE BENÖTIGT

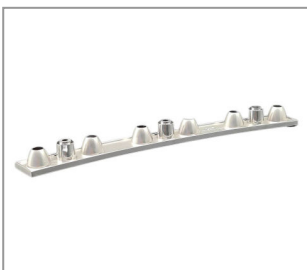

Product number 7565-0146-2048-1936

Width 20mm
 Länge: 146mm
 Material: PC
 Surface and color:metalized


KU 6-FACH REFLEKTORSEGMENT 148X20MM FÜR BLACKLINE CIRCLE XL Ø600MM ABSTRAHLWINKEL 20°
 PC METALLISIERT FÜR EINEN GESCHLOSSENEN RING WERDEN 12 KREISSEGMENTE BENÖTIGT



Product number 7565-0148-2020-1936

Width 20mm
 Länge: 148mm
 Material: PC
 Surface and color:metalized


KU 6-FACH REFLEKTORSEGMENT 148X20MM FÜR BLACKLINE CIRCLE XL Ø600MM ABSTRAHLWINKEL 48°
 PC METALLISIERT FÜR EINEN GESCHLOSSENEN RING WERDEN 12 KREISSEGMENTE BENÖTIGT

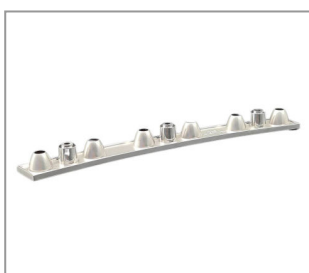

Product number 7565-0148-2048-1936

Width 20mm
 Länge: 148mm
 Material: PC
 Surface and color:metalized

KU DIFFUSORSCHLEIBENELEMENT 154X14,6MM FÜR BLACKLINE CIRCLE XL Ø800MM PC MATT FÜR EINEN
 GESCHLOSSENEN RING WERDEN 15 SEGMENTE BENÖTIGT



Product number 7565-0154-1400-1927

Width 14.6mm
 Länge: 154mm
 Material: PC
 Surface and color:matt

KU 6-FACH REFLEKTORSEGMENT 157,8X20MM FÜR BLACKLINE CIRCLE XL Ø800MM ABSTRAHLWINKEL
 20° PC METALLISIERT FÜR EINEN GESCHLOSSENEN RING WERDEN 15 KREISSEGMENTE BENÖTIGT



Product number 7565-0157-2020-1936

Width 20mm
 Länge: 157,8mm
 Material: PC
 Surface and color:metalized


KU 6-FACH REFLEKTORSEGMENT 157,8X20MM FÜR BLACKLINE CIRCLE XL Ø800MM ABSTRAHLWINKEL 48° PC METALLISIERT FÜR EINEN GESCHLOSSENEN RING WERDEN 15 KREISSEGMENTE BENÖTIGT



Product number 7565-0157-2048-1936

Width 20mm
 Länge: 157,8mm
 Material: PC
 Surface and color: metalized


KU DIFFUSORSCHLEIBENELEMENT 173,9X14,6MM FÜR BLACKLINE CIRCLE XL Ø1800MM PC MATT FÜR EINEN GESCHLOSSENEN RING WERDEN 30 SEGMENTE BENÖTIGT



Product number 7565-0173-1400-1927

Width 14.6mm
 Länge: 173,9mm
 Material: PC
 Surface and color: matt

KU DIFFUSORSCHLEIBENELEMENT 175X14,6MM FÜR BLACKLINE CIRCLE XL Ø1200MM PC MATT FÜR EINEN GESCHLOSSENEN RING WERDEN 20 SEGMENTE BENÖTIGT



Product number 7565-0175-1400-1927

Width 14.6mm
 Länge: 175mm
 Material: PC
 Surface and color: matt

KU 6-FACH REFLEKTORSEGMENT 175X20MM FÜR BLACKLINE CIRCLE XL Ø1200MM ABSTRAHLWINKEL 20° PC METALLISIERT FÜR EINEN GESCHLOSSENEN RING WERDEN 20 KREISSEGMENTE BENÖTIGT



Product number 7565-0175-2020-1936

Width 20mm
 Länge: 175mm
 Material: PC
 Surface and color: metalized


KU 6-FACH REFLEKTORSEGMENT 175X20MM FÜR BLACKLINE CIRCLE XL Ø1200MM ABSTRAHLWINKEL 48°
 PC METALLISIERT FÜR EINEN GESCHLOSSENEN RING WERDEN 20 KREISSEGMENTE BENÖTIGT



Product number 7565-0175-2048-1936

Width 20mm
 Länge: 175mm
 Material: PC
 Surface and color: metalized


KU DIFFUSORSCHIEBENELEMENT 180X14,6MM FÜR BLACKLINE CIRCLE XL Ø1500MM PC MATT FÜR EINEN
 GESCHLOSSENEN RING WERDEN 24 SEGMENTE BENÖTIGT



Product number 7565-0180-1400-1927

Width 14.6mm
 Länge: 180mm
 Material: PC
 Surface and color: matt


KU 6-FACH REFLEKTORSEGMENT 182,5X20MM FÜR BLACKLINE CIRCLE XL Ø1500MM ABSTRAHLWINKEL
 20° PC METALLISIERT FÜR EINEN GESCHLOSSENEN RING WERDEN 24 KREISSEGMENTE BENÖTIGT

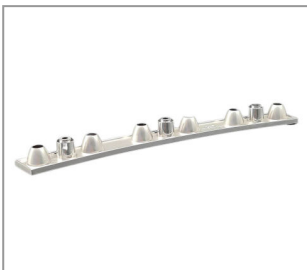

Product number 7565-0182-2020-1936

Width 20mm
 Länge: 182,5mm
 Material: PC
 Surface and color: metalized

KU 6-FACH REFLEKTORSEGMENT 182,5X20MM FÜR BLACKLINE CIRCLE XL Ø1500MM ABSTRAHLWINKEL
 48° PC METALLISIERT FÜR EINEN GESCHLOSSENEN RING WERDEN 24 KREISSEGMENTE BENÖTIGT



Product number 7565-0182-2048-1936

Width 20mm
 Länge: 182,5mm
 Material: PC
 Surface and color: metalized


KU 6-FACH REFLEKTORSEGMENT 175,9X20MM FÜR BLACKLINE CIRCLE XL Ø1800MM ABSTRAHLWINKEL 20° PC METALLISIERT FÜR EINEN GESCHLOSSENEN RING WERDEN 30 KREISSEGMENTE BENÖTIGT



Product number 7565-1175-2020-1936

Width 20mm
 Länge: 175,9mm
 Material: PC
 Surface and color: metalized

KU 6-FACH REFLEKTORSEGMENT 175,9X20MM FÜR BLACKLINE CIRCLE XL Ø1800MM ABSTRAHLWINKEL 48° PC METALLISIERT FÜR EINEN GESCHLOSSENEN RING WERDEN 30 KREISSEGMENTE BENÖTIGT



Product number 7565-1175-2048-1936

Width 20mm
 Länge: 175,9mm
 Material: PC
 Surface and color: metalized

KU 6-FACH UGR-ABDECKUNGSSEGMENT 153X22MM FÜR BLACKLINE CIRCLE XL Ø400MM PC SCHWARZ FÜR EINEN GESCHLOSSENEN RING WERDEN 8 KREISSEGMENTE BENÖTIGT



Product number 7568-0153-2200-1923

Width 22mm
 Länge: 153mm
 Surface and color: black
 Material: PC

KU 6-FACH UGR-ABDECKUNGSSEGMENT 155X22MM FÜR BLACKLINE CIRCLE XL Ø600MM PC SCHWARZ FÜR EINEN GESCHLOSSENEN RING WERDEN 12 KREISSEGMENTE BENÖTIGT



Product number 7568-0155-2200-1923

Width 22mm
 Länge: 155mm
 Surface and color: black
 Material: PC

KU 6-FACH UGR-ABDECKUNGSSEGMENT 166X22MM FÜR BLACKLINE CIRCLE XL Ø800MM PC SCHWARZ FÜR EINEN GESCHLOSSENEN RING WERDEN 15 KREISSEGMENTE BENÖTIGT

**Product number 7568-0166-2200-1923**

Width 22mm
Länge: 166mm
Surface and color:black
Material: PC

KU 6-FACH UGR-ABDECKUNGSSEGMENT 187,5X22MM FÜR BLACKLINE CIRCLE XL Ø1200MM PC SCHWARZ FÜR EINEN GESCHLOSSENEN RING WERDEN 20 KREISSEGMENTE BENÖTIGT

**Product number 7568-0187-2200-1923**

Width 22mm
Länge: 187,5mm
Surface and color:black
Material: PC

KU 6-FACH UGR-ABDECKUNGSSEGMENT 188X22MM FÜR BLACKLINE CIRCLE XL Ø1800MM PC SCHWARZ FÜR EINEN GESCHLOSSENEN RING WERDEN 30 KREISSEGMENTE BENÖTIGT

**Product number 7568-0188-2200-1923**

Width 22mm
Länge: 188mm
Surface and color:black
Material: PC

KU 6-FACH UGR-ABDECKUNGSSEGMENT 195X22MM FÜR BLACKLINE CIRCLE XL Ø1500MM PC SCHWARZ FÜR EINEN GESCHLOSSENEN RING WERDEN 24 KREISSEGMENTE BENÖTIGT

**Product number 7568-0195-2200-1923**

Width 22mm
Länge: 195mm
Surface and color:black
Material: PC