





**LED COMPONENTS**  
**LED STRIPES**



**LED-STRIP FLEXIBEL IP20 24V 4,8W/M 445LM/M 2700K RA>90 120 LEDS/M RÜCKSEITIG 3M TAPE ROLLE À 5 M**

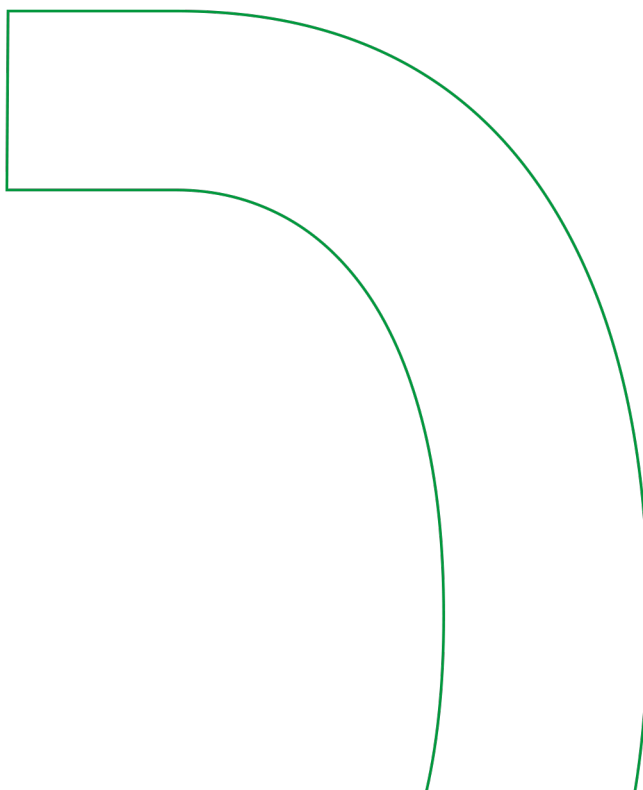

**Product number**

**2120-2404-0445-9270**

Height	1.3mm	Color temperature:	2.700K	CRI:	>90
Width	8mm	Power supply:	CV	Cable cross section:	0,5mm <sup>2</sup>
Länge:	5000mm	Power consumption:	5W	Cable type:	twin strands
Number of poles:	2	At CV:	24	Surface and color:	white
Channels:	1	beam angle:	120 degrees	IP Schutzart:	IP20
Number of wires:	2	Light output:	445lm		
Cable end processing:	tinned	Cable length:	95mm		
Cable conversion:	PVC	Weight:	75g		

**LED-STRIP FLEXIBEL IP20 24V 4,8W/M 445LM/M 3000K RA>90 120 LEDS/M RÜCKSEITIG 3M TAPE ROLLE À 5 M**



**Product number**

**2120-2404-0445-9300**

Height	1.3mm	Power supply:	CV	CRI:	>90
Width	8mm	Power consumption:	5W	Cable cross section:	0,5mm <sup>2</sup>
Länge:	5000mm	At CV:	24	Cable type:	twin strands
Number of poles:	2	beam angle:	120 degrees	Surface and color:	white
Channels:	1	Light output:	445lm	IP Schutzart:	IP20
Number of wires:	2	Cable length:	95mm		
Cable end processing:	tinned	Color temperature:	3.000K		
Cable conversion:	PVC	Weight:	75g		

**LED-STRIP FLEXIBEL IP20 24V 4,8W/M 455LM/M 3000K RA>90 120 LEDS/M RÜCKSEITIG 3M TAPE B=8MM ROLLE À 5**



**Product number**

**2120-2404-0455-9300**

Width	8mm	IP Schutzart:	IP20
Länge:	5000mm		
Power supply:	CV		
At CV:	24		
Light output:	455lm		
Power consumption:	4W		
Color temperature:	3.000K		
CRI:	>90		

**LED-STRIP FLEXIBEL IP20 24V 9,6W/M 890LM/M 2700K RA>90 120 LEDS/M RÜCKSEITIG 3M TAPE ROLLE À 10 M**



**Product number**

**2120-2409-0890-9270**

Width	8mm	IP Schutzart:	IP20
Länge:	10000mm		
Power consumption:	9W		
Color temperature:	2.700K		
Power supply:	CV		
Light output:	890lm		
At CV:	24		
CRI:	>90		

**LED-STRIP FLEXIBEL IP20 24V 9,6W/M 915LM/M 3000K RA>90 120 LEDS/M B=8 MM**



<b>Product number</b>		<b>2120-2409-0915-9300</b>	
Height	1.3mm	Power consumption:	10W
Width	8mm	Light output:	915lm
Länge:	5000mm	At CV:	24
Number of poles:	2	beam angle:	120 degrees
Number of wires:	2	Cable length:	95mm
Cable end processing:	tinned	Color temperature:	3.000K
Cable conversion:	PVC	Weight:	75g
Power supply:	CV	CRI:	>90
		Cable cross section:	0,5mm <sup>2</sup>
		Cable type:	twin strands
		Surface and color:	white
		IP Schutzart:	IP20

**LED-STRIP FLEXIBEL IP20 24V 9,6W/M 940LM/M 4000K RA>90 120 LEDS/M B=8 MM**



<b>Product number</b>		<b>2120-2409-0915-9400</b>	
Width	8mm		
Länge:	5000mm		
Power consumption:	9W		
Power supply:	CV		
At CV:	24		
Light output:	940lm		
Color temperature:	4.000K		
CRI:	>90		

**LED-STRIP FLEXIBEL IP20 24V 14,4W/M 1330LM/M 2.700K RA>90 180LEDS/M B=8 MM ROLLE À 5M**



<b>Product number</b>		<b>2120-2414-1330-9270</b>	
Width	8mm		
Länge:	5000mm		
Color temperature:	2.700K		
Power supply:	CV		
At CV:	24		
CRI:	>90		
Power consumption:	14W		
Light output:	1330lm		

**LED-STRIP FLEXIBEL IP20 24V 14,4W/M 1365LM/M 3000K RA>90 180LEDS/M B=8 MM ROLLE À 5M**



<b>Product number</b>		<b>2120-2414-1365-9300</b>	
Height	1.3mm	At CV:	24
Width	8mm	Light output:	1365lm
Länge:	5000mm	beam angle:	120 degrees
Number of poles:	2	Cable length:	95mm
Number of wires:	2	Power consumption:	15W
Cable end processing:	tinned	Color temperature:	3.000K
Cable conversion:	PVC	Weight:	75g
Power supply:	CV	CRI:	>90
		Cable cross section:	0,5mm <sup>2</sup>
		Cable type:	twin strands
		Surface and color:	white
		IP Schutzart:	IP20

**LED-STRIP FLEXIBEL IP20 24V 14,4W/M 1400LM/M 4.000K RA>90 180LEDS/M B=8 MM ROLLE À 5M**



**Product number**

**2120-2414-1400-9400**

Height	1.3mm	Power supply:	CV	Power consumption:	14W
Width	8mm	At CV:	24	Cable cross section:	0,5mm <sup>2</sup>
Länge:	5000mm	beam angle:	120 degrees	Cable type:	twin strands
Number of poles:	2	Cable length:	95mm	Surface and color:	white
Channels:	1	Weight:	75g	IP Schutzart:	IP20
Number of wires:	2	Light output:	1400lm		
Cable end processing:	tinned	Color temperature:	4.000K		
Cable conversion:	PVC	CRI:	>90		

**LED-STRIP FLEXIBEL IP20 24V 19,2W/M 1815LM/M 2700K RA>90 240 LEDS B=8MM ROLLE À 5 M**



**Product number**

**2120-2419-1815-9270**

**LED-STRIP FLEXIBEL IP20 24V 19,2W/M 1815LM/M 3000K RA>90 240 LEDS B=8MM ROLLE À 5 M**




**Product number**

**2120-2419-1815-9300**

Height	1.3mm	Power supply:	CV	Light output:	1815lm
Width	8mm	At CV:	24	Cable cross section:	0,5mm <sup>2</sup>
Länge:	5000mm	beam angle:	120 degrees	Cable type:	twin strands
Number of poles:	2	Cable length:	95mm	Surface and color:	white
Channels:	1	Power consumption:	19W	IP Schutzart:	IP20
Number of wires:	2	Color temperature:	3.000K		
Cable end processing:	tinned	Weight:	75g		
Cable conversion:	PVC	CRI:	>90		

**LED-STRIP FLEXIBEL IP20 24V 19,2W/M 1860LM/M 4000K RA>90 240 LEDS B=8MM ROLLE À 5 M**



**Product number**

**2120-2419-1815-9400**

**LED-STRIP FLEXIBEL IP20 24V 24W/M 2265LM/M 3.000K RA>90 300LEDS/M RÜCKSEITIG 3M TAPE ROLLE À 5 M**



**Product number**

**2120-2424-2265-9300**

Height	1.3mm	Cable conversion:	PVC	CRI:	>90
Width	8mm	Power supply:	CV	Cable cross section:	0,5mm <sup>2</sup>
Länge:	5000mm	At CV:	24	Cable type:	twin strands
Number of poles:	2	beam angle:	120 degrees	Surface and color:	white
Channels:	1	Cable length:	95mm	IP Schutzart:	IP20
Light output:	2265lm	Color temperature:	3.000K		
Number of wires:	2	Weight:	75g		
Cable end processing:	tinned	Power consumption:	24W		

**LED-STRIP FLEXIBEL IP20 24V 24W/M 2320LM/M 4.000K RA>90 300LEDS/M RÜCKSEITIG 3M TAPE ROLLE À 5 M**



**Product number**

**2120-2424-2320-9400**

Width	10mm	IP Schutzart:	IP20
Länge:	5000mm		
Light output:	2320lm		
Power supply:	CV		
At CV:	24		
Color temperature:	4.000K		
CRI:	>90		
Surface and color:	white		

**LED-STRIP FLEXIBEL IP20 24V 32W/M 3180LM/M 3000K RA>90 420LEDS/M B=8 MM 5M/ROLLE**



**Product number**

**2120-2432-3180-9300**

Height	1.3mm	Power supply:	CV	CRI:	>90
Width	8mm	At CV:	24	Cable cross section:	0,5mm <sup>2</sup>
Länge:	5000mm	beam angle:	120 degrees	Cable type:	twin strands
Number of poles:	2	Power consumption:	32W	Surface and color:	white
Channels:	1	Cable length:	95mm	IP Schutzart:	IP20
Number of wires:	2	Light output:	3180lm		
Cable end processing:	tinned	Color temperature:	3.000K		
Cable conversion:	PVC	Weight:	75g		

**LED-STRIP FLEXIBEL IP20 24V 32W/M 3180LM/M 4000K RA>90 420LEDS/M B=8 MM 5M/ROLLE**



**Product number**

**2120-2432-3180-9400**


**LED-STRIP FLEXIBEL IP20 24V 32W/M 3260LM/M 4000K RA>90 420LEDS/M B=8 MM 5M/ROLLE**



**Product number 2120-2432-3260-9400**

Width	8mm	IP Schutzart:	IP20
Länge:	5000mm		
Power supply:	CV		
At CV:	24		
Power consumption:	32W		
Color temperature:	4.000K		
Light output:	3260lm		
CRI:	>90		

**LED-STRIP VERDREHBAR IP20 24V 7,2W/M 540LM/M 2700K RA>90 60 LEDS/M RÜCKSEITIG 3M TAPE ROLLE À 5 M 100MM TEILBAR**



**Product number 2121-2407-0540-9270**


**LED-STRIP FLEXIBEL IP44 24V 9,6W/M 1000LM/M 3500K RA>90 140 LEDS/M B=10,5 MM**



**Product number 2144-2409-1000-9350**

Height	1.5mm	Cable conversion:	PVC	Light output:	1000lm
Width	10.5mm	Surface:	PUR-Polyurethan	IP Schutzart:	IP44
Länge:	5000mm	Power supply:	CV	CRI:	>90
Number of poles:	2	Power consumption:	10W	Cable cross section:	0,5mm <sup>2</sup>
Channels:	1	At CV:	24	Cable type:	twin strands
Number of wires:	2	beam angle:	120 degrees	Surface and color:	white
Cable end processing:	tinned	Cable length:	95mm		
Color temperature:	3.500K	Weight:	85g		

**LED-STRIP FLEXIBEL IP65 24V 19,2W/M 1200LM/M 2700K RA>85 B=10,5MM 5M/ROLLE**



**Product number 2165-2419-1200-8270**

**LED-STRIP FLEXIBEL IP65 24V 19,2W/M 1200LM/M 3000K RA>85 B=10,5MM 5M/ROLLE**



**Product number**

**2165-2419-1200-8300**

Height	1.4mm	Surface:	PUR-Polyurethan	Color temperature:	3.000K
Width	10.5mm	Power supply:	CV	Weight:	85g
Länge:	5000mm	CRI:	>85	IP Schutzart:	IP64
Number of poles:	2	Light output:	1200lm	Cable cross section:	0,5mm <sup>2</sup>
Channels:	1	At CV:	24	Cable type:	twin strands
Number of wires:	2	beam angle:	120 degrees	Surface and color:	white
Cable end processing:	tinned	Cable length:	95mm		
Cable conversion:	PVC	Power consumption:	19W		

**LED-STRIP FLEXIBEL IP65 24V 9,6W/M 790LM/M 2700K RA>85 B=8,5MM 5M/ROLLE**



**Product number**

**2165-2496-0790-8270**

Width	8.5mm	IP Schutzart:	IP64
Länge:	5000mm		
Power consumption:	9W		
Color temperature:	2.700K		
Light output:	790lm		
Power supply:	CV		
CRI:	>85		
At CV:	24		