





LED COMPONENTS
LED ASSEMBLIES

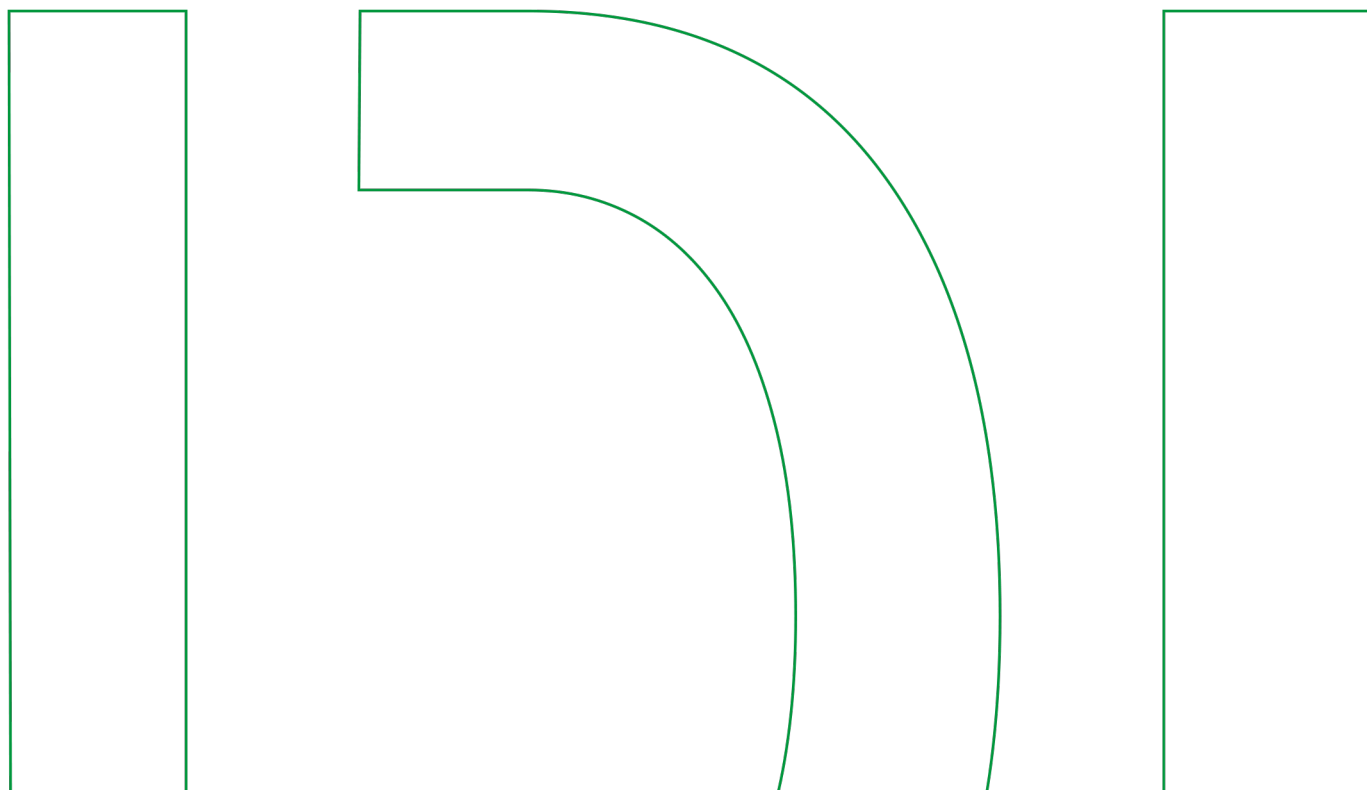

LED-MODUL 92X12MM 150MA 36V 6W 900LM 3.000K CRI>90 F. BLACKLINE M



Product number

1300-0092-1000-9300

Width: 12mm
Länge: 92mm
Screw-on: Yes
Solder pad: Yes
Power supply: CC
Light output: 900lm
Color temperature: 3.000K
At CC: 150mA

Material: Aluminium
Power consumption: 6W
Board material: aluminium core
CRI: >90
Surface and color: white

LED-MODUL 95X12MM 150MA 36V 6W 900LM 3.000K CRI>90 F. BLACKLINE S




Product number

1300-0095-1000-9300

Width: 12mm
Länge: 95mm
Screw-on: Yes
Solder pad: Yes
Power supply: CC
Light output: 900lm
Material: Stainless steel
Color temperature: 3.000K

At CC: 150mA
Power consumption: 6W
Board material: aluminium core
CRI: >90
Surface and color: white

LED-MODUL 95X12MM 150MA 36V 6W 900LM 4.000K CRI>90 F. BLACKLINE S



Product number

1300-0095-1000-9400

Width: 12mm
Länge: 95mm
Screw-on: Yes
Solder pad: Yes
Power supply: CC
Light output: 900lm
At CC: 150mA
Material: Aluminium

Color temperature: 4.000K
Power consumption: 6W
Board material: aluminium core
CRI: >90
Surface and color: white

LED LEUCHTSOCKEL 150X30MM 3W 250LM IP44 CRI>80 3000K



Product number

8350-0150-2503-4483

Height: 30mm
Number of poles: 2
Channels: 1
Surface and color: silver
Board material: FR4
Cable length: 5000mm
Plug: Yes
Light output: 250lm

CRI: >80
Outer diameter: 150,0mm
beam angle: 120 degrees
Power consumption: 3W
Power supply: AC - 230V
Color temperature: 3.000K
IP Schutzart: IP44
Material: Plastic

LED LEUCHTSOCKEL 225X30MM 3W 250LM IP44 CRI>80 3000K




Product number	8350-0225-2503-4483		
Height	30mm	CRI:	>80
Number of poles:	2	beam angle:	120 degrees
Channels:	1	Power consumption:	3W
Surface and color:	silver	Power supply:	AC - 230V
Board material:	FR4	Color temperature:	3.000K
Cable length:	5000mm	IP Schutzart:	IP44
Plug:	Yes	Outer diameter:	225,0mm
Light output:	250lm	Material:	Plastic

LED PROFIL BREIT MONTIERT M. TASTDIMMER 21,6W 772 MM LG. DIMM2WARM 2200-4000K CRI>90 ELOXIERT




Product number	8920-0216-0772-9019		
Height	12mm	Channels:	2
Width	40mm	Power supply:	CV
Länge:	772mm	Light output:	2590lm
Screw-on:	Yes	At CV:	24
Number of poles:	2	beam angle:	120 degrees
Plug contact:	Yes	Color temperature:	2.200K
Power consumption:	21,6W	Board material:	aluminium core
Control:	Yes	CRI:	>90
		IP Schutzart:	IP20

LED PROFIL BREIT MONTIERT M. TASTDIMMER 32,4W 1157 MM LG. DIMM2WARM 2200-4000K CRI>90 ELOXIERT




Product number	8920-0324-0772-9019		
Height	12mm	Channels:	2
Width	40mm	Power supply:	CV
Länge:	1157mm	At CV:	24
Screw-on:	Yes	beam angle:	120 degrees
Number of poles:	2	Color temperature:	2.200K
Plug contact:	Yes	Light output:	3890lm
Power consumption:	32,4W	Board material:	aluminium core
Control:	Yes	CRI:	>90
		IP Schutzart:	IP20

LED PROFIL BREIT MONTIERT M. TASTDIMMER 43,2W 1542 MM LG. DIMM2WARM 2200-4000K CRI>90 ELOXIERT




Product number	8920-0432-1542-9019		
Height	12mm	Light output:	5200lm
Width	40mm	Power supply:	CV
Länge:	1542mm	At CV:	24
Screw-on:	Yes	beam angle:	120 degrees
Number of poles:	2	Color temperature:	2.200K
Plug contact:	Yes	Power consumption:	43,2W
Control:	Yes	Board material:	aluminium core
Channels:	2	CRI:	>90
		IP Schutzart:	IP20

LED PROFIL SCHMAL 260 MM LG. TUNEABLE WHITE 7,0W 651LM 2200-4000K CRI>90 ELOXIERT




Product number	8925-0007-0260-9019	
Height	11.34mm	Surface and color:anodized
Width	18.4mm	Material: Aluminium
Länge:	260mm	CRI: >90
Number of poles:	3	IP Schutzart: IP20
Power supply:	CV	
At CV:	24	
Light output:	651lm	
Power consumption:	7W	

LED PROFIL SCHMAL 1.157 MM LG. TUNEABLE WHITE 22,1W 2.100LM 2200-4000K CRI>90 M. ENDKAPPEN ELOXIERT




Product number	8925-0221-1157-9019	
Height	17.4mm	Surface and color:anodized
Width	18.4mm	Light output: 2100lm
Länge:	1157mm	IP Schutzart: IP40
Clipable:	yes	Material: Aluminium
Number of poles:	3	Cable length: 500mm
Power supply:	CV	CRI: >90
Power consumption:	22W	
At CV:	24	

LED PROFIL SCHMAL 912 MM LG. TUNEABLE WHITE 25,2W 24VDC 2.340LM 2200-4000K CRI>90 M. ENDKAPPEN ELOX




Product number	8925-0252-0912-9019	
Height	11.43mm	Surface and color:anodized
Width	18.4mm	Material: Aluminium
Länge:	912mm	CRI: >90
Channels:	3	IP Schutzart: IP20
Power supply:	CV	
Light output:	2340lm	
Power consumption:	25W	
At CV:	24	

LED PROFIL SCHMAL 1.157 MM LG. TUNEABLE WHITE 32,2W 2.990LM 2200-4000K CRI>90 M. ENDKAPPEN ELOXIERT




Product number	8925-0322-1157-9019	
Height	11.43mm	Material: Aluminium
Width	18.4mm	CRI: >90
Länge:	1157mm	
Channels:	3	
Power supply:	CV	
At CV:	24	
Surface and color:	anodized	
Light output:	2990lm	

LED PROFIL SCHMAL 1.542 MM LG. TUNEABLE WHITE 42,7W 24VDC 3.970LM 2200-4000K CRI>90 M. ENDKAPPEN ELO




Product number	8925-0427-1542-9019		
Height	11.43mm	Cable length:	500mm
Width	18.4mm	CRI:	>90
Länge:	1542mm	Power consumption:	42W
Power supply:	CV	IP Schutzart:	IP20
Light output:	3970lm		
At CV:	24		
Surface and color:	anodized		
Material:	Aluminium		

LED PROFIL CD12 720 MM LG. M. INTEGRIERTEM PROXI DIMMER TUNEABLE WHITE 16,8W 24VDC 1.862LM 2200-3000K CRI>93 ELOXIERT




Product number **8926-0168-0720-9019**

LED PROFIL CD12 920 MM LG. M. INTEGRIERTEM PROXI DIMMER TUNEABLE WHITE 21,6W 24VDC 2.394LM 2200-3000K CRI>93 ELOXIERT



Product number **8926-0216-0920-9019**

LED PROFIL CD12 1210 MM LG. M. INTEGRIERTEM PROXI DIMMER TUNEABLE WHITE 28,8W 24VDC 3.192LM 2200-3000K CRI>93 ELOXIERT



Product number **8926-0288-1210-9019**